

Heavy Duty

ELECTRIC CHAIN HOIST



High Safety
Technology



Strong Hoist &
Reliable

Verkrönn Electric Hoist is equipped with mature technology, therefore it can provide long-term stable operation which is very important for production efficiency. With the good reputation of thousands of customers, Verkrönn will always be the most trustworthy and reliable choice of economic lifting solutions.

ELECTRIC CHAIN HOIST CONTENT

Wind Power Electric Chain Hoist

03

Wind Power Electric Chain Hoist with Trolley

04

Wind Power Electric Chain Hoist

05

Explosion-Proof Hook Electric Chain Hoist

06

Explosion-Proof Electric Chain Hoist with Trolley

08

Metallurgical Electric Chain Hoist

10

Wind Power

ELECTRIC CHAIN HOIST



High Safety
Technology



Strong Hoist &
Reliable

VEWP0.1-01M

Capacity	100KG
Lifting Speed	18m/min
Motor Power	0.56KW
Rotation Speed	2880r/min
Insulation Grade	F
Power Supply	3P/220V – 690V/50HZ
Control Voltage	24V
No.of chain	1
Spec.of load chain	Φ4.0

VERKRÖNN
Schwerlast Hebezeugkranen



Extra Strong
Hook



Remote Control
Hoist

BEST PERFORMANCE ELECTRIC HOIST

Verkrönn Electric Hoist is equipped with mature technology, therefore it can provide long-term stable operation which is very important for production efficiency. With the good reputation of thousands of customers, Verkrönn will always be the most trustworthy and reliable choice of economic lifting solutions.

Wind Power

ELECTRIC CHAIN HOIST



High Safety
Technology



Strong Hoist &
Reliable

VCWPT0.3-01M

Capacity	300KG
Lifting Speed	16m/min
Motor Power	0.9KW
Rotation Speed	2880r/min
Insulation Grade	F
Power Supply	3P/220V – 690V/50HZ
Control Voltage	24V
No.of chain	1
Spec.of load chain	Φ6.3



Extra Strong
Hook



Remote Control
Hoist

BEST PERFORMANCE ELECTRIC HOIST

Verkrönn Electric Hoist is equipped with mature technology, therefore it can provide long-term stable operation which is very important for production efficiency. With the good reputation of thousands of customers, Verkrönn will always be the most trustworthy and reliable choice of economic lifting solutions.

Wind Power

ELECTRIC CHAIN HOIST



High Safety
Technology



Strong Hoist &
Reliable

VCWP0.6-01M

Capacity	600KG
Lifting Speed	13m/min
Motor Power	1.5KW
Rotation Speed	2880r/min
Insulation Grade	F
Power Supply	3P/220V – 690V/50HZ
Control Voltage	24V
No.of chain	1
Spec.of load chain	Φ7.1



Extra Strong
Hook



Remote Control
Hoist

BEST PERFORMANCE ELECTRIC HOIST

Verkrönn Electric Hoist is equipped with mature technology, therefore it can provide long-term stable operation which is very important for production efficiency. With the good reputation of thousands of customers, Verkrönn will always be the most trustworthy and reliable choice of economic lifting solutions.

Explosion-Proof Hook **ELECTRIC HOIST**



High Safety
Technology



Strong Hoist &
Reliable



Extra Strong
Hook




Remote Control
Hoist

BEST PERFORMANCE ELECTRIC HOIST

Verkrönn Electric Hoist is equipped with mature technology, therefore it can provide long-term stable operation which is very important for production efficiency. With the good reputation of thousands of customers, Verkrönn will always be the most trustworthy and reliable choice of economic lifting solutions.

Size Specifications

Model	H	A	B	D	E	K	L
VCEP01-01	410	665	365	295	175	24	34
VCEP1.5-01	615	755	408	370	230	30	40
VCEP02-01	615	755	408	420	280	30	40
VCEP02-02	610	665	365	295	210	30	40
VCEP2.5-01	615	755	408	420	295	35	48
VCEP03-01	615	755	408	420	295	35	48
VCEP03-02	820	755	408	420	295	35	48
VCEP05-02	820	755	408	420	295	44	48

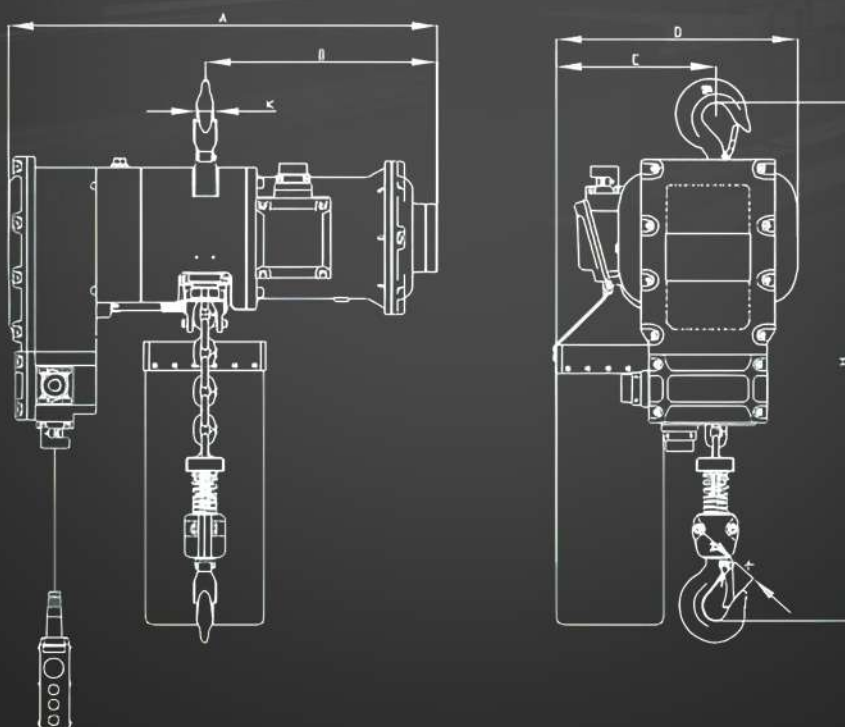

Technical Parameters

Model	Capacity (t)	Lifting Speed (m/min)	Motor Power (kw)	Rotation Speed (r/min)	Insulation	Power Supply	Control Voltage	No. of Chain	Spec. of Load Chain
VCEP 01-01	1	6.3	1.5	1440	F	3P/220V – 690V/50Hz	24V	1	Φ7.1
VCEP 1.5-01	1.5	8.5	3.0	1440	F	3P/220V – 690V/50Hz	24V	1	Φ10.0
VCEP 02-01	2	6.9	3.0	1440	F	3P/220V – 690V/50Hz	24V	1	Φ10.0
VCEP 02-02	2	3.2	1.5	1440	F	3P/220V – 690V/50Hz	24V	2	Φ7.1
VCEP 2.5-01	2.5	6.6	3.0	1440	F	3P/220V – 690V/50Hz	24V	1	Φ11.2
VCEP 03-01	3	6.6	3.0	1440	F	3P/220V – 690V/50Hz	24V	1	Φ11.2
VCEP 03-02	3	4.2	3.0	1440	F	3P/220V – 690V/50Hz	24V	2	Φ10.0
VCEP 05-02	5	3.3	3.0	1440	F	3P/220V – 690V/50Hz	24V	2	Φ11.2

Explosion-Proof **ELECTRIC HOIST** WITH TROLLEY



High Safety
Technology



Strong Hoist &
Reliable



Extra Strong
Hook




Remote Control
Hoist

BEST PERFORMANCE ELECTRIC HOIST

Verkrönn Electric Hoist is equipped with mature technology, therefore it can provide long-term stable operation which is very important for production efficiency. With the good reputation of thousands of customers, Verkrönn will always be the most trustworthy and reliable choice of economic lifting solutions.

Size Specifications

Model	H	A	B	E	R	T
VCEPT01-01	430	665	365	111	295	180
VCEPT1.5-01	640	755	408	127	295	180
VCEPT02-01	640	755	408	127	295	180
VCEPT02-02	700	665	365	127	295	180
VCEPT2.5-01	650	755	408	140	295	180
VCEPT03-01	650	755	408	140	295	180
VCEPT03-02	790	755	408	140	295	180
VCEPT05-02	865	755	408	156	295	180

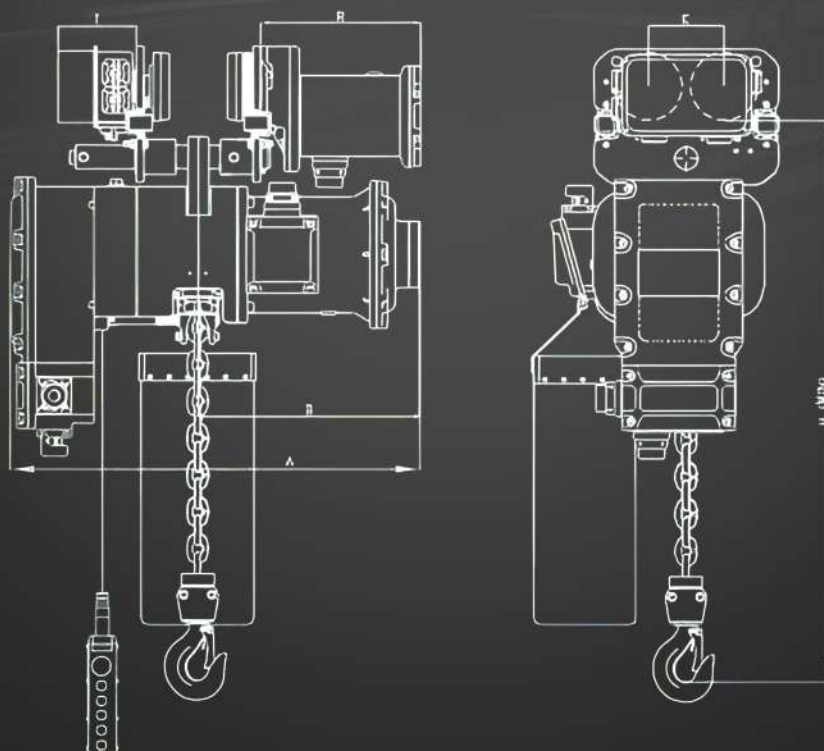

Technical Parameters

Model	Capacity (t)	Lifting Speed (m/min)	Motor Power (kw)	Travelling Power (kw)	Rotation Speed (r/min)	Insulation	Power Supply	Control Voltage	No. of Chain	Spec. of Load Chain
VCEPT01-01	1	6.3	1.5	11/21	1440	F	3P/220V – 690V/50Hz	24V	1	Φ7.1
VCEPT1.5-01	1.5	8.5	3.0	11/21	1440	F	3P/220V – 690V/50Hz	24V	1	Φ10.0
VCEPT02-01	2	6.9	3.0	11/21	1440	F	3P/220V – 690V/50Hz	24V	1	Φ10.0
VCEPT02-02	2	3.2	1.5	11/21	1440	F	3P/220V – 690V/50Hz	24V	2	Φ7.1
VCEPT2.5-01	2.5	6.6	3.0	11/21	1440	F	3P/220V – 690V/50Hz	24V	1	Φ11.2
VCEPT0.3-01	3	6.6	3.0	11/21	1440	F	3P/220V – 690V/50Hz	24V	1	Φ11.2
VCEPT0.3-02	3	4.3	3.0	11/21	1440	F	3P/220V – 690V/50Hz	24V	2	Φ10.0
VCEPT0.3-03	5	3.3	3.0	11/21	1440	F	3P/220V – 690V/50Hz	24V	2	Φ11.2

Metallurgical **ELECTRIC HOIST**



High Safety
Technology



Strong Hoist &
Reliable



Extra Strong
Hook




BEST PERFORMANCE ELECTRIC HOIST

Verkrönn Electric Hoist is equipped with mature technology, therefore it can provide long-term stable operation which is very important for production efficiency. With the good reputation of thousands of customers, Verkrönn will always be the most trustworthy and reliable choice of economic lifting solutions.

Size Specifications

Model	H	A	B	D	E	R	L
VEMT0.5+0.5t	650	530	L+520	95	111	230	145
VEMT01+01t	665	600	L+590	95	111	230	145
VEMT1.5+1.5t	785	705	L+720	110	127	230	145
VEMT02+02t	785	705	L+720	110	127	230	145
VEMT2.5+2.5t	785	705	L+720	125	140	230	145

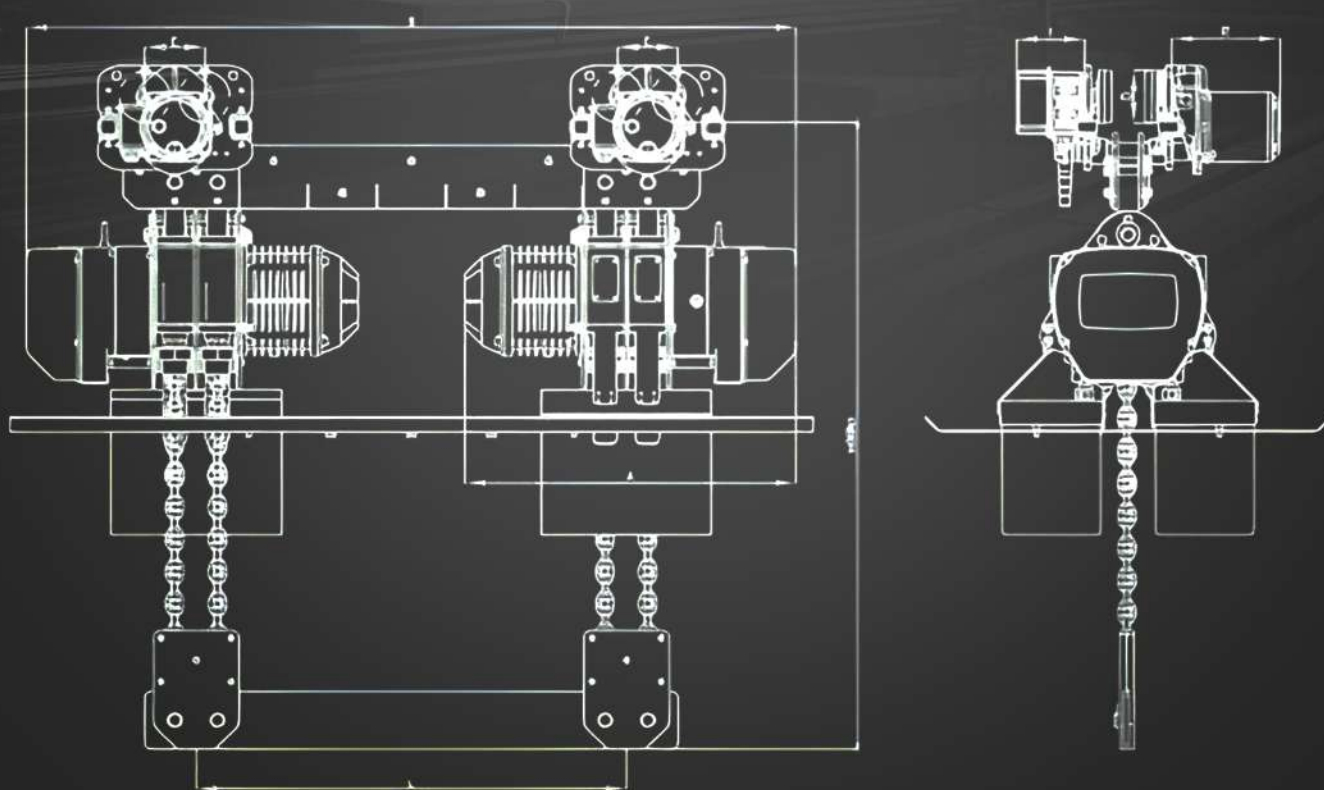

Technical Parameters

Model	Capacity (t)	Lifting Speed (m/min)	Motor Power (kw)	Rotation Speed (r/min)	Insulation	Power Supply	Control Voltage	No. of Chain	Spec. of Load Chain
VEMT0.5+0.5t	1	7.2	0.8*2	1440	F	3P/220V – 690V/50Hz	24V	2x2	Φ6.3
VEMT01+01t	2	6.6	1.5*2	1440	F	3P/220V – 690V/50Hz	24V	2x2	Φ7.1
VEMT1.5+1.5t	3	8.8	3.0*2	1440	F	3P/220V – 690V/50Hz	24V	2x2	Φ10.0
VEMT02+02t	4	6.6	3.0*2	1440	F	3P/220V – 690V/50Hz	24V	2x2	Φ10.0
VEMT2.5+2.5t	5	5.4	3.0*2	1440	F	3P/220V – 690V/50Hz	24V	2x2	Φ11.2



PT. INDOTARA PERSADA

Our Marketing Office and After Sales Service Center

Head Office

50/F, Menara BCA Grand Indonesia
Jl. M.H. Thamrin No.1
Jakarta Pusat 10310

021 - 5011 2226

dhc@indotara.id



Semarang Office

Wisma HSBC Lt. 6 Suite 609
Jl. Gajah Mada No.135
Semarang, Jawa Tengah 50134

024 - 40 300 891

smg.dhc@indotara.id



Marketing Office

APL Tower 6th Floor No. 6 Central Park,
Jl. Letjen S. Parman Kav 28,
Jakarta Barat - 11440

021 - 5011 2226

dhc@indotara.id



Medan Office

Sutomo Tower Lantai 5H
Jl. Sutomo Ujung No.28,
Kota Medan, Sumatera Utara 20235

061 - 50 300 593

mdn.dhc@indotara.id



Graha Indotara

Millenium Industrial Estate
Jl. Millenium 22 Blok R3 No. 1
Cikupa, Tangerang - Banten 15720

021 - 5011 2226

dhc@indotara.id



Makassar Office

Fajar Graha Pena Lt. 5
Jl. Urip Sumoharjo No. 20,
Makassar - South Sulawesi 90234

021 - 5011 2226

mks.dhc@indotara.id



Bandung Office

Wisma HSBC Lt. 6 Suite B
Jl. Asia Afrika No. 116
Bandung, Jawa Barat 40112

021 - 5011 2226

bdg.dhc@indotara.id



Balikpapan Office

Panin Tower Lt. 8 - Grand Sudirman
Jl. Jendral Sudirman No.7 Klandasan Ilir,
Balikpapan Kota, Kalimantan Timur 76114

021 - 5011 2226

bpp.dhc@indotara.id



Surabaya Office

Japfa Indoland Center, Tower I Lt. 10/1008
Jl. Jendral Basuki Rahmat 129-137
Surabaya 60271

021 - 5011 2226

sby.dhc@indotara.id



Bali Office

Benoa Square Lt. 2
Jl. Bypass Ngurah Rai No. 21 A Kedonganan,
Kuta Badung - Bali Indonesia 80361

021 - 5011 2226

bali.dhc@indotara.id




Yogyakarta Office

Hartono Mall Yogyakarta Lt. 3
Kaliwaru, Condongcatur,
Sleman, Yogyakarta 55281

021 - 5011 2226

yog.dhc@indotara.id



Singapore Office

Marina Bay Financial Centre Tower 3
17F, 12 Marina Boulevard
Singapore - 018982

021 - 5011 2226

sing.dhc@indotara.id

