



**3** YEARS OR **2000** HOURS  
**WARRANTY**  
ENGINE & HYDRAULIC



# ATTACHMENT BROCHURE

## SKID STEER LOADER



## CONTENTS:

1

- BUCKET
- PALLET FORKS
- COMBINATION BUCKET

2

- ROCK BUCKET
- SWEEPER
- ANGLE BROOM

3

- BREAKER
- SNOW BLADE
- BLADE

4

- PLANER
- SNOW BLOWER
- SNOW V-BLADE

5

- SNOW BUCKET
- SNOW PUSHER
- VIBRATORY ROLLER

6

- PD VIBRATORY ROLLER
- WHEEL TRENCHER
- SCRAPER

7

- CONCRETE MIXER
- DIGGER
- BACKHOE (MINI TYPE)

8

- BACKHOE
- TRENCHER
- AUGER

9

- ROTARY TILLER
- TREE SPADE
- LEVELLER

10

- LAWN MOWER (MINI TYPE)
- LAWN MOWER
- TREE SHEAR

11

- RIPPER
- ADJUSTABLE MANURE SCRAPER.
- GRASS FORK
- BALE SPEAR

12

- ROTARY COW BED LOOSE
- AGRICULTURAL FORK
- THROWER
- SITE LOOSE MACHINE
- SILAGE LOADER BUCKET



## BUCKET

Model	TX-010143M	TX-010172	TX-010184
Suitable for	TX323S-TY325T	TX350S-TX365S	TX375S-TX395V
Length(mm)	519	812	812
Width(mm)	1150	1740	1880
Height(mm)	322	508	508
Capacity(m <sup>3</sup> )	0.15	0.45	0.5
Weight(kg)	110	210	220

Suitable for loading and unloading of materials in any environment ,convenient, flexible ,meets the requirements of small space.



## PALLET FORKS



Model	TX-010338M	TX-010345	TX-010360
Suitable for	TX323S-TX325T	TX350S-TX395V	
Rated load (kg)	107	1000	1500
Length of fork (mm)	850	1000	1000
Length(mm)	988	1280	1280
Width (mm)	906	1160	1524
Height (mm)	430	850	850
Self-weight (kg)	85	180	207

The pallet forks can convenient transportation the commodity , It widely use in logistics,gardens, warehouse, factories,building,etc.

## COMBINATION BUCKET

Model	TX-010243M	TX-010272	TX-010284
Suitable for	TX323S-TX325T	TX350S-TX395V	
Bucket capacity (m <sup>3</sup> )	0.15	0.5	0.6
Length (mm)	1223	1828	2133
Width(mm)	595	920	920
Height (mm)	525	660	660
Weight(kg)	113	410	450

Integrates the functions of loader,excavator and forklift, can complete bulldozing, Grasping, Leveling ,Digging, Loading and Unloading. Application: Widely applied Municipal construction,Landscaping, Power station, Forests, Building construction, etc.



## ROCK BUCKET

Model	TX-010445M	TX-010472	TX-010484
Suitable for	TX323S-TX325T	TX350S-TX395V	
Working width (mm)	1066	1676	2130
Tooth space (mm)	51	68	68
Weight (kg)	85	223	263
Length (mm)	635	876	876
Width (mm)	1066	1676	2130
Height (mm)	357	508	508



The rock bucket can allow the dirt and gravel fall way while collecting and transfer larger rock, can also be screened out the debris ,small stone or other larger objects and transfer out form soil.

## SWEeper



Model	TX-020145M	TX-020172
Suitable for	TX323S-TX325T	TX350S-TX395V
Working width (mm)	1050	1727
Brush diameter (mm)	560	660
Bucket capacity (m <sup>3</sup> )	0.15	0.4
Working pressure (Mpa)	16~18	16~21
Working flow (L/min)	75~90	50~125
Weight (kg)	240	400
Length (mm)	1126	1289
Width (mm)	1430	1876
Height (mm)	590	669

The sweeper adopted the hydraulic driving, It is easy to operation forward and backward to clean the dirt and waste on ground. It is perfect to cleaning the plaza, road, plant road, parking lots, sidewalk, docks, warehouse, ports,etc. It can also be used to spread material evenly across a site, It can cleaning the road behind big milling planer. The sweeper to working with skid steer loader is a perfect mechanized combination for you.

## ANGLE BROOM

Model	TX-020245M	TX-020272	TX-020284
Suitable for	TX323S-TX325T	TX350S-TX375S	TX380V-TX395V
Working width (mm)	1050	1828	2133
Sweep width (30°angle) (mm)	910	1625	1965
Brush diameter (mm)	500	812	812
Rotation angle (°)	30	30	30
Weight (kg)	142	441	498
Total width (mm)	1386	2095	2400



The angle Broom is an economical way cleaning equipment. With a reversible motor by hydraulic driving, rotating the broom forward or backwards is no problem. Hydraulic driven bevel cleaner can be installed on skid steer loaders, It can clean driveway, sidewalks, parking , docks, warehouses and many occasions, especially to cleaning the snow on the road.



## BREAKER

Model	TX-020345M	TX-020360	TX-020368
Suitable for	TX323S-TX325T	TX350S-TX395V	
Operating weight (Kg)	132	360	370
Length (mm)	1160	1520	1680
Working pressure (Mpa)	8~11	9.5~13	10~14
Flow (L/min)	20~35	34~60	40~80
Impact energy (j)	80~100	600	700
Drill rod diameter	45	60	68



The product is loader mounted type breaker, and main use for skid steer loader, Use the power of machine hydraulic system to realize the function of the breaker. Application range: Mine, metallurgy , Municipal construction ,Road construction etc.

## SNOW BLADE

(mechanical or hydraulic controlling steering )



Model	TX-020445M	TX-020460	TX-020472	TX-020484
Suitable for	TX323S-TX325T	TX350S-TX395V		
Working width (mm)	1316	1520	1830	2130
Working width (steering 30°)	1150	1316	1585	1845
Height (mm)	500	580	580	580
Length (mm)	600	1207	1207	1207
Weight (kg)	120	320	350	380

The snow blade can convenient to cleaning the sno sidewalk, driveway, parking lots, docks, service area, etc

## BLADE

(mechanical or hydraulic controlling steering )

Model	TX-02054M	TX-020560	TX-020572	TX-020584
Suitable for	TX323S-TX325T	TX350S-TX395V		
Working width (mm)	1316	1520	1830	2130
Working width (steering 30°)	1150	1316	1585	1845
Height (mm)	500	580	580	580
Length (mm)	600	1207	1207	1207
Weight (kg)	120	320	350	380



The blade can working suitable for variety material . The blade can lateral swing 30 degree to left or to right, the shaft of blade can luffng 10 degree, It can better using to variety conditions.

## PLANER

Model	TX-020616	TX-020620	TX-020624
Suitable for	TX375S-TX395V		
Weight (Kg)	760	865	964
Cutting width (mm)	400	500	600
Max. Cutting depth (mm)	152	152	152
Flow range (L/min)	100-180	100-180	120-200
Number of cutter	48	56	64
Max. cutting angle (°)	±15	±15	±15
Width of side shift (mm)	660	660	660



The planer suitable for the cutting or renovation for asphalt and concrete road surface, can also use to cleaning the road hug, rutting, galling of cement road, snow on ground, coating of road surface, paint and all kinds of traffic marking, can also use to cleaning the marking and tire braking marking of airport runway.

## SNOW BLOWER



Model	TX-020745M	TX-020772	TX-020784
Suitable for	TX323S-TX325T	TX350S-TX395V	
Working width (mm)	1000	1828	2130
Blowing distance (m)	8~12	8~12	8~12
Weight (Kg)	366	538	680
Length (mm)	777	998	998
Width (mm)	1034	1860	2150
Height (mm)	864	1204	1204

1. The snow blower is an perfect equipment to clean the thick snow for driveway, sidewalk, parking lots and other areas;
2. Blowing snow can realize the 360 degree rotating positioning, very convenient for a variety of operating environments;
3. Blowing direction of blowing snow mouth can be adjustable, ensure the attachment blowing much snow smoothly, to achieve the ideal working effects;
4. Height of Support bracket can be adjustment, prevent the blade touching the gravel and paving the ground surface to damage;
5. Easily and conveniently to installation and dis-assembly
6. It is an ideal blowing snow machine with the quick blowing snow speed, can meet the requirements of rapid urban snow removal.

## SNOW V-BLADE

Model	TX-020860	TX-020872	TX-020884
Suitable for	TX323S-TX395V		
Working width (mm)	1520	1830	2130
Working width (Forward-V)(mm)	1346	1600	1880
Working width (Backward-V)(mm)	1372	1638	1905
Working width (Horizontal)(mm)	1575	1880	2184
Swing angle (°)	±10	±10	±10
Weight (Kg)	299	367	385



The function of snow V-blade is more excess than standard snow blade and snow bucket, It can realized cleaning , pile up and snowremoval ,It can suitable for all kinds off road snow cleaning according to the changing shape.



## SNOW BUCKET

Model	TX-020945M	TX-020972	TX-020984
Suitable for	TX23S-TX325T	TX350S-TX395V	
Working width (mm)	2170	2476	2782
Length (mm)	1010	1010	1010
Width (mm)	2170	2476	2782
Height (mm)	777	825	825
Weight (Kg)	180	210	240



The snow bucket can effectively remove the bulk of the snow and other loose materials.

## SNOW PUSHER



Model	TX-021060	TX-021072	TX-021084	TX-021096
Suitable for	TX350S - TX395V			
Length (mm)	1290	1290	1290	1290
Width (mm)	1672	1982	2282	2592
Height (mm)	1143	1143	1143	1143
Working width (mm)	1520	1830	2130	2440
Depth (mm)	1032	1032	1032	1032
Weight (Kg)	481	551	622	692

It can realized the high efficiency snow removal on unevenness road surface.

## VIBRATORY ROLLER

Model	TX-021236M	TX-021272	TX-021284
Suitable for	TX323S-TX325T	TX350S-TX385V	TX390V-TX395V
Drum width (mm)	914	1855	2134
Drum diameter (mm)	530	609	609
Vibration force (KN)	20	3900	4300
Vibration frequency (Vpm)	2600	2600	2600
Weight (Kg)	323	1104	1231
Length (mm)	864	990	990
Width (mm)	1067	2007	2286
Height (Kg)	565	788	788



The roller can realized the compaction and leveling by the vibration device, it is a perfect compacting machine for road construction and leveling road surface.

## PD VIBRATORY ROLLER

Model	TX-021336M	TX-021372	TX-021384
Suitable for	TX323S-TX325T	TX350S-TX395V	
Drum width (mm)	914	1855	2134
Drum diameter (mm)	530	609	609
Vibration force (KN)	20	39	43
Vibration frequency (Vpm)	2600	2600	2600
Weight (Kg)	323	1044	1149
Length (mm)	864	990	990
Width (mm)	1067	2007	2286
Height (Kg)	565	788	788



The roller can realized the compaction and leveling by the vibration device,it is a perfect compacting machine for road construction and leveling road surface.

## WHEEL TRENCHER

Model	TX-021418	TX-021424
Suitable for	TX350S-TX385V	TX390V-TX395V
Cutter width (mm)	60~100	60~100
Cutting depth (mm)	450	600
Cutter diameter (mm)	1220	1525
Working pressure (Mpa)	16	16
Working flow (L/min)	100~125	100~125
Weight (kg)	900	1050
Length (mm)	1930	2185
Width (mm)	1700	1700
Height (mm)	2010	2060



The wheel trencher can be used to repair the roads, trenching the ditches for installing water, gas, electricity, and fiber optic cables, the pipeline interleaving layout, cutting asphalt, concrete and reinforced and icing on the ground, it is an ideal machine for highway maintenance and municipal construction.

Use high power and large torque output transmission system, make the product with better economic performance. Set up the protective device,The cutting depth can be adjusted.

## SCRAPER

Model	TX-021518	TX-021522
Suitable for	TX323S-TX395V	
Length(mm)	1270	1273
Width(mm)	1143	1150
Height(mm)	488	565
Cutter diameter (mm)	457	560
Weight(kg)	70	84.5
Deicing thickness (mm)	10-100	10-100



The scraper can remove the snow, ice and other hard objects on the ground quickly, ensure a safe condition for walking or driving.

Easily remove the ceramic tile from the ground.



## CONCRETE MIXER

Model	TX-030114M	TX-030116	TX-030208
Suitable for	TX323S-TX325T	TX350S-TX395V	
Roller (m <sup>3</sup> )	0.12	0.15	0.2
Speed (r/min)	5~15	5~30	5~30
Weight (Kg)	126	300	360
Length (mm)	1017	1200	1300
Width (mm)	762	1160	1200
Height (mm)	550	1100	1200



Compared with the conventional single mixer, it can be faster mixed, transported, and mixed concrete. Concrete mixer mounted on the compact loader can work easily on the sidewalks, driveways, decorations and the foundation and floor of the small buildings, and its drum can be rotated in either direction.

## DIGGER



The digger is used for excavating ditches, laying pipelines, etc, suitable for transport, municipal construction, landscaping, greening area, farmland, water conservancy and other building construction.

Model	TX-030204M	TX-030206	TX-030208
Suitable for	TX323S-TX325T	TX350S-TX395V	
Length (mm)	1350	1430	1430
Width (mm)	603	1210	1210
Height (mm)	720	750	750
Weight (kg)	126	230	260
Excavator grab width (mm)	260	435	485
Excavator grab capacity (m <sup>3</sup> )	0.03	0.04	0.05
Digging depth (mm)	1530	1675	1675

## BACKHOE (MINI TYPE)

Model	TX-030330
Suitable for	TX323S-TX325T
Length (mm)	1206
Width (mm)	1196
Height (mm)	1600
Weight (kg)	185
Max. Digging radius (mm)	2271
Bucket Capacity (m <sup>3</sup> )	0.014
Max. Digging depth (mm)	1360
Digging force of bucket (KN)	33



The digger is used for excavating ditches, laying pipelines, etc, suitable for transport, municipal construction, landscaping, greening area, farmland, water conservancy and other building construction.

## BACKHOE

Model	TX-030370	TX-030380
Suitable for	TX350S-TX395V	
Shipping width (mm)	1889	2090
Min width of outrigger (mm)	1480	1480
Working width of outrigger (mm)	2250	2250
Max. Digging depth (mm)	2200	2200
Max. Working radius (mm)	2890	3200
Max. Working height (mm)	2755	2980
Max. Loading height (mm)	1676	1910
Swing angle (°)	120	120
Bucket capacity (m <sup>3</sup> )	0.04	0.045
Weight (Kg)	540	590



The machine can be attached on the skid steer loaders for mining tunnels, and widely used for pipelines of the gas, water, electricity, telecommunications, and landscaping etc.

## TRENCHER



Model	TX-050136M	TX-050136 (With planetary reducer)
Suitable for	TX323S-TX325T	TX350S-TX395V
Digging width (mm)	150/200	150/200/300
Digging depth (mm)	900	900
Length (mm)	1774	1910
Width (mm)	1073	1062
Height (mm)	857	900
Weight (kg)	220	330

The machine is mainly used for trenching, laying underground pipelines, slotted farmland, urban and rural optical cable. Can be easily adjusted the ditching depth, the trencher can be quickly installed in front of the skid steer loaders by mounting frame.

Chain of trencher type: 1) General soil 2) Carbide for rock 3) Carbide

## AUGER

Model	TX-050232M	TX-050275
Suitable for	TX323S-TX325T	TX350S-TX395V
Drilling diameter (mm)	150/200/300/400/600	150/200/300/400/600/900
Drilling Depth (mm)	0~1000	0~1000
Motor Displacement (L/min)	42	75-90
Torque (N.m)	2452	4535



The auger can be matched with skid steer loaders, used for digging the hole when afforest, digging the holes to fix the wire rods on the both sides of road, high work efficiency and easy to use.

Drilling bit type: 1)General soil 2)Flat carbide 3)Carbide



## ROTARY TILLER

Model	TX-050345M	TX-050372	TX-050384
Suitable for	TX323S-TX325T	TX350S-TX395V	
Length (mm)	1320	2322	2620
Width (mm)	594	2060	2360
Height (mm)	475	600	600
Weight (kg)	98	480	630
Working width (mm)	1000	1828	2130
Number of bits (Pcs)	25	44	52
Working depth (mm)	60~150	100~150	100~150



The rotary tiller is matched with the skid steer loader to complete the plow and rake. With the strong ability to cut the soils into pieces and let the ground surface flat, also can be cut down the tree trunks below the ground, ensure sow easily, It is a perfect machine for gardens and agriculture because saving time and effort .

### 4 blades tree spade

The machine drives 4 digging blades to move into the soil within several minutes, makes the tree and its soil wrapped root held by the round space around by the 4 digging blades. And then it is raised slowly and up off the ground. By this way to realize the operator finishing quick digging, transporting and planting trees by sitting in the cab.



## TREE SPADE

Model	TX-050424	TX-050432
Suitable for	TX375S-TX395V	
Length (mm)	1798	1991
Width (mm)	1816	2027
Height (mm)	1217	1491
Weight (mm)	631	794
Digging depth (mm)	500	747
Bottom open diameter (mm)	100	160
Cutter angle (°)	25	25
Working flw (L/min)	20-65	20-65
Working pressure (mpa)	12-21	12-21
Tree diameter (mm)	20~50	50~100

## LEVELLER

Model	TX-050545M	TX-050560
Suitable for	TX323S-TX325T	TX350S-TX395V
Length(mm)	1115	1544
Width(mm)	1196	1386
Height(mm)	360	892
Working width (mm)	1196	1510
Weight(kg)	73	315



The attachment is mainly used for leveling the sands piles, soils piles, gravel piles and other piles, suitable for gardening and other workplaces. Convenient installation, flexible use, high efficiency, high quality, good performance, etc. The attachment with simple structure, strong reliability, convenient to maintain and repair.

## LAWN MOWER (MINI TYPE)

Model	TX-050645
Suitable for	TX323S-TX325T
Length(mm)	1260
Width (mm)	1360
Height (mm)	530
Working width (mm)	1070
Working height (mm)	25~100
Weight (kg)	184
Number of bits (Pcs)	3
Working flow (L/min)	25



Mainly applied for grassland, shrub land, the lawn mower used to mowing, cleaning, renew and reform the surface roughness pasture.

## LAWN MOWER



Model	TX-050666	TX-050672
Suitable for	TX350S-TX395V	
Length(mm)	2104	2360
Width (mm)	1880	1925
Height (mm)	736	738
Working width (mm)	1680	1828
Working height (mm)	≥50	≥50
Weight (kg)	780	890
Number of bits (Pcs)	2	2
Working flow (L/min)	50-100	50-100

Mainly applied for grassland, shrub land, the lawn mower used to mowing, cleaning, renew and reform the surface roughness pasture.

## TREE SHEAR

Model	TX-050812	TX-050816
Suitable for	TX350S-TX395V	TX350S-TX395V
Length(mm)	1900	2300
Width (mm)	833	900
Height (mm)	1304	1524
Weight (kg)	700	800
Working flow (L/min)	60-120	60-120
Working pressure (Mpa)	20	20
Max cutting diameter (mm)	300	400
Cutting blade material	NM400	NM400



The tree shear equipped blades driven by a pair of hydraulic cylinder to finish shearing action, and cut off the tree trunk.

The proper tree diameter is less than 400mm. This attachment is suitable installed with skid steer loader.



## RIPPER

Model	TX-050945M	TX-050972
Suitable for	TX323S-TX325T	TX350S-TX395V
Length(mm)	511	1620
Width (mm)	628	295
Height (mm)	350	758
Weight (kg)	52	210
Max. Working flow (L/min)	300	250
Tooth spacing (mm)	270	355



## ADJUSTABLE MANURE SCRAPER



The scraper has full steel structure and rubber edge bottom, and can each 3.4m when opening, cleaning large area effectively . It can convenient to adjusting the width of scraper to complete the working requirement .

Model	TX-060186
Suitable for	TX350S-395V
Length(mm)	2200
Width (mm)	660
Height (mm)	850
Opening width of blade (mm)	3400

## GRAS FORK

Model	TX-060372	TX-060384
Suitable for	TX350S-TX395V	
Length(mm)	728	728
Width (mm)	1830	2134
Height (mm)	870	870
Weight (kg)	510	620
Grabopening width (mm)	1222	1222
Tooth spacing (mm)	216	216



The machine adopted the hydraulic controlling and sharp teeth makes it firmly to grab, can quickly to operation and greatly improve the work efficiency.

## BALE SPEAR



Model	TX-060448	TX-060454
Suitable for	TX350S-395V	TX350S-395V
Length(mm)	1168	1168
Width (mm)	1220	1372
Height (mm)	584	584
Length of rod (mm)	1042	1042

The tool is installed on the skid loaders, it can be used for inserting the materials, such as grass, straw and branches. Widely used in grassland, pasture, farms and other places.pasture, farms and other places.

## ROTARY COW BED LOOSE MACHINE


<b>Model</b>	<b>TX-060772</b>
Suitable for	TX350S-TX395V
Length(mm)	1320
Width (mm)	1160
Height (mm)	840



The motor by hydraulic control to drive rotary cutter, to loose and leveling cow bed, greatly improve the cow bed rate and increase the milk production.

## AGRICULTURAL FORK

<b>Model</b>	<b>TX-060872</b>	<b>TX-060884</b>
Suitable for	TX350S-TX395V	
Length(mm)	1820	1820
Width (mm)	1140	1140
Height (mm)	540	540

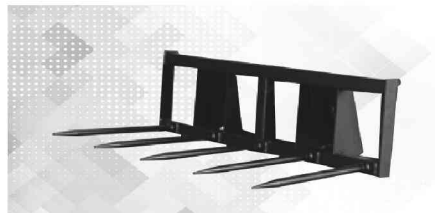

The machine can quickly to cleaning the weed and other objects of barn area

## THROWER

<b>Model</b>	<b>TX-060272</b>
Suitable for	TX350S-TX395V
Length(mm)	1820
Width (mm)	870
Height (mm)	800



Throw out the material to the barn area by the hydraulic motor drive, can also throw the dry cow dung or sand up to the barn area, loading fast, the machine can flexibility to turn in the barn and improve the productivity.

## SITE LOOSE MACHINE

<b>Model</b>	<b>TX-060984</b>
Suitable for	TX350S-TX395V
Length(mm)	1320
Width (mm)	1160
Height (mm)	840



The motor by hydraulic control to drive rotary cutter, to loose and leveling cow farm

## SILAGE LOADER BUCKET

<b>Model</b>	<b>TX-061072</b>
Suitable for	TX350S-TX395V
Length(mm)	1820
Width (mm)	960
Height (mm)	890



The silage loader bucket is the necessary equipment in pasture , drive motor and rotate cutter by hydraulic controlling to take the silage from silo, then direct loading the silage to TMR, improve the efficiency . Prevent secondary fermentation.





DIGGER



LAWN RIPPER



LEVELLER



AUGER




TRENCH FILLER



BREAKER



GRAPPLE



TRENCHER

# INDOTARA

WWW.INDOTARA.CO.ID

## Jakarta - Head Office

Graha Kencana Building  
Lantai 10 Suite 10F  
Jl. Raya Perjuangan No. 88  
Kebon Jeruk, Jakarta Barat 11530  
Phone : 021 - 5020 3030  
Email : sales@indotara.co.id

## Bandung Office

Wisma HSBC  
Lantai 6 Suite B  
Jalan Asia Afrika No.116,  
Kota Bandung, Jawa Barat 40112  
Phone : 022 - 310 30 800  
Email : sales-bdg@indotara.co.id

## Surabaya Office

Bumi Mandiri Tower I  
Lantai 10 Suite 1008  
JL. Jend.Basuki Rachmat 129-137,  
Surabaya 60271  
Phone : 031 - 3313 3333  
Email : sales-sby@indotara.co.id

## Medan Office

Kompleks MMTC WAREHOUSE  
Blok C-7  
Jl. Pasar V, Pancing,  
Medan, Sumut 20371  
Phone : 061-8003 2324  
Email : sales-mdn@indotara.co.id