

INDOTARA®

PT. INDOTARA PERSADA

Jakarta - Head Office

Graha Kencana Building
Lt. 10 Suite 10F
Jl. Raya Perjuangan No. 88
Kebon Jeruk, Jakarta Barat 11530
Phone : 021 - 5020 3030
Email : sales@indotara.co.id

Bandung Office

Wisma HSBC
Lt. 6 Suite B
Jalan Asia Afrika No.116,
Kota Bandung, Jawa Barat 40112
Phone : 022 - 310 30 800
Email : sales-bdg@indotara.co.id

Surabaya Office

Bumi Mandiri Tower I
Lantai 10 Suite 1008
Jl. Jend.Basuki Rachmat 129-137,
Surabaya 60271
Phone : 031 - 3313 3333
Email : sales-sby@indotara.co.id

Medan Office

Kompleks MMTC WAREHOUSE
Blok C-7
Jl. Pasar V, Pancing,
Medan, Sumut 20371
Phone : 061 - 50 300 600
Email : sales-mdn@indotara.co.id



Shigemitsu

With High Quality and Competitive Price

Shigemitsu goal is to provide customers with “high quality, low cost” products. Let users work more efficiency and safety in any time and any place.

Shigemitsu only provide you with suitable products according to your demands. Our design inspiration is from customers, we'll take “the customer as the center”, seriously listen to the advice of customers, and reflected in the design, such as different option device, mobility, stowed size, all of that reflect Shigemitsu's philosophy “Take the Customer as Center”.

Shigemitsu insist on that : do not use inferior materials for more profit and decline in the quality of the situation is, do not decline the quality to save the cost.

Shigemitsu products widely used in : construction, electrical power industry, ships, municipal engineering, bridge construction, exhibition, advertisement, storage, docks and airports, etc.



Shigemitsu Full Range of Product

Model



- 1 SE-Mini Series
Electric Scissor Lift**
SEM-50MINI
SEM-60MINI
SE-50MINI/ED PLUS
SE-60MINI/ED PLUS

- 5 SD Series
Self-Propelled Rough
Terrain Scissor Lift**
SE-100RT
SE-120RT
SE-140RT
SD-100RT
SD-120RT
SD-140RT
SDW-120RT
SDW-150RT
SDW-180RT

- 11 SE Series
Electric Self-Propelled
Scissor Lift**
SE-65N
SE-80N
SE-80C
SE-100C
SE-60CT
SE-80CT
SE-80W/OR
SE-80W
SE-100W
SE-120W
SE-140W
SE-160W
SE-160W (II)

- 21 SEA Series
Auxiliary Drive
Scissor Lift**
SE-A50S ----- SE-A140H

- SEM Series
Mobile Electric
Scissor Lift**
SE-M50S ----- SE-M140H

- 25 TB Series
Self-Propelled
Telescopic Booms**
TB-200
TB-215J
TB-270
TB-285J
TB-330
TB-350J
TB-390
TB-410J

- 33 AB Series
Self-Propelled
Articulated Booms**
AB-120
AB-140
AB-140J
AB-160
AB-160J
AB-200J
AB-140RT
AB-140J RT
AB-160RT
AB-160J RT
AB-200J RT
AB-260J RT

- 45 TM Series
Truck-Mounted Platform**
TM-1470C
TM-1770C
TM-2110C
TM-2512C
TM-2815C

- 47 SML Series
Super Material Lift**
SML-10
SML-15
SML-20
SML-25

- 49 SAP Series
Aerial Work Platform**
SAP-20
SAP-26
SAP-32
SAP-40

- 51 SLP Series
Sleeve Type Aerial
Work Platform**
SLP-26
SLP-32
SLP-40

- 53 DAP Series
Double Masts Aerial
Work Platform**
DAP-10
DAP-12
DAP-14
DAP-16
DAP-18

- 55 SSAP Series
Self-Propelled Aerial
Work Platform**
SSAP-55
SSAP-65
SSAP-80

- 57 SSAP-J Series
Self-Propelled Aerial
Work Platform**
SSAP-80J
SSAP-100J
SSAP-120J

SEM MINI SERIES
MOBILE ELECTRIC SCISSOR LIFT

Standard Features


- Charge Indicator
- Platform self-locked door
- Level Indicator
- Security overhaul rod
- Emergnecy lowering system
- Emergency stop button
- Dual front wheel brake
- Standard transportation forklift holes
- Non-mark brake tires
- Charge protection system

Option Features

- The AC power connected to the platform
- Buzzer
- Flash light

Model	SEM50MINI	SEM60MINI
Working height max H1	5	6m
Platform height max H2	3m	4m
Lifting Capacity Kg	240	0.55m
Weight Kg	465	100kg
Platform Size, (B*C*A)	1.15 x 0.76 x 1.1	645kg
Skiritng Board Height m	0.15	1.15m
Stowed Size, m (E*F)	1.15 x 0.76	0.76m
Stowed Height m (D)	1.85	1.1m
Hydraulic Tank Capacity L	2	1.7m
Wheelbase m G	1.07	0.15m
Ground Clearance m H	0.06	0.06
Vertical Tilt°	2	2
Lateral Tilt°	1	1
Load Number Max	2	2
Raised Time/ Lowering Time s	28/24	35/18
Power Source	12V/100AH	12V/100AH
Tire Size	Non-Marking Wheels 150mm	Non-Marking Wheels 150mm

SEM Collecting Chart

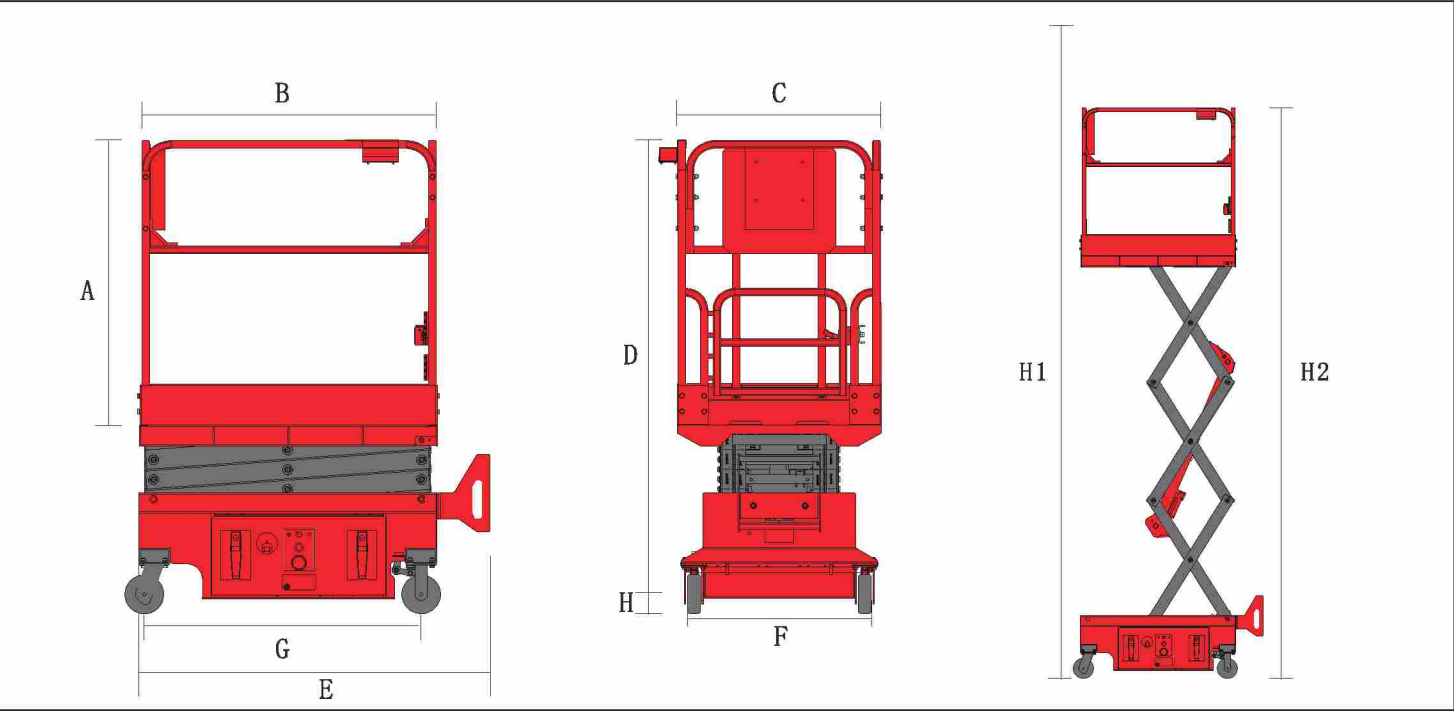

SE MINI/ED PLUS SERIES
ELECTRIC SELF-PROPELLED MINI SCISSOR LIFT

Standard Features


- Proportional control
- Self-lock gate on platform
- Extended platform
- Drivable at full height
- Non marking tire
- 4 x 2WD
- Automatic brake system
- Emergnecy lowering system
- Emergency stop button
- Explosion-proof of the tubing
- Diagnosis system
- Tilt sensor with alarm
- Horn
- Flash light
- Hour meter
- Safety brackets
- Forklift pockets

Option Features

- Overload sensor with alarm
- AC power to platform
- Pothole Guards

Model	SE50MINI/ED Plus	SE60MINI/ED Plus
Working height max (m) H1	5	6.4
Platform height max (m) H2	3	4.4
Outreach Capacity (Kg)	0.55	0.55
Lifting Capacity (Kg)	240	240
Lifting Capacity (Kg) (Extended Platform)	100	100
Weight (Kg)	760	810
Platform Size (L x W x H) m B*C*A	1.28 x 0.76 x 1.1	1.28 x 0.76 x 1.1
The Length of Platform Extended (m)	1.8	1.8
Skirting Board Height (m)	0.17	0.17
Stowed Size (L x W) m E*F	1.49 x 0.76	1.49 x 0.76
Stowed Height (m) D	2.03	2.03
Height of The Machine With Platform Folded (m)	1.5	1.59
Hydraulic Tank Capacity (L)	2	2
Gradeability	25%	25%
Wheelbase (m) G	1.05	1.05
Ground Clearance (m)	0.06	0.06
Inside Rotation Radius (m)	0.35	0.35
Load Number Max	2	2
Raised Time/ Lowering Time (s)	20/17	23/19
Traction Speed (km/h)	3	3
Safe Speed (km/h)	0.8	0.8
Vertical Tilt°	3	3
Lateral Tilt°	2	2
Power Source	24V	24V
Tire Size (mm)	Solid Non-Marking Tires 230	Solid Non-Marking Tires 230

SEM MINI/ED PLUS Collecting Chart

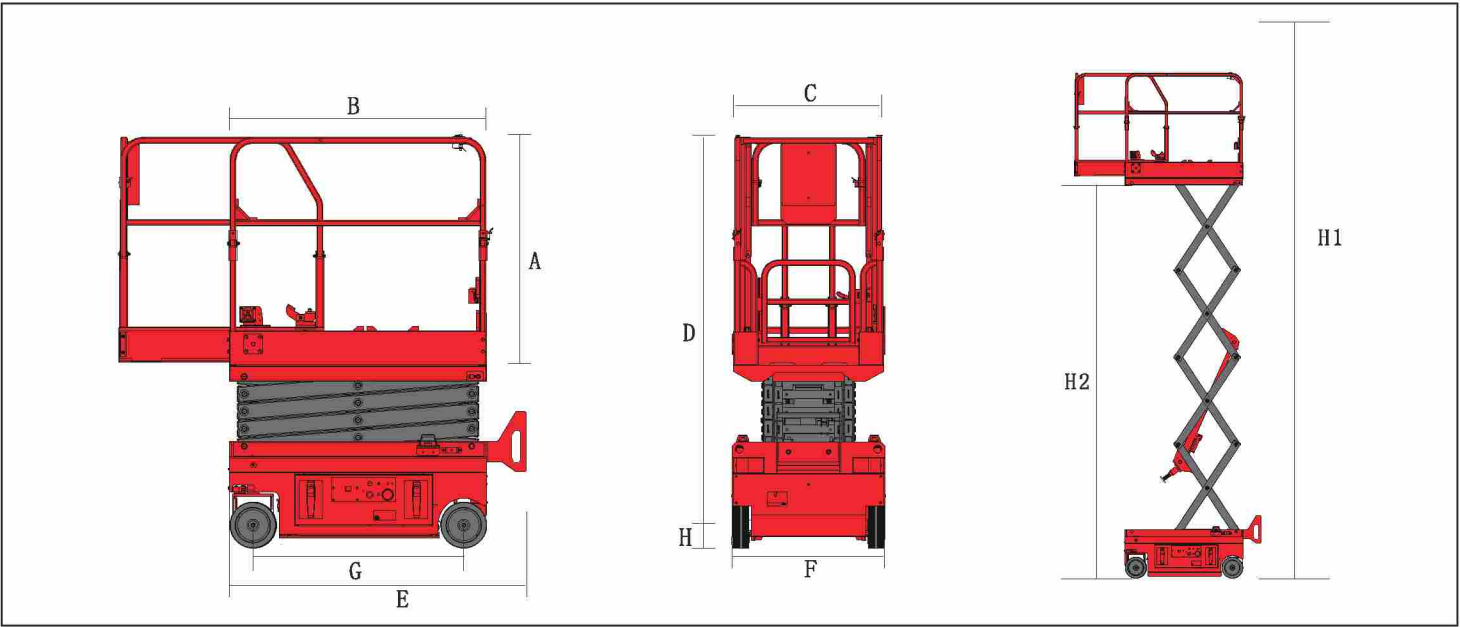

SE SERIES
SELF-PROPELLED ROUGH TERRAIN SCISSOR LIFT



Standard Features

- Foldable guardrail
- Diagnosis system
- AC power to platform
- 4 wheel drive
- Tilt level sensor with an audible alarm
- Lowering alarm
- Horn
- Hour meter
- Emergency pump
- Proportional controls
- Solid rough tire
- Safety brackets
- Explosion-proof of the tubing
- Safety Brackets
- Dual flashing beacon

Options Features

- Automatic leveling hydraulic outriggers
- Air line to platform
- Lithium battery
- Non-mark rough tire
- Overload sensor




Shigemitsu SE-RT series electric rough terrain scissor lift uses high-performance batteries as a strong green kinetic energy. It is designed for rough ground applications. It maintains the driving force and climbing ability of the original SE-RT series. Four wheels driving easily pass uneven and rough ground. At the same time, the SE-RT Series can walk at full height on rough ground, highly improving work efficiency and providing customers with maximum product value. The SE-100RT, SE-120RT and SE-140RT models are all equipped with an extension platform. The maximum platform length could be 4 meters when extended.

Model	SE100RT	SE120RT	SE140RT
Working height max(m) H1	10	12	14
Platform height max(m) H2	8	10	12
Platform height mini(m)(1)	1.22	1.34	1.46
Outreach(m)(2)	1.5	1.5	1.5
Lifting capacity(KG)	567	454	345
Lifting capacity(KG)(Extended platform)	136	136	136
Platform size			
Lateral length(m)(3)	2.5	2.5	2.5
The length of platform extended(m)(4)	4	4	4
Lateral width(m)(5)	1.6	1.6	1.6
Fence height(m) (6)	1.15	1.15	1.15
Skirting board height(m)(7)	0.15	0.15	0.15
Stowed Size			
Stowed length(m)(8)	2.67	2.67	2.67
Stowed width(m)(9)	1.75	1.75	1.75
Stowed height(m)(10)	2.38	2.5	2.6
Height of the machine with platform folded(m)(11)	1.68	1.8	1.98
Wheelbase(m)(12)	1.85	1.85	1.85
Ground clearance(m)(13)	0.17	0.17	0.17
Turn diameter(m)(inside)	1.52	1.52	1.52
Turn diameter(m)(outside)	3.68	3.68	3.68
Load number max	3	3	3
Raised time(s)	30	43	50
Lowering time(s)	40	47	47
Traction speed(km/h)	4	4	4
Safe speed(km/h)	0.8	0.8	0.8
Vertical tilt°	3	3	3
Lateral tilt°	2	2	2
Control	Proportional control		
Drive	Two wheel drive		
WeightKG	3280	3830	4200
Power source	48V 240AH	48V 240AH	48V 240AH
Hydraulic tank capacity L	68	68	68
Gradeability	35%	35%	35%
Tire size/mm(in)	26*121-16.5	26*121-16.5	26*121-16.5


Functional description

1. Electric rough terrain scissor lift has zero emission and no noise characteristics. It also has strong climbing.
2. Super-large bearing capacity of 560kg, stable lifting, safe and reliable.
3. Four-wheel drive has strong power and fast walking speed.
4. With on-board diagnosis system, intelligent fault alarm system and other functions.

SE Working Range

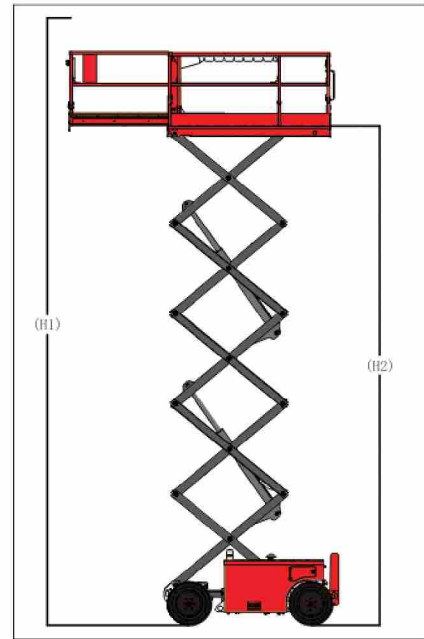

SE Collecting Chart

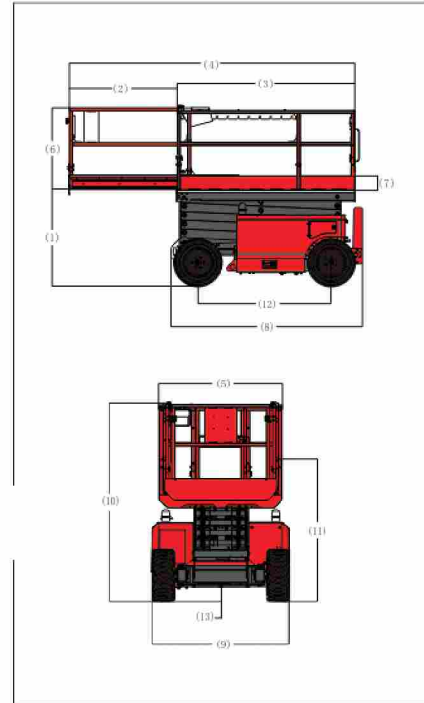

SD SERIES

SELF-PROPELLED ROUGH TERRAIN SCISSOR LIFT




Standard Features

- Foldable guardrail
- Diagnosis system
- AC wiring system
- 4 Wheel Drive
- Tilt level sensor with an audible alarm
- Lowering alarm
- Horn
- Hour meter
- Emergency pump
- Proportional controls
- Solid rough tire
- Safety brackets


Option Features

- Automatic leveling hydraulic outriggers
- Air line to platform
- DC power supply
- Motor cold starting components
- Overload sensor
- Moveable alarm components
- Non-mark rough tire

SD Working Range

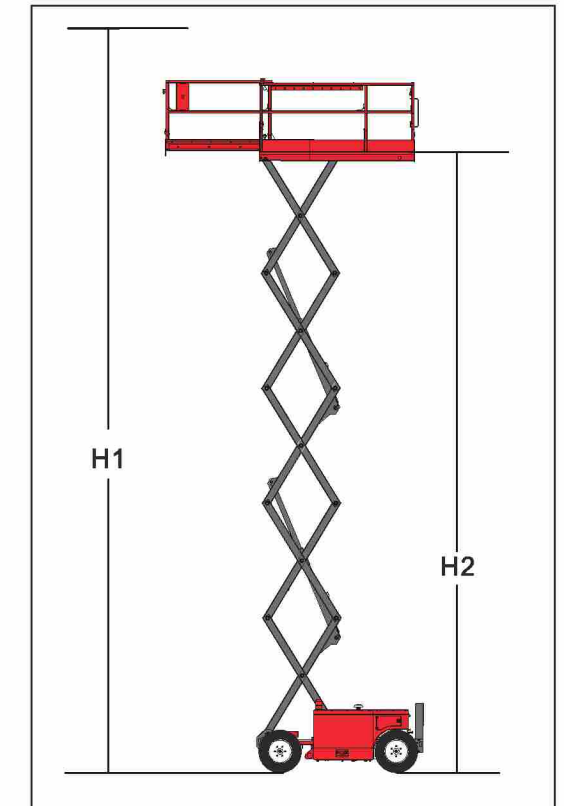

SD Collecting Chart

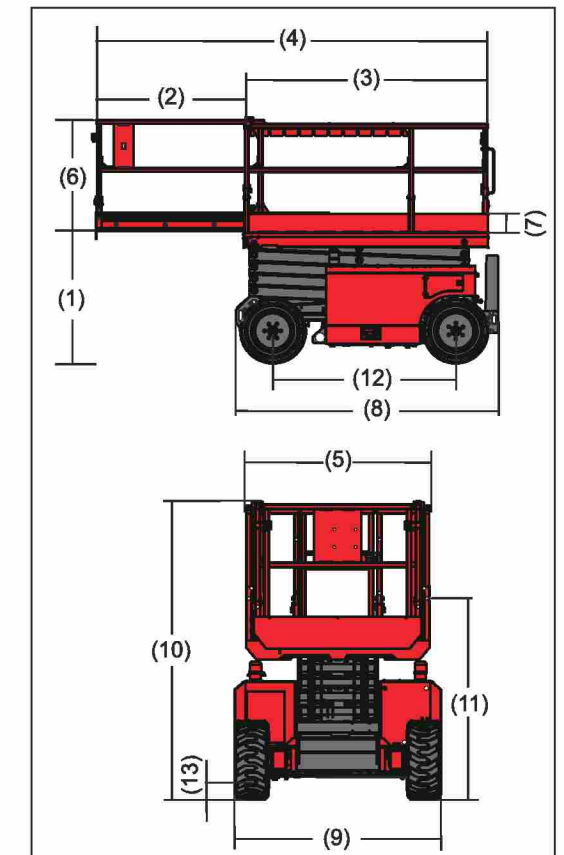

Model	SD100RT	SD120RT	SD140RT
Working height max (m) H1	10	12	14
Platform height max (m) H2	8	10	12
(1) Platform Height min (m) (1)	1.1	1.23	1.36
(2) Outreach (m) (2)	1.5	1.5	1.5
Lifting Capacity (Kg)	567	454	345
Lifting Capacity(Kg) (Extended Platform)	136	136	136
Platform Size			
(3) Lateral Length (m)(3)	2.5	2.5	2.5
(4) Extended Length (m)(4)	4	4	4
(5) Lateral Width (m)(5)	1.6	1.6	1.6
(6) Fence Height (m)(6)	1.15	1.15	1.15
(7) Skirting Board Height (m)(7)	0.15	0.15	0.15
Stowed Size			
(8) Stowed Length (m)(8)	2.67	2.67	2.67
(9) Width (m)(9)	1.75	1.75	1.75
(10) Height (m)(10)	2.38	2.5	2.6
(11) Folded Height (m)(11)	1.68	1.8	1.98
(12) Wheelbase (m)(12)	1.85	1.85	1.85
Ground Clearance (m)(13)	0.17	0.17	0.17
Turn Diameter (m)(Inside)	1.52	1.52	1.52
Load Number Max	3	3	3
Raised Time (s)	30	43	50
Lowering Time (s)	40	47	47
Traction Speed (km/h)	4.0	4.0	4.0
Safe Speed (Km/h)	0.8	0.8	0.8
Vertical Tilt°	3	3	3
Lateral Tilt°	2	2	2
Control	Proportional Control		
Drive	4 Wheels Drive		
Weight (Kg)	3280	3830	4200
Weight (Kg)(With Outriggers)	3680	4280	4600
Power Source	Kubota D1105		
Hydraulic Tank Capacity (L)	68	68	68
Fuel Tank Capacity (L)	57	57	57
Gradeability	35%	35%	30%
*Outrigger Level Ability Max			
Front to Rear	6.6°	6.6°	6.6°
Left to Right	10.6°	10.6°	10.6°
Tire Size (mm)	Solid Tires 26*12-16.5		

- The metric system height is 2 meters higher than platform height, the imperial height is 6 feet than platform height.
- CE/AU market, SD can be used indoor and outdoor, to accomodate Two person.
- Climbing ability is suitable for driving on the slope, he slope classification reference operation manual.
- Weight according to the options and standards vary from country to country.

SDW SERIES
SELF-PROPELLED ROUGH TERRAIN SCISSOR LIFT



Standard Features

- Foldable guardrail
- Diagnosis system
- AC wiring system
- 4 Wheel Drive
- Tilt level sensor with an audible alarm
- Lowering alarm
- Horn
- Hour meter
- Emergency pump
- Proportional controls
- Solid rough tire
- Safety brackets


Option Features

- Automatic leveling hydraulic outriggers
- (SDW120RT/SDW150RT)
- Air line to platform
- DC power supply
- Motor cold starting components
- Overload sensor
- Dual flashing beacon
- Moveable alarm components
- Non-mark rough tire


Model	SDW120RT	SDW150RT	SDW180RT
Working height max (m) H1	12.00	15.00	18.00
Platform height max (m) H2	10.00	13.00	16.00
(1) Platform Height min (m) (1)	1.20	1.20	1.20
(2) Outreach (m) (2)	1.20	1.20	1.20
Lifting Capacity (Kg)	1000 (Single Ext. Platform)	680 (Single Ext. Platform)	680 (Single Ext. Platform)
	900 (Double Ext. Platform)	570 (Double Ext. Platform)	570 (Double Ext. Platform)
Lifting Capacity(Kg) (Extended Platform)	230	230	230
Platform Size			
(3) Lateral Length (m)(3)	3.90	3.90	3.90
(4) Extended Length (m) (Single Extended Platform)	5.10	5.10	5.10
Extended Length (m) (Single Extended Platform)	6.30	6.30	6.30
(5) Lateral Width (m)(5)	2.18	2.18	2.18
(6) Fence Height (m)(6)	1.15	1.15	1.15
(7) Skirting Board Height (m)(7)	0.15	0.15	0.15
Stowed Size			
(8) Stowed Length (m) (Single Extended Platform)	4.47	4.47	---
Stowed Length (m) (Double Extended Platform)	3.97	3.97	---
Stowed Length m (With Outriggers)	4.90	4.90	4.90
Width/ m (9)	2.29	2.29	2.29
Height/ m (10)	2.73	2.9	3.26
(11) Folded Height (m)(11)	2	2.19	2.47
(12) Wheelbase (m)(12)	2.80	2.80	2.80
Ground Clearance (m)(13)	0.32	0.32	0.32
Turn Diameter (m)(Inside)	2.72	2.72	2.72
Turn Diameter (m)(Outside)	5.93	5.93	5.93
Raised Time (s)	60	80	102
Lowering Time (s)	77	90	107
Traction Speed (km/h)	6.4	6.4	6.4
Safe Speed Km/h	1.0	1.0	1.0
Drive Height/ m	All Height	9.6	9.6
Control	Proportional Control		
Drive	4 Wheels Drive		
Weight (Kg)	6282	6950	8700
Power Source	Diesel		
Hydraulic Tank Capacity (L)	115	115	115
Fuel Tank Capacity (L)	115	115	115
Gradeability	45%	45%	40%
*Outrigger Level Ability Max			
Front to Rear	7°	7°	7°
Left to Right	11°	11°	11°
Tire Size (mm)	Solid Tires 33*12-20		

- The metric system height is 2 meters higher than platform height, the imperial height is 6 feet than platform height.
- CE/AU market, SDW can be used in indoor and outdoor, to accomodate three person.
- Climbing ability is suitable for driving on the slope, the slope classification reference operation manual.
- Weight according to the options and standards vary from country to country.

SDW Working Range

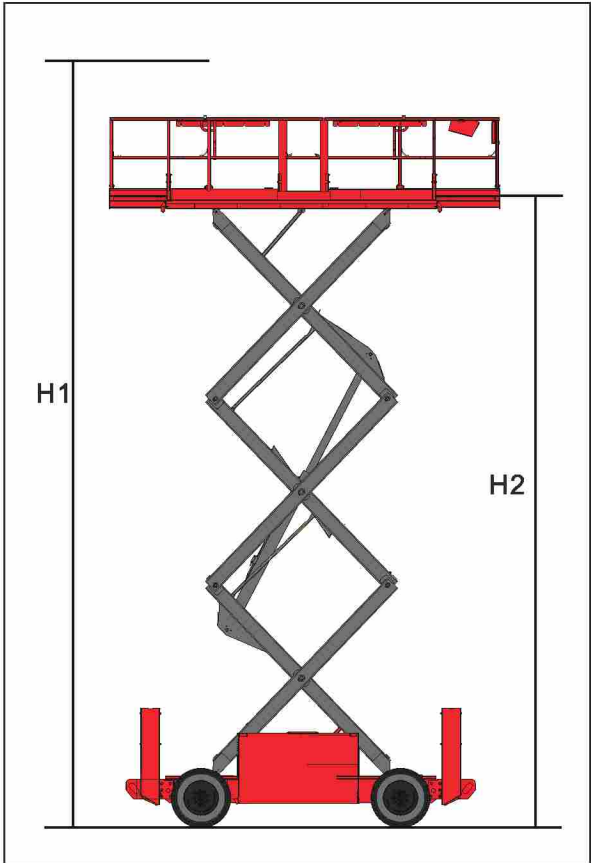

SDW Collecting Chart

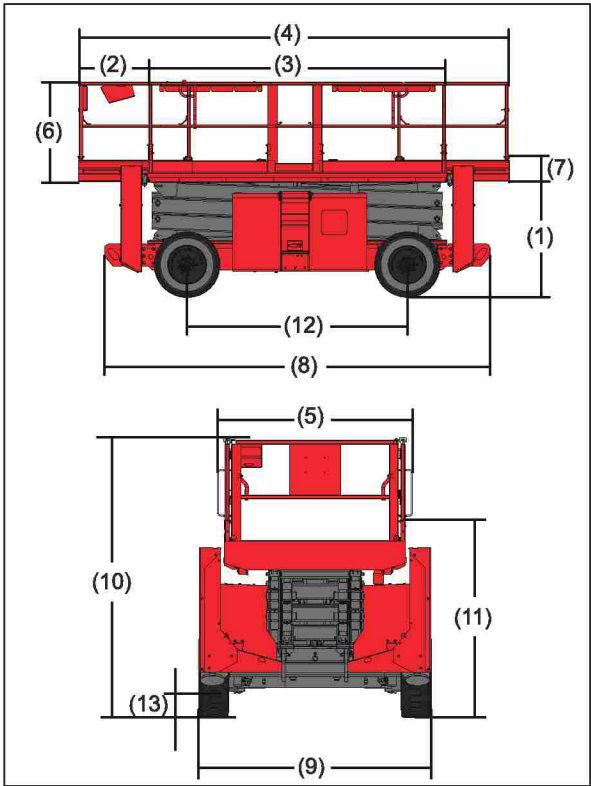

SE-N SERIES
ELECTRIC SELF-PROPELLED SCISSOR LIFT

Standard Features

- Manual emergency lower system
- Platform swing gate
- Extended platform
- Foldable platform
- Multi-disc wet brake
- Manual brake release
- Pothole prtectin
- Non-marking tires
- AC power to platfrm
- Tilt alarm
- Buzzer
- Safety brackets
- Charging indicator
- Forklift pockets
- Diagnosis system
- Maintenance free battery
- Dual flashing beacon

Option Features

- Air line platform
- Power socket to platform
- Platform work light
- Overload sensor
- Hom
- Anti-sollision system
- Top limit protection auto-stop device




Model	SE65N	SE80N
Working height max (m) H1	6.5	7.8
Platform height max (m) H2	4.5	5.8
(2) Outreach (m) (2)	0.9	0.9
Lifting Capacity (Kg)	270	230
Lifting Capacity (Kg) (Extended Platform)	115	115
Weight (Kg) ANSI/CSA Standard	1164	1285
Weight (Kg) CE/AUS Standard	1235	1540
Platform Size (3) x (5) x (6)(L x W x H) m	1.64 x 0.75 x 1.1	
The Length of Platform Extended (m) (4)	2.54	
(7) Skirting Board Height (m)(7)	0.15	
Stowed Size (L x W) (8) x (9) m	1.85 x 0.77	
Stowed Height (m) (10)	2.04 Fixed Platform	2.13 Fixed Platform
Length of the machine with platform extended (m) (13)	2.75	
Height of the machine with platform folded (m) (11)	1.69	1.69
Hydraulic Tank Capacity (L)	15	
Gradeability	30%	30%
Wheelbase (m) (12)	1.32	
Ground Clearance (m)	0.06	
Pothole Protection Board Ground Clearance (m) (Down)	0.02	
Inside Rotation Radius (m)	0	
Outside Turning Radius (m)	1.56	
Load Number Max	2	
Raised Time/ Lowering Time (s)	11/8.5	14/11
Traction Speed (km/h)	3.8	
Safe Speed Km/h	0.7	
Vertical Tilt* ANSI CSA	3	3
Vertical Tilt* CE/ AUS	2	2
Lateral Tilt* ANSI CSA	2	2
Lateral Tilt* CE/ AUS	1.5	1.5
Power Source	4 x 6V ; 225Ah	
Tire Size (mm)	356 x 114 x 254	
Drive Model	Hydraulic Drive / Electric Drive	
Drive Mode	HD/ED	


- The metric system height is 2 meters higher than platform height, the imperial height is 6 feet than platform height
- In the rising mode, the machine is designed to operate on a solid flat surface
- Climbing ability is suitable for driving on the slope, the slope classification reference operation manual
- Weight according to the options and standards vary from country to country

Shigemitsu provides user with both hydraulic drive (HD) and electrical drive (ED) walking modes, in order to meet the demands of different customers

SE-N Working Range

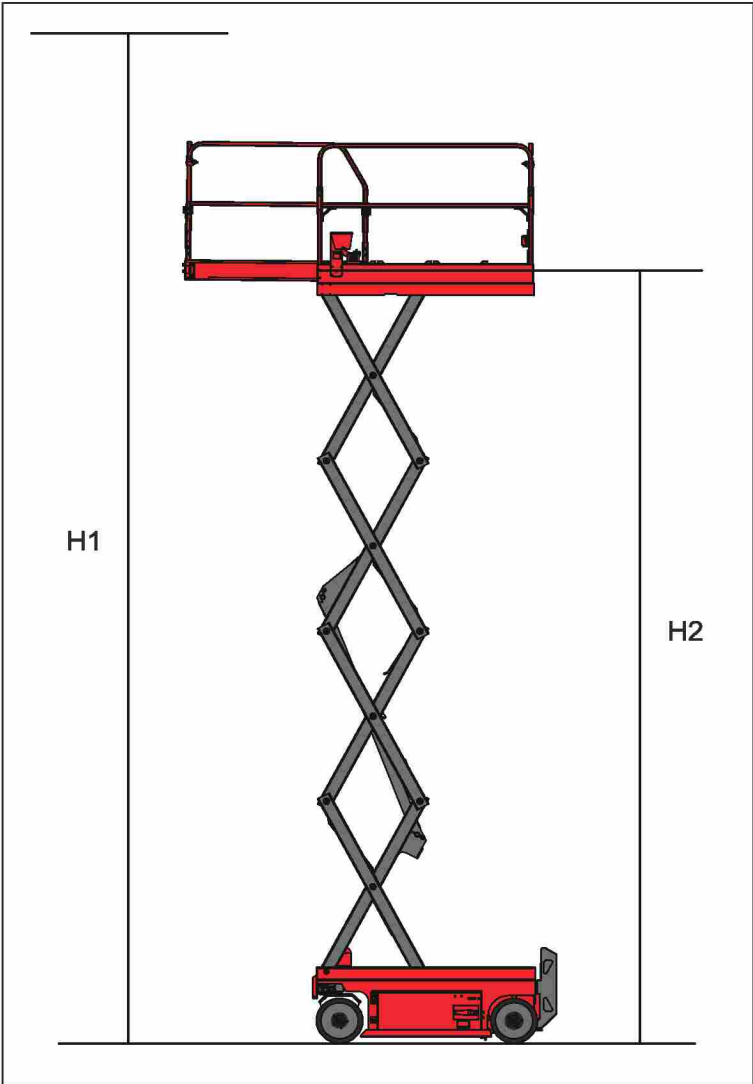

SE-N Collecting Chart

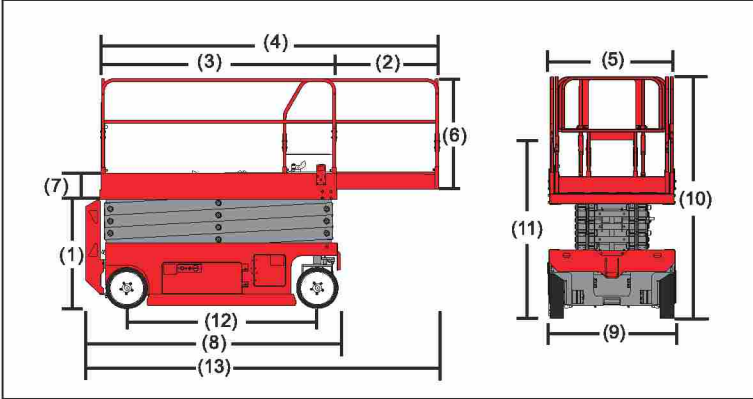

SE-C SERIES
ELECTRIC SELF-PROPELLED SCISSOR LIFT

Standard Features

- SE-C Series working height is form 8m (about 26 feet and 10m About 32 Feet)
- The platform can outreach 1m (SE-C Series)
- Compact design, SE-C series can be easily passed single standard door, the length about platform can be the same with SE-W series, The length can be 3.2m after the extended
- The min. lift capacity is 230kg, max. lift capacity is 350kg
- Proportional controls for lift and drive functions
- Automatic 25 Amp battery charger provides strong power for vehicle
- Safe distance protection when the platform lowering down (CE)
- Manual Emergency platform lowering valve, when there is no power, the machine can be safety lower down
- Emergency stop at both platform and ground controls
- Drive speed interlock limits speed while elevated
- Multiple disc brakes provide smooth deceleration
- When there is no power, manual brake release function can move the machines under the circumstances when there is no other forklift, lifting equipment and so on..
- Pothole guards protect the machine don't tilting down when the machince moved on the raised position
- Non-marking tires make sure there is no damage and no marks on the ground
- AC wiring to platform
- Tilt level sensor with an audible alarm
- Beeper horn
- Hour meter
- Safety brackets
- Battery charge indicator
- Forklift pockets
- Diagnosis system
- Extended platform


Option Features

- Motion alarm
- Platform swing gate
- Air line to platform
- Dual flashing beacon
- Maintenance-free battery
- Horn
- Platform work light
- Foldable platform
- Key-type lock sliding door
- Anti-collision system
- Top limit protection auto-stop device




Model	SE80C	SE100C
Working height max (m) H1	8	10
Platform height max (m) H2	6	8
(2) Outreach (m) (2)	1	1
Lifting Capacity (Kg)	350	230
Lifting Capacity (Kg) (Extended Platform)	120	120
Weight (Kg) ANSI/CSA Standard	1690	1855
Weight (Kg) CE/AUS Standard	1905	2000
Platform Size (3) x (5) x (6)(L x W x H) m	2.25 x 0.8 x 1.1	
The Length of Platform Extended (m) (4)	3.2	
(7) Skirting Board Height (m)(7)	0.15	
Stowed Size (L x W) (8) x (9) m	2.42 x 0.8	
Stowed Height (m) (10)	2.2	2.3
Length of the machine with platform extended (m) (13)	3.4	
Height of the machine with platform folded (m) (11)	1.73	7.86
Hydraulic Tank Capacity (L)	15	
Gradeability	30%	30%
Wheelbase (m) (12)	1.85	
Ground Clearance (m)	0.1	
Pothole Protection Board Ground Clearance (m) (Down)	0.019	
Inside Rotation Radius (m)	0	
Outside Turning Radius (m)	2.12	
Load Number Max	2	
Raised Time/ Lowering Time (s)	27/29	35/17
Traction Speed (km/h)	3.4	
Safe Speed Km/h	0.7	
Vertical Tilt* ANSI CSA	3	3
Vertical Tilt* CE/ AUS	2	2
Lateral Tilt* ANSI CSA	2	2
Lateral Tilt* CE/ AUS	1.5	1.5
Power Source	4 x 6V ; 225Ah	
Tire Size (mm)	356 x 114 x 254	
Drive Model	Hydraulic Drive / Electric Drive	
Drive Mode	HD/ED	

SE-C Working Range

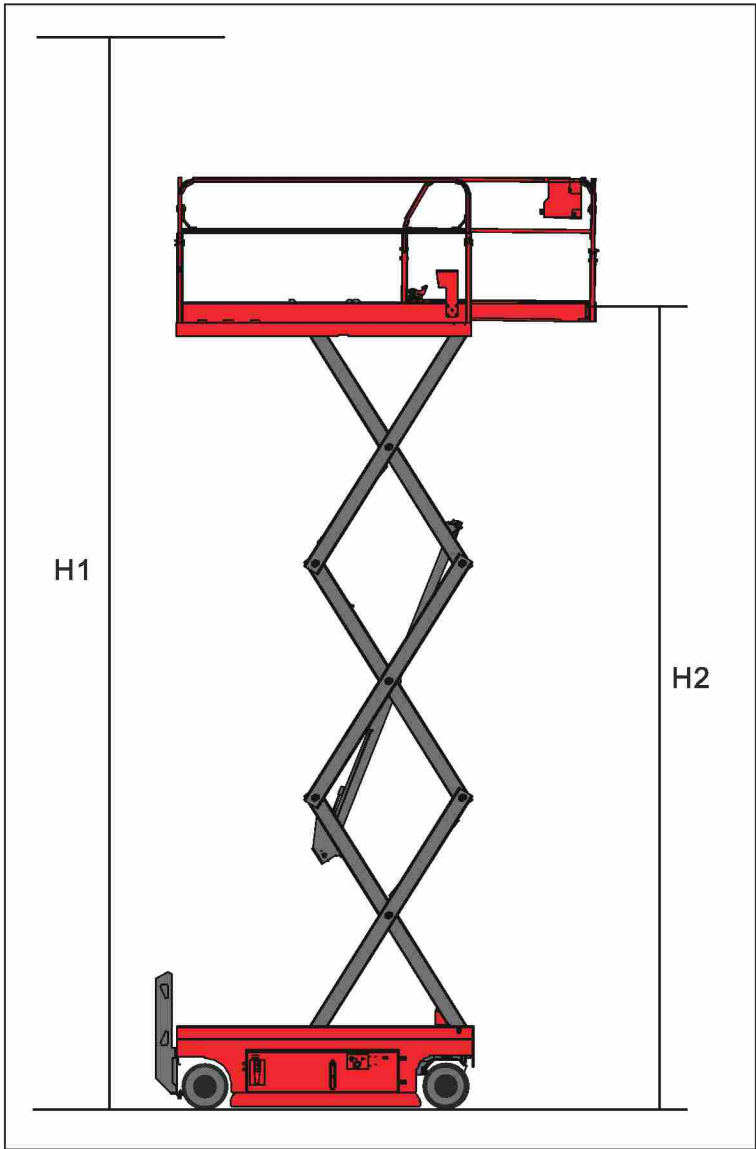

SE-C Collecting Chart

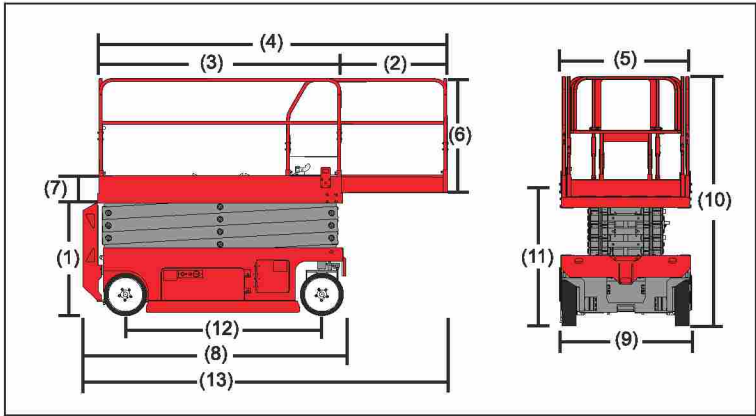

- The metric system height is 2 meters higher than platform height, the imperial height is 6 feet than platform height
- In the rising mode, the machine is designed to operate on a solid flat surface
- Climbing ability is suitable for driving on the slope, the slope classification reference operation manual
- Weight according to the options and standards vary from country to country


Shigemitsu provides user with both hydraulic drive (HD) and electrical drive (ED) walking modes, in order to meet the demands of different customers

SE-CT SERIES
SELF-PROPELLED ROUGH TERRAIN SCISSOR LIFT


The SE-CT series of crawler type scissor lift adopts tracked chassis; the imitation tank structure design; allows aerial work platform to work on the soft ground, breaking the limitation that aerial work platform must be constructed on the hard ground. The seamless track of the Shigemitsu SE-CT Series lift will not cause damage to the ground or leave traces when turning at 0 degrees. The rubber crawler walking system has characteristic of low noise, low vibration and comfortable ride, especially suitable for high speed transfer occasions, achieving full-surface passing performance.

Model	SE-60CT	SE-80CT
Working height max(m) H1	6.8	8.0
Platform height max(m) H2	4.8	6.0
Lifting capacity(kg)	230	230
Weight(kg) KG	1140	1205
Platform sizem B*C*A	1.84*0.9*1.1	1.84*0.9*1.1
Skirting board height(m)	0.15	0.15
Stowed length and width(m) E*F	2.15*1.0	2.15*1.0
Stowed height(m)D	1.75	2.1
Hydraulic tank capacity L	7.0	7.0
Ground clearance(m)	0.13	0.13
Vertical tilt°	2°	2°
Lateral tilt°	3°	3°
Load number max	2	2
Raised/Loweringtime(s)	32/28	32/28
Power source	24V/225Ah	24V/225Ah
Crawler size	200*72 AB-A1	200*72 AB-A1
Gradeability	40%	40%

SE-CT Working Range

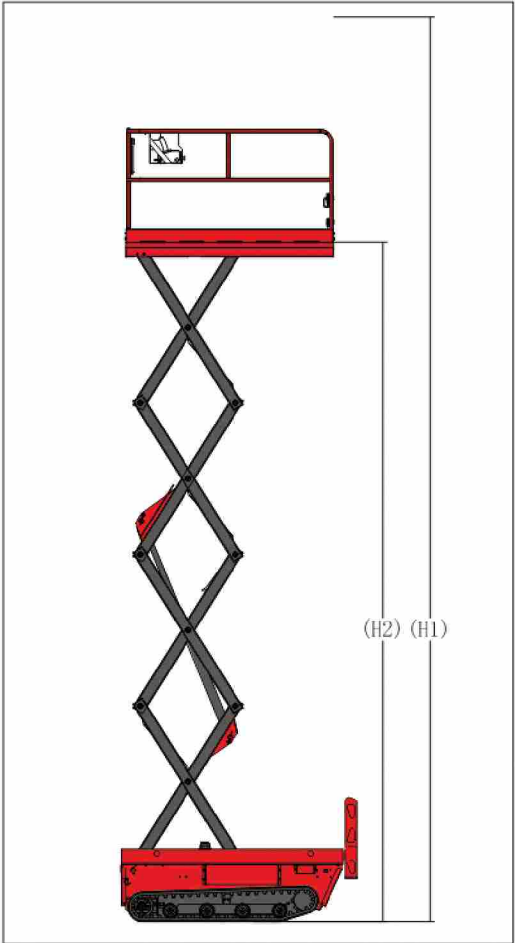

SE-CT Collecting Chart

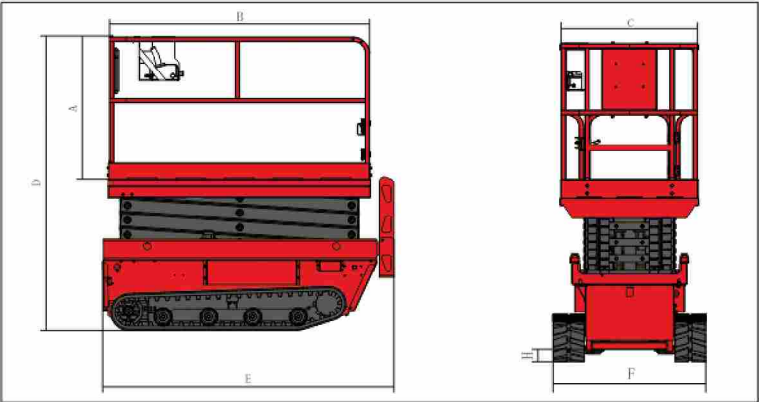

Function Description

Shigemitsu crawler-type electric scissor lift has characteristics of zero emission, no noise, and has powerful climbing function. The carrying capacity could be up to 230Kg. and lifting process is stable. and reliable. Strong drivin force and fast traction speed. With on-board diagnostic system, intelligent fault alarm system and other functions.

Standard Features

- 0.9X1.84M platform
- Tilt alarm system
- Fault diagnosis system
- Explosion-proof of the tubing
- Automatic brake system
- Safety brackets
- 200*72 hard rubber crawler
- Hour meter, power display
- External charging indicator
- AC socket in the platform
- All motion alarms
- Fault code display
- Flash light
- Buzzer
- Proportional control
- Emergency lower
- Manual brake release
- Maintenance free battery

Options Features

- Handheld fault diagnostic device
- Overload sensor

SE-W/OR SERIES
ELECTRIC SELF-PROPELLED SCISSOR LIFT



Standard Features

- Foldable platform
- Diagnosis system
- 4 wheel drive
- Tilt alarm system
- Fault diagnosis system
- Explosion-proof of the tube
- Automatic brake system
- 406*152 non-marking solid rubber tires
- Hour meter
- Proportional control
- Lifting hoists
- Manual emergency lower system
- Safety brackets
- Main power switch
- Automatic leveling hydraulic outriggers
- Maintenance free battery


Options Features

- Air line to the platform
- Platform work light
- Special hydraulic oil
- Top limit protection auto-stop device
- Power socket to the platform
- Overload sensor

The SE80W/OR is converted to a hilly ground design. When the lift can automatically level and lift on the uneven ground of 10 degrees front and rear and 45 degrees left and right. The large carrying capacity can carry 550KG. The platform can be extended to 3.3 meters and the working height can be up to 8 meters. The SE80W/OR has a powerful gradeability, and it can be easily controlled on 35% of the slope. At the same time, SE80W/OR Continues the SE80W's intelligent control system, and the on-board diagnostic system allows customers to control the status of the equipment at the equipment at any time.

Model	SE80W/OR
Working height max(m) H1	8
Platform height max(m) H2	6
Platform height mini(m)(1)	1.02
Outreach(m) (2)	1
Lifting capacity(kg)	550
Lifting capacity(kg)(Extended platform)	120
Platform size(m) (3x4x5)	2.3 x 1.15 x 1.1
The length of platform extended(m)(6)	3.3
Skirting board height(m)(7)	0.17
Stowed length and width(m)(8*9)	2.55*1.2
Stowed height(m)(10)	2.25
Stowed height(m)(11)	1.65
Wheelbase(m)(12)	1.68
Length of the machine with platform extended(m)(13)	3.5
Hydraulic tank capacity L	25
Gradeability	35%
Ground clearance(m)(14)	0.15
Turn diameter(m)(inside)	0
Turn diameter(m)(outside)	2.4
Load number max	2
Raised/Lowering time(s)	32/30
Traction speed(km/h)	3.4
Safe speed(km/h)	0.7
Vertical tilt	3
Lateral tilt°	2
Power source	4*6V; 225Ah
Outrigger level ability max	Left and right10° Front and rear4.5°
Tire size/mm(in)	406*127*318
Weight kg	2270


SE-W/OR Working Range

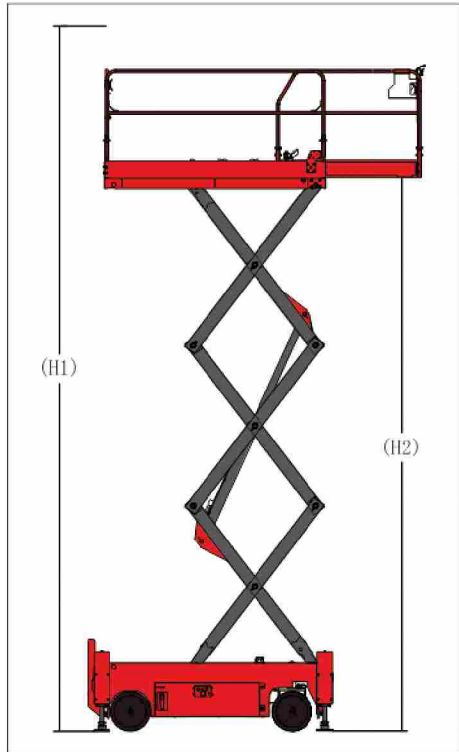

Function Description

1. This equipment is mainly used for indoor and outdoor vertical lifting.
2. The main function is to slide out the extended platform to increase the working area and the ability to rise across.
3. Strong climbing ability, could climb 35% slope,
4. The level ability of the legs is strong, about 10 degrees left and right, 4.5 degrees front and rear.
5. Multi-functional intelligent safety protection system with on-board diagnosis system and intelligent fault alarm system.

SE-W/OR Collecting Chart

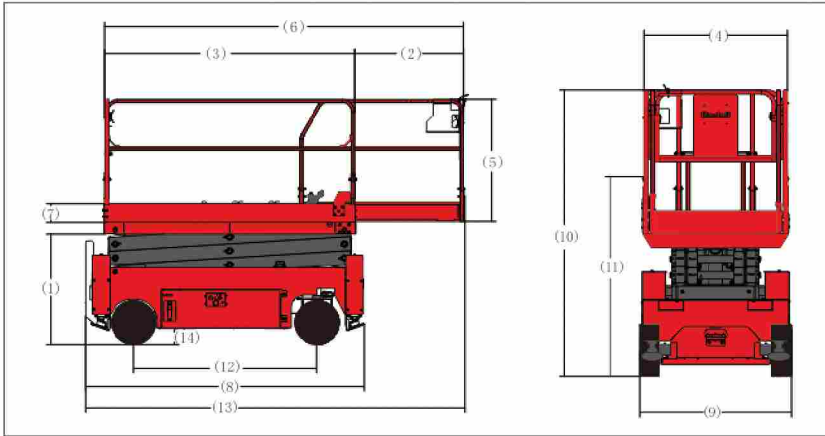

SE-W SERIES

ELECTRIC SELF-PROPELLED SCISSOR LIFT

Standard Features


- SE-W Series working height is form 8m (about 26 feet and 10m About 32 Feet)
- The platform can outreach 1m
- SE-W series can be easily passed double standard door, large lift capacity, min. lift capacity is 350kg, max. lift capacity is 550kg
- Proportional controls for lift and drive functions
- Automatic 25 Amp battery charger provides strong power for vehicle
- Safe distance protection when the platform lowering down (CE)
- Manual Emergency platform lowering valve, when there is no power, the machine can be safety lower down
- Emergency stop at both platform and ground controls
- Drive speed interlock limits speed while elevated
- Multiple disc brakes provide smooth deceleration
- When there is no power, manual brake release function can move the machines under the circumstances when there is no other forklift, lifting equipment and so on...
- Pothole guards protect the machine don't tilting down when the machince moved on the raised position
- Non-marking tires make sure there is no damage and no marks on the ground
- AC wiring to platform
- Tilt level sensor with an audible alarm
- Beeper horn
- Hour meter
- Safety brackets
- Battery charge indicator
- Forklift pockets
- Diagnosis system
- Extended platform

Option Features


- Motion alarm
- Platform swing gate
- Air line to platform
- Dual flashing beacon
- Maintenance-free battery
- Horn
- Platform work light
- Foldable platform
- Key-type lock sliding door
- Anti-collision system
- Top limit protection auto-stop device

Model	SE80W	SE100W	SE120W	SE140W	SE160W	SE160W(II)
Working height max (m) H1	8	10	12	14	16	15.7
Platform height max (m) H2	6	8	10	12	14	13.7
Platform height min (m) (1)	1.06	1.18	1.30	1.42	1.55	1.45
Outreach (m) (2)	1	1	1	1	1	0.9
Lifting capacity (kg)	550	450	320	350	230	227
Lifting capacity (kg) (Extended platform)	120	120	120	120	100	113
Weight (kg) ANSI/CSA Standard	2010	2125	2490	2690	3280	---
CE/AUS Standard	2100	2520	2950	3245	3400	3345
Platform size (3) x (5) x (6) (LxWxH) m	2.3 x 1.15 x 1.1					2.64 x 1.12 x 1.1
The length of platform extended (m) (4)	3.3	3.3	3.3	3.3	3.3	3.54
Skirting board height (m) (7)	0.172	0.172	0.172	0.172	0.172	
Stowed size (8) x (9) (L x W) m	2.42 x 1.2					2.82 x 1.25
Stowed height (m) (10)	2.12	2.25	2.38	2.51	2.64	2.7
Length of the macine with platform (m) (13)	3.5	3.5	3.5	3.5	3.5	3.75
Height of the macine with platform (m) (11)	1.56	1.69	1.82	1.95	1.95	2.08
Hydraulic tank capacity (L)	15	15	25	25	25	20
Gadeability	30%	30%	25%	25%	25%	25%
Wheelbase (m) (12)	1.85					2.21
Ground clearance (m)	0.1					0.15
Fothole protection board ground clearance	0.019					
Inside rotation radius (m)	0					0
Outside turning radius (m)	2.3					2.75
Load number max	2					2
Raised time / Lowering time (e)	32/30	45/30	55/37	61/42	80/46	70/45
Tractin speed (km/h)	3.4					3.5
Safe speed (km/h)	0.7					0.8
Vertical tilt°	ANSI CSA	3			1.5	3
	CE/AUS	3			1.5	3
Lateral tilt°	ANSI CSA	2			1	1.5
	CE/AUS	2			1	1.5
Powe source	4x6V; 225 Ah			4x6V; 225 Ah		4x6V; 225 Ah
Tire size	406 x 127 x 138					406 x 127 x 318
Drive mode	Hydraulic drive or Electric drive					

Working Range

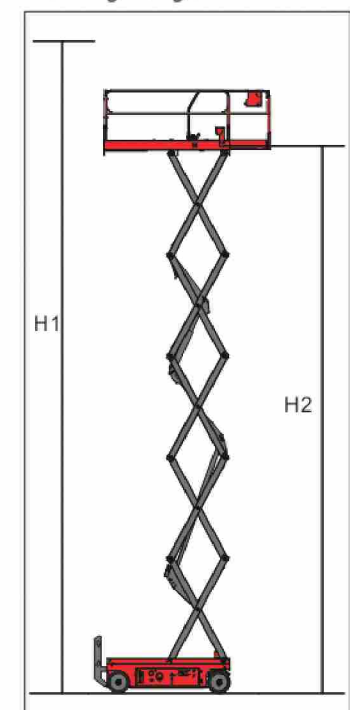

Collecting Chart

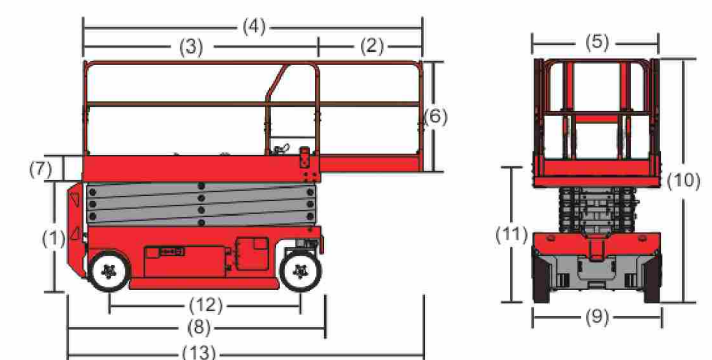

- The metric system height is 2 meters higher than platform height, the imperial height is 6 feet than platform height.
- In the rising mode, the machine is designed t operate on a solid flat surface.
- Climbing ability is suitable for driving on the slope, the slope classification reference operation manual.
- Weight according to the options and standards vary from country to country.

Shigemitsu provides user with both hydraulic drive (HD) and electrical drive (ED) walking modes, in order to meet the demands of different customers.

SE-A/M SERIES
AUXILIARY DRIVE SCISSOR LIFT

SE-A SERIES

Standard Features

- Electric Self-propelled, can operate by one person for drive and work in high position
- Hydraulic line rupture protection device
- Screw support leveling device
- Emergency stop button
- Emergency lower valve when there is no power
- Overload safety protection device
- Rain-proof control box
- Automatically battery charger

Option Features

- Extended Platform (6-12m)

SE-M SERIES

Standard Features

- Electric Self-propelled, can operate by one person for drive and work in high position
- Hydraulic line rupture protection device
- Screw support leveling device
- Emergency stop button
- Emergency lower valve when there is no power
- Overload safety protection device
- Rain-proof control box
- Automatically battery charger

Option Features

- Power : AC220V (6-11m) DC24V/48V
- Manual hydraulic power
- Explosion-proof electric control system
- Extended platform
- Hydraulic system import from Italy
- Rubber solid tires

Table with 7 columns: Model, SE-A50S, SE-A80S, SE-A95S, SE-A110S, SE-A130S, SE-A140S. Rows include Working height max H1, Platform height max H2, Lifting Capacity Kg, Platform Size (mm), Stowed Size (mm) L*W*H, Raised Time (s), Traction Speed (m/s), Power Source, Lifting Motor Power (Kw), Driving Motor Power (Kw), and Weight (Kg).

Table with 6 columns: Model, SE-A160S, SE-A180S, SE-A80H, SE-A110H, SE-A140H. Rows include Working height max H1, Platform height max H2, Lifting Capacity Kg, Platform Size (mm), Stowed Size (mm) L*W*H, Raised Time (s), Traction Speed (m/s), Power Source, Lifting Motor Power (Kw), Driving Motor Power (Kw), and Weight (Kg).

Table with 7 columns: Model, SE-M50S, SE-M80S, SE-M95S, SE-M110S, SE-M130S, SE-M140S. Rows include Working height max H1, Platform height max H2, Lifting Capacity Kg, Platform Size (mm), Stowed Size (mm) L*W*H, Raised Time (s), Power (Kw), Power Voltage, Weight, and Tires.

Table with 6 columns: Model, SE-M160S, SE-M180S, SE-M80H, SE-M110H, SE-M140H. Rows include Working height max H1, Platform height max H2, Lifting Capacity Kg, Platform Size (mm), Stowed Size (mm) L*W*H, Raised Time (s), Power (Kw), Power Voltage, Weight, and Tires.



Standard Features


- Self-leveling platform
- Hydraulic rotation platform
- Hall effect fully propotional controls
- Driving confirm
- AC wiring to platform
- Horn
- Hour meter
- Tilt alarm
- Positive traction drive
- Dual speed motor
- Emergency pump
- CAN intelligent control
- Overload limited

Option Features


- 2.4m platform
- Swing axis
- Platform swing gate
- Platform alternate leverage
- Welder connecting packages
- Welder wire connecting to the platform
- Air line to the platform
- Hydraulic oil cooler
- Hostile environment packages
- Anti-crash air packages
- Tool tray
- Alarm packages
- Platform work lights
- Dual battery
- Traction packages
- AC power source

Model	TB 200	TB 215J
Working height max H1	20	21.5
Working Platform Height Max	18	19.5
Lifting Capacity Max	250 Kg	250 Kg
Total Weight (2wd)	12T	13T
Total Weight (4wd)	12.5T	13.5T
Length-Stowed	8.5 m	8.5 m
Height-Stowed	2.75 m	
Width-Stowed	2.5 m	
Wheelbase	2.5 m	
Drive Speed, Stowed	2.5 m	
Drive Speed, Extended	6.1 Km/h (4WD 4.8 Km/h)	
Gradeability (2wd/4wd)	30% / 45%	
Tire	365/14D-20;rubber solid tire	
Power Producer	Diesel Motor	
Control Mode	Electro Hydraulic Propotional Control	
Turnable Rotation	360°	
Platform Rotation	180°	
Jib Rotation	130° (+75° / 55°)	
Platform Size	1.8 m x 0.76 m x 1.1 m (L x W x H)	
Driving Wheels Number	2/4	
Steering Wheels Number	2/4	
System Voltage	DC24V	


TB200 Collecting Chart

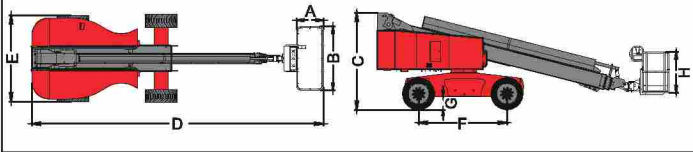


TB215J Collecting Chart



TB200 Working Range

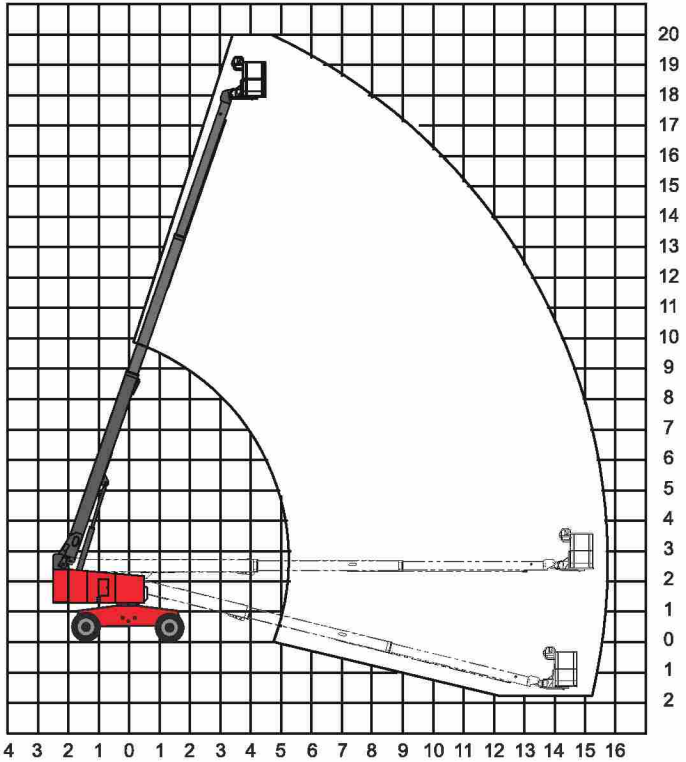

TB215J Working Range

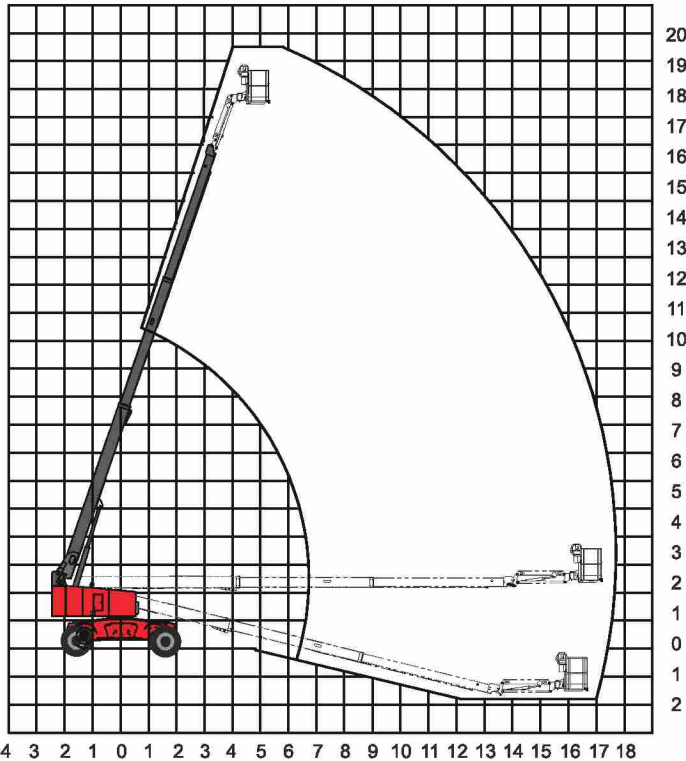



Standard Features


- Self-leveling platform
- Hydraulic rotation platform
- Hall effect fully proportional controls
- Driving confirm
- AC wiring to platform
- Horn
- Hour meter
- Tilt alarm
- Positive traction drive
- Dual speed motor
- Emergency pump
- CAN intelligent control
- Overload limited

Option Features


- 2.4m platform
- Swing axis
- Platform swing gate
- Platform alternate leverage
- Welder connecting packages
- Welder wire connecting to the platform
- Air line to the platform
- Hydraulic oil cooler
- Hostile environment packages
- Anti-crash air packages
- Tool tray
- Alarm packages
- Platform work lights
- Dual battery
- Traction packages
- AC power source

Model	TB 200	TB 215J
Working height max H1	20	21.5
Working Platform Height Max	18	19.5
Lifting Capacity Max	250 Kg	250 Kg
Total Weight (2wd)	12T	13T
Total Weight (4wd)	12.5T	13.5T
Length-Stowed	8.5 m	8.5 m
Height-Stowed	2.75 m	
Width-Stowed	2.5 m	
Wheelbase	2.5 m	
Drive Speed, Stowed	2.5 m	
Drive Speed, Extended	6.1 Km/h (4WD 4.8 Km/h)	
Gradeability (2wd/4wd)	30% / 45%	
Tire	365/14D-20;rubber solid tire	
Power Producer	Diesel Motor	
Control Mode	Electro Hydraulic Propotional Control	
Turnable Rotation	360°	
Platform Rotation	180°	
Jib Rotation	130° (+75° / 55°)	
Platform Size	1.8 m x 0.76 m x 1.1 m (L x W x H)	
Driving Wheels Number	2/4	
Steering Wheels Number	2/4	
System Voltage	DC24V	


TB200 Collecting Chart




TB215J Collecting Chart



TB200 Working Range

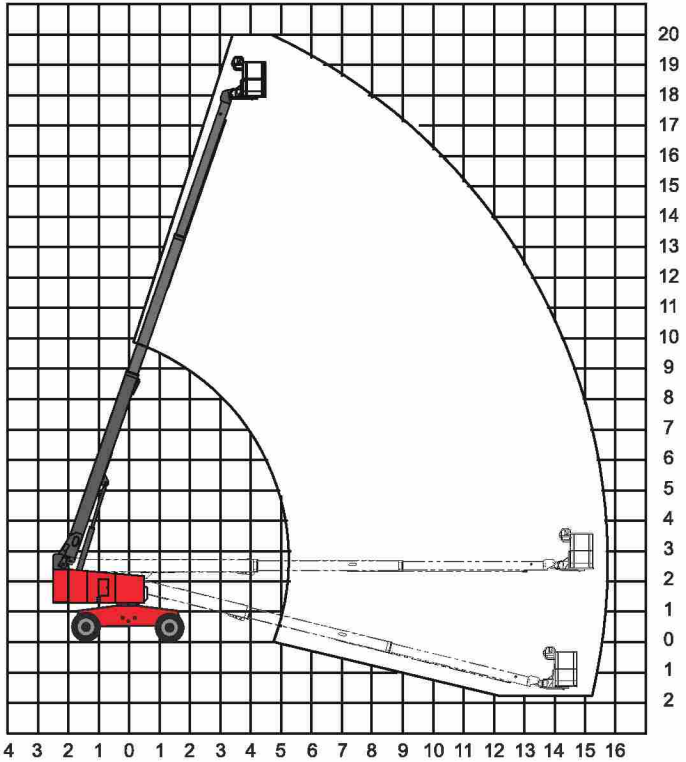

TB215J Working Range

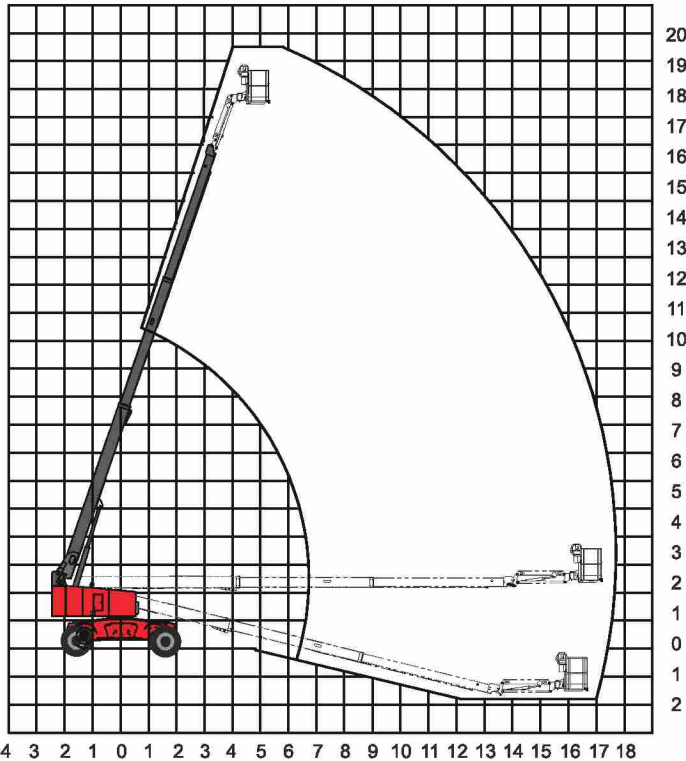

Standard Features


- Self-leveling platform
- Hydraulic rotation platform
- Hall effect fully proportional controls
- Driving confirm
- AC wiring to platform
- Horn
- Hour meter
- Tilt alarm
- Positive traction drive
- Dual speed motor
- Emergency pump
- CAN intelligent control
- Overload limited

Option Features


- 2.4m platform
- Swing axis
- Platform swing gate
- Platform alternate leverage
- Welder connecting packages
- Welder wire connecting to the platform
- Air line to the platform
- Hydraulic oil cooler
- Hostile environment packages
- Anti-crash air packages
- Tool tray
- Alarm packages
- Platform work lights
- Dual battery
- Traction packages
- AC power source

Model	TB 270	TB 285J
Working height max H1	27 m	28.5 m
Working Platform Height Max	25 m	26.5 m
Lifting Capacity Max	250 Kg	250 Kg
Total Weight (2wd)	13.86 T	15.5 T
Total Weight (4wd)	14.5 T	13.5T
Length-Stowed	11.8 m	12.5 m
Height-Stowed	2.75 m	
Width-Stowed	2.5 m	
Wheelbase	2.8 m	
Drive Speed, Stowed	5.6 Km/h	
Drive Speed, Extended	1.1 Km/h	
Gradeability (2wd/4wd)	30% / 45%	
Tire	365/ 14D-20 ; Rubber Solid Tire	
Power Producer	Diesel Motor	
Control Mode	Electro Hydraulic Propotional Control	
Turnable Rotation	360°	
Platform Rotation	180°	
Jib Rotation	130° (+75° / 55°)	
Platform Size	1.8 m x 0.76 m x 1.1 m (L x W x H)	
Driving Wheels Number	2/4	
Steering Wheels Number	2/4	
System Voltage	DC24V	


TB270 Collecting Chart

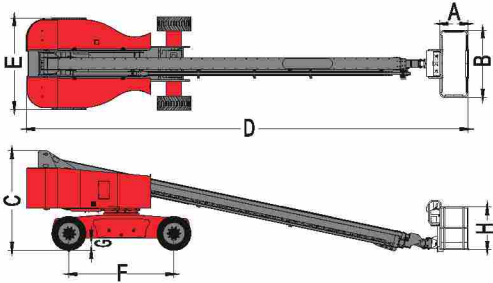


TB275 Collecting Chart

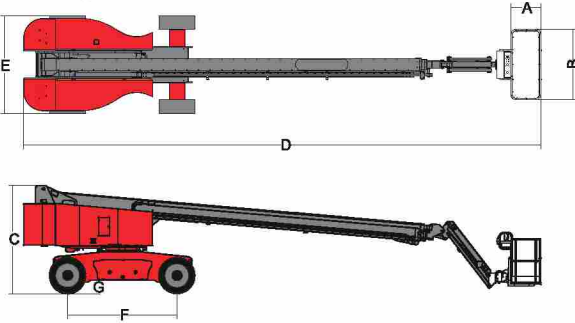

TB270 Working Range

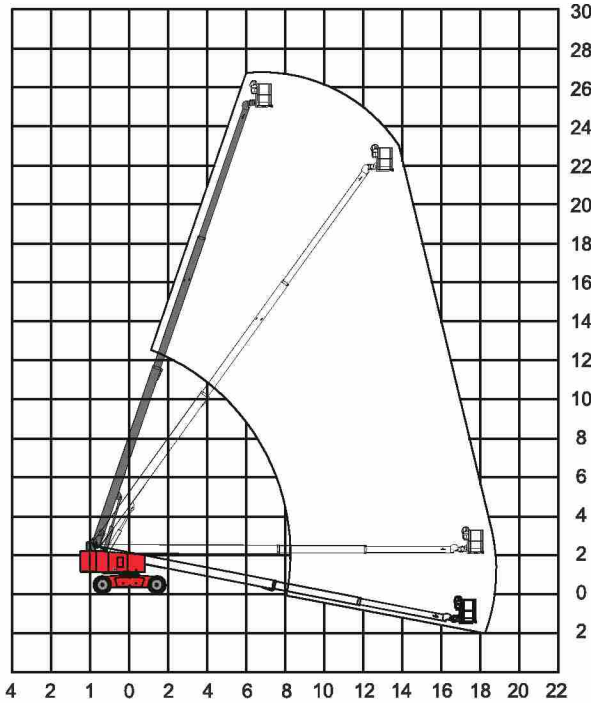

TB285J Working Range

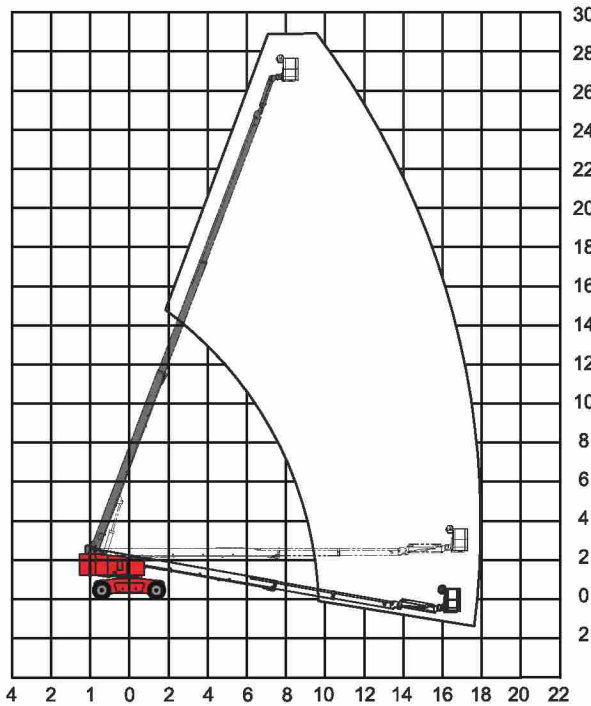

TB SERIES
SELF-PROPELLED TELESCOPIC BOOMS

Standard Features


- Self-leveling platform
- Hydraulic rotation platform
- Hall effect fully proportional controls
- Driving confirm
- AC wiring to platform
- Horn
- Hour meter
- Tilt alarm
- Positive traction drive
- Dual speed motor
- Emergency pump
- CAN intelligent control
- Overload limited

Option Features


- 2.4m platform
- Swing axis
- Platform swing gate
- Platform alternate leverage
- Welder connecting packages
- Welder wire connecting to the platform
- Air line to the platform
- Hydraulic oil cooler
- Hostile environment packages
- Anti-crash air packages
- Tool tray
- Alarm packages
- Platform work lights
- Dual battery
- Traction packages
- AC power source

Model	TB 330	TB 350J
Working height max H1	33 m	35 m
Working Platform Height Max	31 m	33 m
Lifting Capacity Max	340 Kg	340 Kg
Total Weight (2wd)	18.5 T	19.5 T
Total Weight (4wd)	20.18 T	21.18 T
Length-Stowed	13.2 m	13.5 m
Height-Stowed	3.1 m	
Width-Stowed	2.5 m (3.35m)	
Wheelbase	3.65 m	
Drive Speed, Stowed	4.5 Km/h	
Drive Speed, Extended	0.55 Km/h	
Gradeability (2wd/4wd)	25% / 40%	
Tire	385/64-24	
Power Producer	Diesel Motor	
Control Mode	Electro Hydraulic Proportional Control	
Turnable Rotation	360°	
Platform Rotation	180°	
Jib Rotation	130° (+75° / 55°)	
Platform Size	1.8 m x 0.76 m x 1.1 m (L x W x H)	
Driving Wheels Number	2/4	
Steering Wheels Number	2/4	
System Voltage	DC24V	


TB330 Working Range

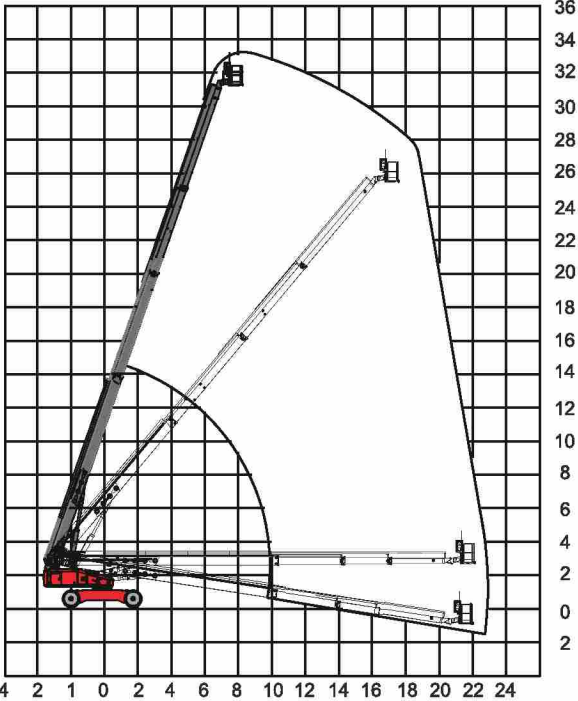


TB350J Working Range

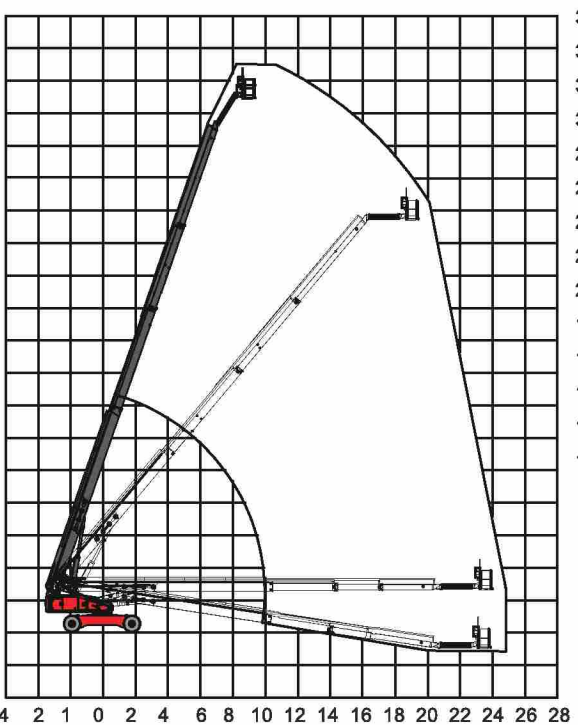

TB330 Collecting Chart

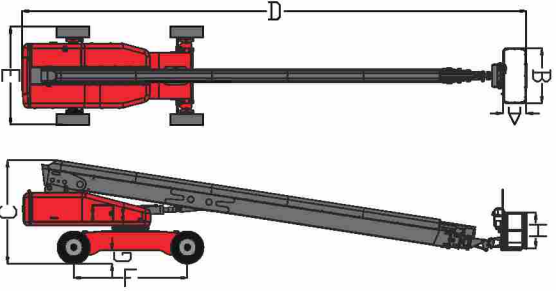

TB330J Collecting Chart

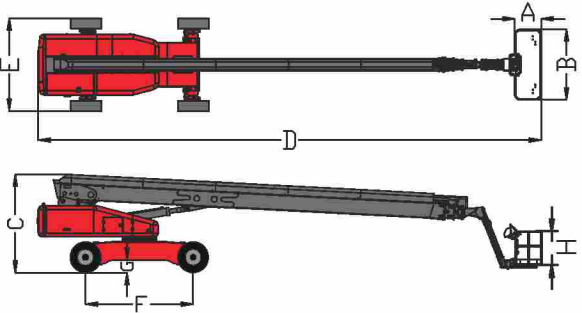

Standard Features


- Self-leveling platform
- Hydraulic rotation platform
- Hall effect fully proportional controls
- Driving confirm
- AC wiring to platform
- Horn
- Hour meter
- Tilt alarm
- Positive traction drive
- Dual speed motor
- Emergency pump
- CAN intelligent control
- Overload limited

Option Features


- 2.4m platform
- Swing axis
- Platform swing gate
- Platform alternate leverage
- Welder connecting packages
- Welder wire connecting to the platform
- Air line to the platform
- Hydraulic oil cooler
- Hostile environment packages
- Anti-crash air packages
- Tool tray
- Alarm packages
- Platform work lights
- Dual battery
- Traction packages
- AC power source

Model	TB 390	TB 410J
Working height max H1	39 m	41 m
Working Platform Height Max	37 m	39 m
Lifting Capacity Max	340 Kg	340 Kg
Total Weight (2wd)	25.4 T	26.4 T
Total Weight (4wd)	25.5 T	26.5 T
Length-Stowed	13.5 m	16.6 m
Height-Stowed	3.1 m	
Width-Stowed	2.5 m (3.35m)	
Wheelbase	3.65 m	
Drive Speed, Stowed	4.5 Km/h	
Drive Speed, Extended	0.55 Km/h	
Gradeability (2wd/4wd)	25% / 40%	
Tire	445/65D-22.5; rubber solid tire	
Power Producer	Diesel Motor	
Control Mode	Electro Hydraulic Proportional Control	
Turnable Rotation	360°	
Platform Rotation	180°	
Jib Rotation	130° (+75° / 55°)	
Platform Size	1.8 m x 0.76 m x 1.1 m (L x W x H)	
Driving Wheels Number	2/4	
Steering Wheels Number	2/4	
System Voltage	DC24V	


TB390 Collecting Chart

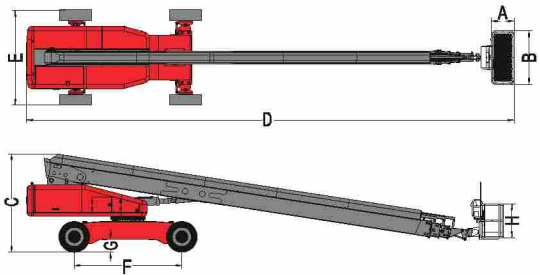


TB410J Collecting Chart

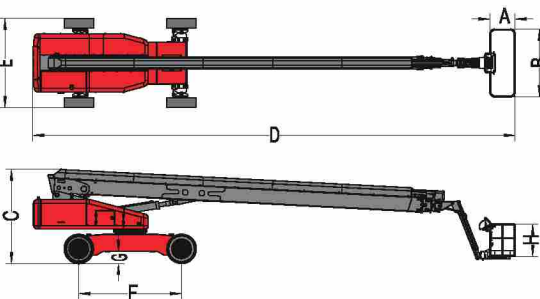

TB390 Working Range

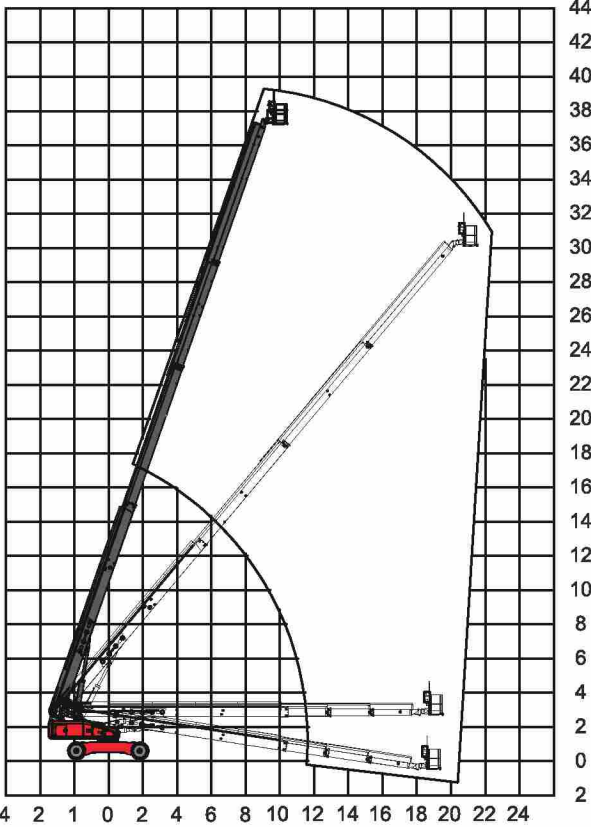

TB410J Working Range

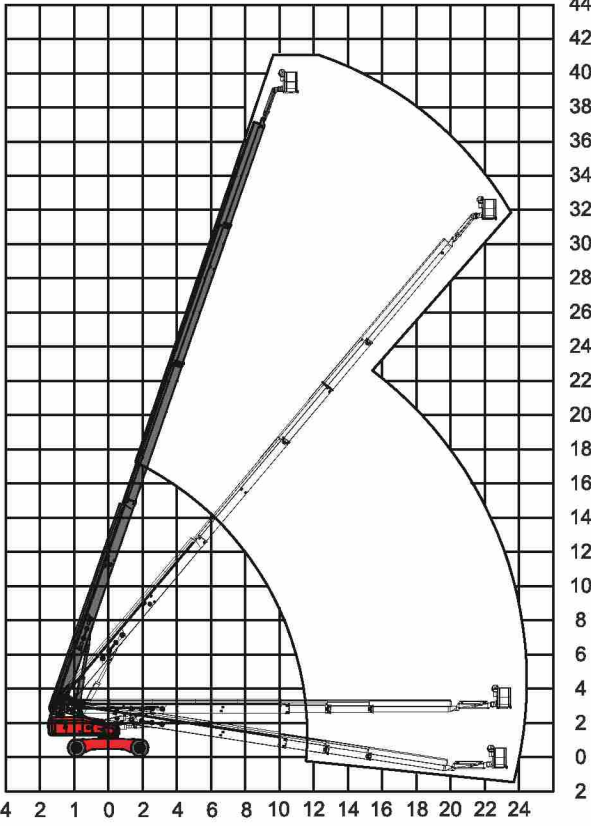



Standard Features

- Self-leveling platform
- Hydraulic rotation platform
- Hall effect fully proportional controls
- Driving confirm
- AC wiring to platform
- Horn
- Hour meter
- Tilt alarm
- Positive traction drive
- Dual speed motor
- Emergency pump
- CAN intelligent control
- Overload limited


Option Features

- 2.4m platform
- Platform swing gate
- Platform alternate leverage
- Welder connecting packages
- Welder wire connecting to the platform
- Air line to the platform
- Hydraulic oil cooler
- Hostile environment packages
- Anti-crash air packages
- Tool tray
- Alarm packages
- Platform work lights


Model	AB120	AB140/ AB140J
Lift Capacity Max	200 Kg	230 Kg
Working Height Max	12.00m	14.00 m
Working Platform Height Max	10.00m	12.00 m
Working Platform Outreach Max	6m	6.88 m
Across Height Max	4.2m	6.33 m
Turntable Rotation	360° Discontinously	
Drive Speed, Stowed	4.0km/h	3.7 Km/h
Drive Speed, Extended	1.0km/h	1.0 Km/h
Platform Rotation	-----	180°
Boom Swing	-----	0/140°
Platform Size A*B*H	1.16m x 0.65m x 1.1m	1.5m x 1.76m x 1.1m
Leveling Platform	Hydraulic leveling	
Drive Wheels Number	2	2
Steering Wheel Number	2	2
Drive	DC 48V	DC 48V
System Voltage	DC 12V	DC12V
Tire Size	22 x 7 x 16	600 x 190
Controls	Electrical Hydraulic Propotional Control	
Turning Radius- (Outside)	4.2 m	3.5 m
Turning Radius- (Inside)	1.9 m	2.3 m
Turntable Tailswing	0	0
Maximum Lateral Force	400N	400N
Tilt Angle Max	3°	3°
Wind Speed Allowed Max	12.5m/s	12.5m/s
Gradeability	25%	30%
Height-Stowed (C)	1.96m	2.00 m
Length-Stowed (E)	4.2m	5.28 m/ 5.57m
Width-Stowed (D)	1.5m	1.75 m
Wheelbase (F)	1.96m	2.00 m
Ground Clearance (G)	0.18m	0.14 m
Hydraulic Tank Capacity	32L	35L
Total Weight	4.0T	5.6T/ 5.8T

- The metric system height is 2 meters higher than platform height, the imperial height the imperial height is 6 feet than platform height.
- In the rising mode, the machine is designed to operate on a solid flat surface.
- Climbing ability is suitable for driving on the slope, the classificatin reference operation manual.
- Weight according to the optins and standards vary from country to country.


AB120 Working Range

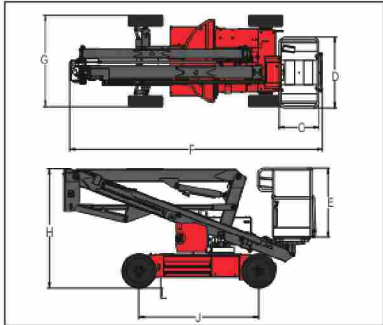


AB140/J Working Range

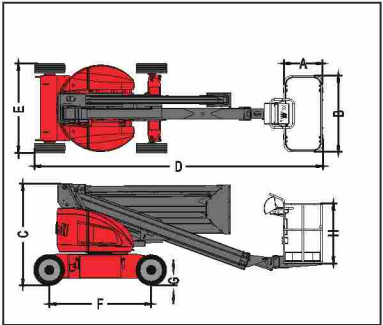

AB120 Working Range

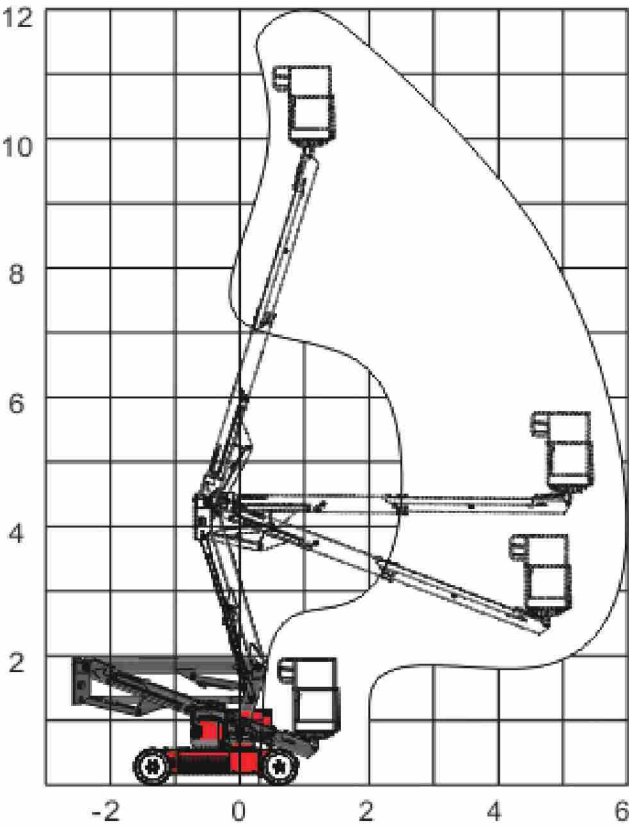

AB140/J Working Range

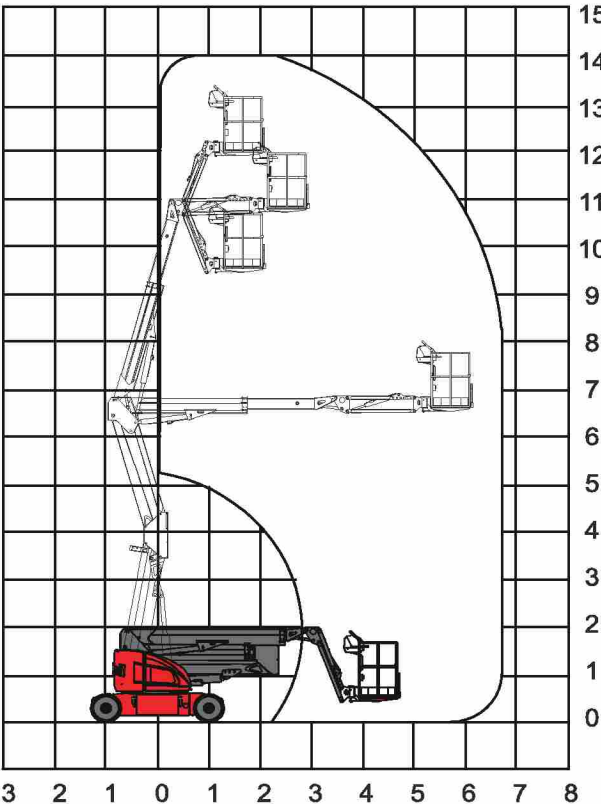

Standard Features


- Self-leveling platform
- Hydraulic rotation platform
- Hall effect fully proportional controls
- Driving confirm
- AC wiring to platform
- Horn
- Hour meter
- Tilt alarm
- Positive traction drive
- Dual speed motor
- Emergency pump
- CAN intelligent control
- Overload limited

Option Features


- 2.4m platform
- Swing axis
- Platform swing gate
- Platform alternate leverage
- Welder connecting packages
- Welder wire connecting to the platform
- Air line to the platform
- Hydraulic oil cooler
- Hostile environment packages
- Anti-crash air packages
- Tool tray
- Alarm packages
- Platform work lights

Model	AB160/ AB160J
Lift Capacity Max	230 Kg
Working Height Max	16.00 m
Working Platform Height Max	14.00 m
Working Platform Outreach Max	8.0 m
Across Height Max	7.7 m
Turntable Rotation	360 Discrete
Drive Speed, Stowed	4.8 Km/h
Drive Speed, Extended	1.0 Km/h
Platform Rotation	180°
Boom Swing	0/140°
Platform Size A*B*H	1.5m x 0.76m x 1.1m
Leveling Platform	Hydraulic Level
Drive Wheels Number	2
Steering Wheel Number	2
Drive	DC 48V
System Voltage	DC12V
Tire Size	33*12-20
Controls	Electrical Proportional Control
Turning Radius- (Outside)	3.40 m
Turning Radius- (Inside)	1.1 m
Turntable Tailswing	0
Maximum Lateral Force	400N
Tilt Angle Max	3°
Wind Speed Allowed Max	12.5m/s
Gradeability	30%
Height-Stowed (C)	2.00 m
Length-Stowed (E)	5.70 m/ 6.50 m
Width-Stowed (D)	1.75 m
Wheelbase (F)	2.00 m
Ground Clearance (G)	0.14 m
Hydraulic Tank Capacity	35/50L
Total Weight	6.49T/ 6.5T


AB160 Working Range

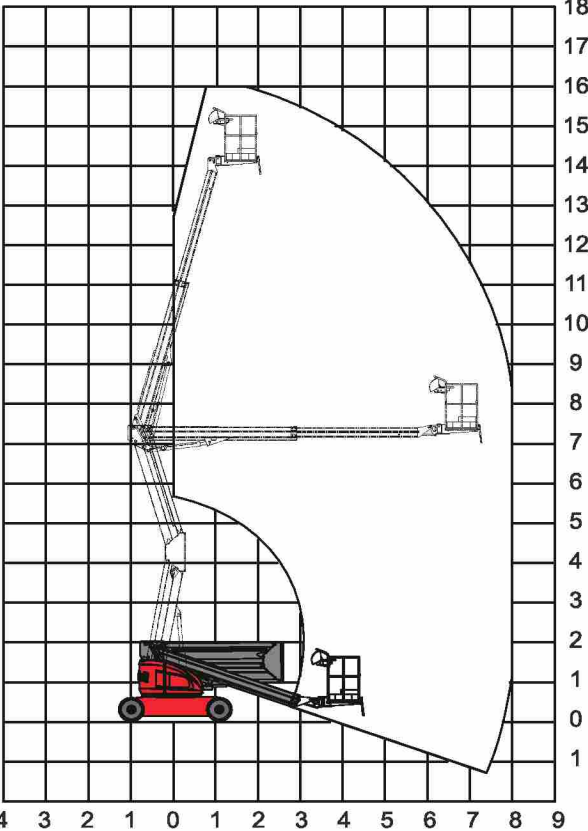


AB160J Working Range

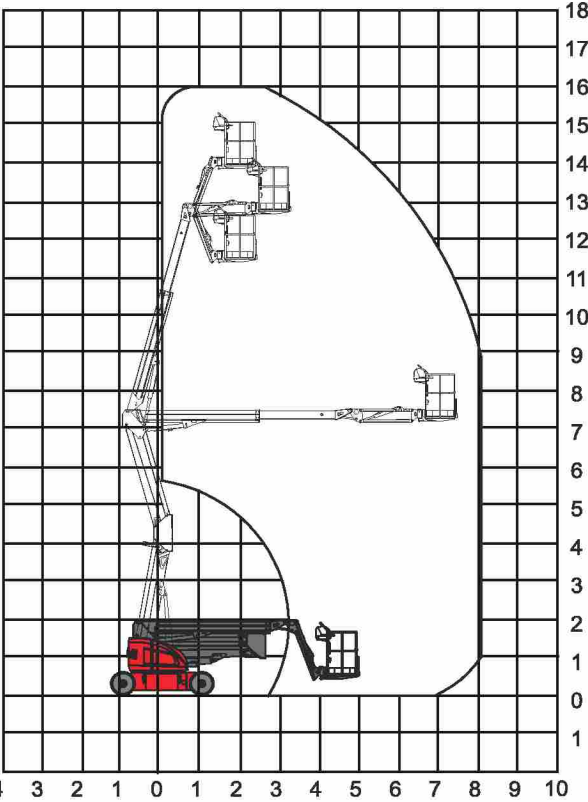

AB160 Working Range

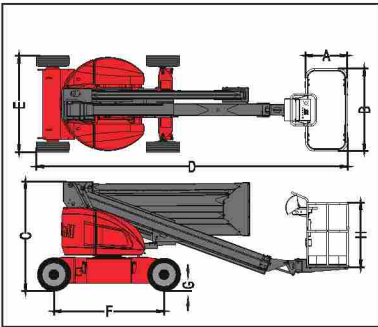

AB160J Working Range

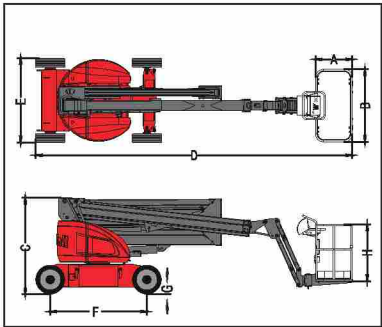

- The metric system height is 2 meters higher than platform height, the imperial height is 6 feet than platform height.
- In the risingmode, the machine is designed to operate on a solid flat surface.
- Climbing ability is suitable for driving o he slope, the slope classification reference operation manual.
- Weight according to the options and standards vary from country to country.

Standard Features

- Self-leveling platform
- Hydraulic rotation platform
- Hall effect fully propotional controls
- Driving confirm
- AC wiring to platform
- Horn
- Hour meter
- Tilt alarm
- Positive traction drive
- Dual speed motor
- Emergency pump
- CAN intelligent control
- Overload limited


Option Features

- 2.4m platform
- Swing axis
- Platform swing gate
- Platform alternate leverage
- Welder connecting packages
- Welder wire connecting to the platform
- Air line to the platform
- Hydraulic oil cooler
- Hostile environment packages
- Anti-crash air packages
- Tool tray
- Alarm packages
- Platform work lights




Model	AB200J
Lift Capacity Max	230 Kg
Working Height Max	20.00 m
Working Platform Height Max	18.00 m
Working Platform Outreach Max	12.00 m
Across Height Max	8.00 m
Turntable Rotation	360° Discrete
Drive Speed, Stowed	4.0 Km/h
Drive Speed, Extended	1.0 Km/h
Platform Rotation	180°
Boom Swing	0/140°
Platform Size A*B*H	1.8m x 0.76m x 1.1m
Leveling Platform	Hydraulic Level
Drive Wheels Number	2
Steering Wheel Number	2
Drive	DC 48V
System Voltage	DC12V
Tire Size	355/55D-625
Controls	Electrical Proportional Control
Turning Radius- (Outside)	5.50 m
Turning Radius- (Inside)	2.80 m
Turntable Tailswing	0
Maximum Lateral Force	400N
Tilt Angle Max	3°
Wind Speed Allowed Max	12.5m/s
Gradeability	25%
Height-Stowed (C)	2.60 m
Length-Stowed (D)	8.00 m/ 8.80 m
Width-Stowed (E)	2.50 m
Wheelbase (F)	2.85 m
Ground Clearance (G)	0.30 m
Hydraulic Tank Capacity	110L
Total Weight	9.5T

AB200J Working Range

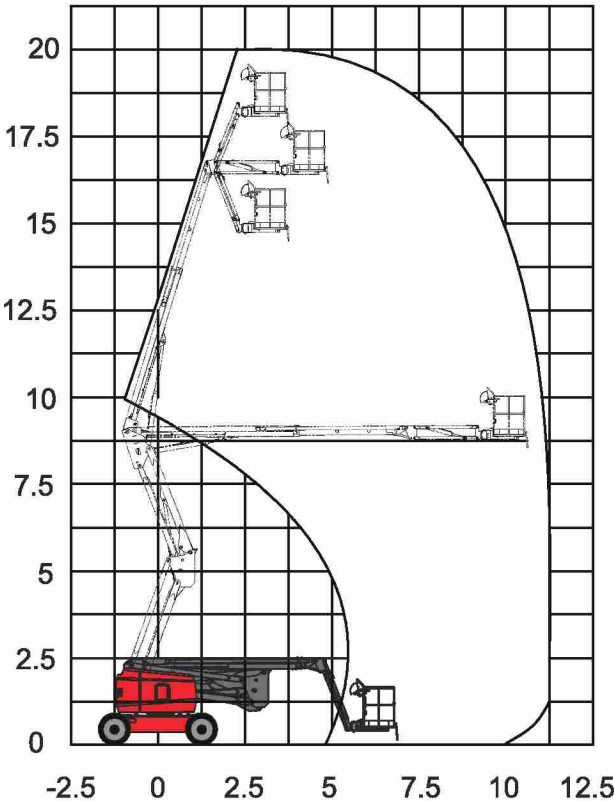

AB200J Collecting Chart

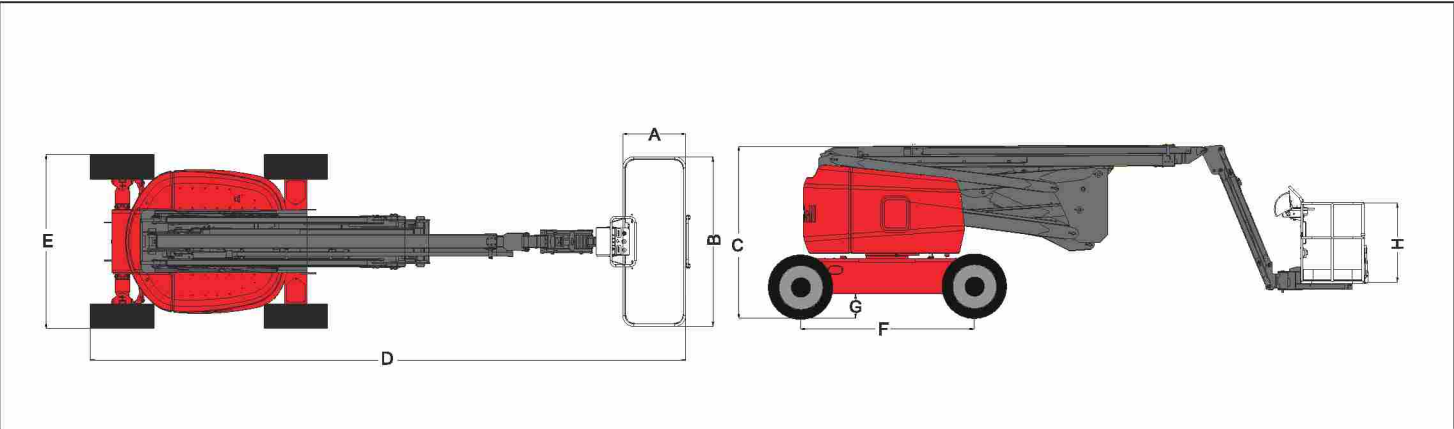

AB SERIES
SELF-PROPELLED ARTICULATING BOOMS

Standard Features


- Self-leveling platform
- Hydraulic rotation platform
- Hall effect fully propotional controls
- Driving confirm
- AC wiring to platform
- Horn
- Hour meter
- Tilt alarm
- Positive traction drive
- Dual speed motor
- Emergency pump
- CAN intelligent control
- Overload limited

Option Features


- 2.4m platform
- Swing axis
- Platform swing gate
- Platform alternate leverage
- Welder connecting packages
- Welder wire connecting to the platform
- Air line to the platform
- Hydraulic oil cooler
- Hostile environment packages
- Anti-crash air packages
- Tool tray
- Alarm packages
- Platform work lights

Model	AB140RT/AB140JRT
Lift Capacity Max	230 Kg
Working Height Max	14.00 m
Working Platform Height Max	12.00 m
Working Platform Outreach Max	7.20 m
Across Height Max	6.50 m
Turntable Rotation	360° Discrete
Drive Speed, Stowed	3.0 Km/h (7.0 Km/h 4WD)
Drive Speed, Extended	1.0 Km/h
Platform Rotation	180°
Boom Swing	0/140°
Platform Size A*B*H	1.8m x 0.835m x 1.1m
Leveling Platform	Hydraulic Level
Drive Wheels Number	2 (4 / 4WD)
Steering Wheel Number	2
Drive	Diesel Motor
System Voltage	DC12V
Tire Size	33*12-20
Controls	Electrical Proportional Control
Turning Radius- (Outside)	3.70 m
Turning Radius- (Inside)	2.30 m
Turntable Tailswing	0
Maximum Lateral Force	400N
Tilt Angle Max	3°
Wind Speed Allowed Max	12.5m/s
Gradeability	30% (45% 4WD)
Height-Stowed (C)	2.30 m
Length-Stowed (D)	5.65 m/ 6.20 m
Width-Stowed (E)	2.00 m
Wheelbase (F)	2.00 m
Ground Clearance (G)	0.36 m
Hydraulic Tank Capacity	110L
Fuel Tank Capacity	65L
Total Weight	5.6T/6T

AB140RT Working Range

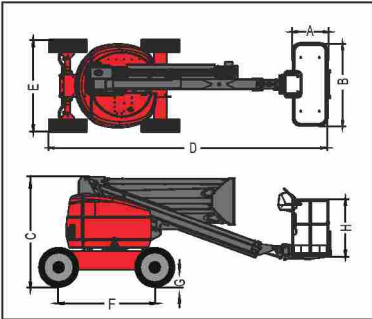


AB140JRT Working Range

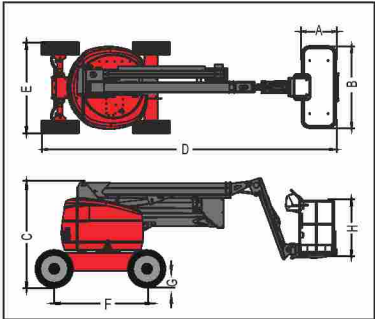


- The metric system height is 2 meters higher than platform height, the imperial height is 6 feet than platform height
- In the rising mode, the machine is designed to operate on a solid flat surface
- Climbing ability is suitable for driving on the slope, the slope classification reference operation manual
- Weight according to the options and standards vary from country to country

AB140RT Working Range

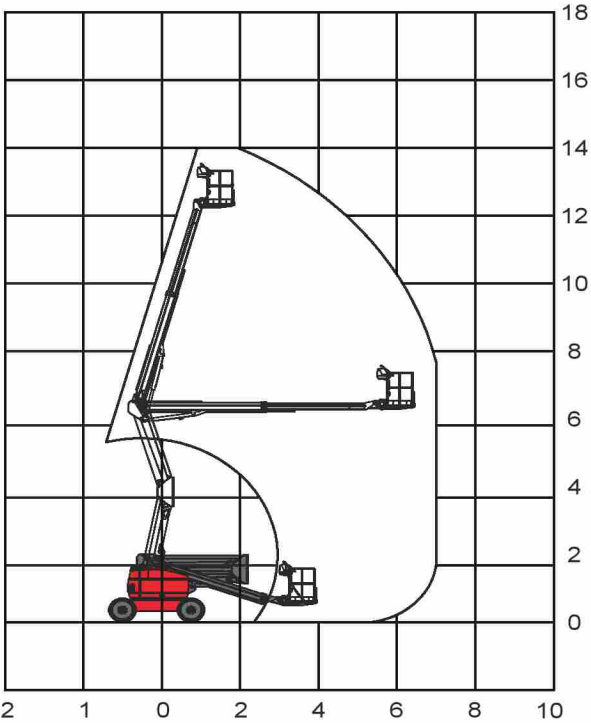

AB140JRT Working Range

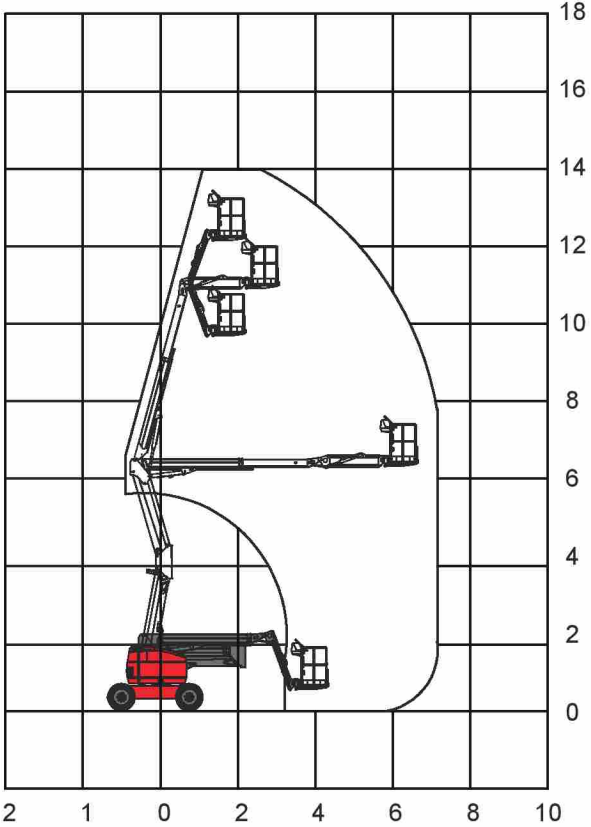



Standard Features


- Self-leveling platform
- Hydraulic rotation platform
- Hall effect fully propotional controls
- Driving confirm
- AC wiring to platform
- Horn
- Hour meter
- Tilt alarm
- Positive traction drive
- Dual speed motor
- Emergency pump
- CAN intelligent control
- Overload limited

Option Features


- 2.4m platform
- Swing axis
- Platform swing gate
- Platform alternate leverage
- Welder connecting packages
- Welder wire connecting to the platform
- Air line to the platform
- Hydraulic oil cooler
- Hostile environment packages
- Anti-crash air packages
- Tool tray
- Alarm packages
- Platform work lights

Model	AB160RT/AB160JRT
Lift Capacity Max	230 Kg
Working Height Max	16.00 m
Working Platform Height Max	14.00 m
Working Platform Outreach Max	7.70 m
Across Height Max	7.40 m
Turntable Rotation	360° Discrete
Drive Speed, Stowed	4.9 Km/h (7.0 Km/h 4WD)
Drive Speed, Extended	1.0 Km/h
Platform Rotation	180°
Boom Swing	0/140°
Platform Size A*B*H	1.8m x 0.76m x 1.1m
Leveling Platform	Hydraulic Level
Drive Wheels Number	2 (4 / 4WD)
Steering Wheel Number	2
Drive	Diesel Motor
System Voltage	DC12V
Tire Size	33*12-20
Controls	Electrical Proportional Control
Turning Radius- (Outside)	4.00 m
Turning Radius- (Inside)	1.70 m
Turntable Tailswing	0
Maximum Lateral Force	400N
Tilt Angle Max	3°
Wind Speed Allowed Max	12.5m/s
Gradeability	30% (45% 4WD)
Height-Stowed (C)	2.30 m
Length-Stowed (D)	6.0 m/ 6.50 m
Width-Stowed (E)	2.00 m
Wheelbase (F)	2.00 m
Ground Clearance (G)	0.36 m
Hydraulic Tank Capacity	110L
Fuel Tank Capacity	65L
Total Weight	6.1T/6.3T

AB160RT Working Range

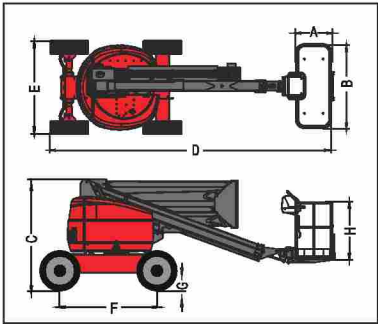


AB160JRT Working Range

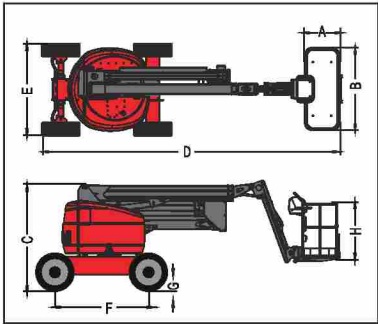


- The metric system height is 2 meters higher than platform height, the imperial height is 6 feet than platform height
- In the rising mode, the machine is designed to operate on a solid flat surface
- Climbing ability is suitable for driving on the slope, the slope classification reference operation manual
- Weight according to the options and standards vary from country to country

AB160RT Working Range

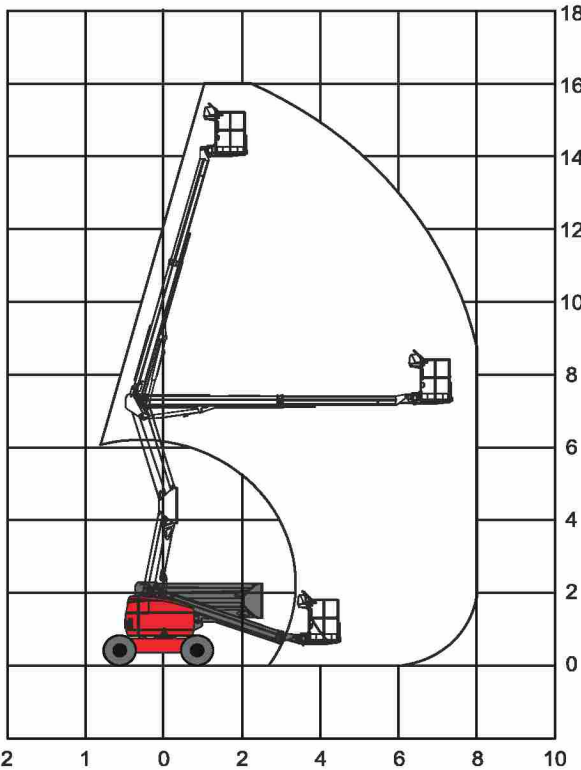

AB160JRT Working Range

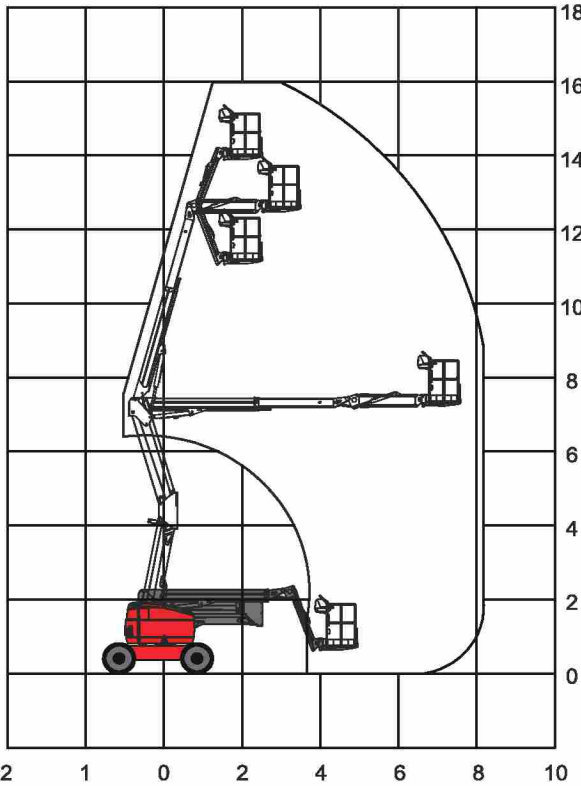

AB SERIES

SELF-PROPELLED ARTICULATING BOOMS







Standard Features

- Self-leveling platform
- Hydraulic rotation platform
- Hall effect fully proportional controls
- Driving confirm
- AC power to platform
- Horn
- Hour meter
- Tilt alarm
- Positive traction drive
- Dual speed motor
- Emergency pump
- CAN intelligent control
- Overload limited
- 360 degree non-continuous turntable rotation
- Non-mark solid tire

Options Features

- Swing axis
- Platform swing gate
- Platform alternate leverage
- Welding pre-assembly
- Welding line to work platform
- Air line to the platform
- Anti-crash air packages
- Tool tray
- Alarm packages
- Platform work lights
- Hydraulic oil in extremely cold areas
- Pipeline components in extremely cold regions

Model	AB180J RT	AB200J RT	AB260J RT
Lift capacity max	230KG	230kg	230KG
Working height max	18.0m	20.00m	26.0m
Working platform height max	16.0m	18.00m	24.0m
Working platform outreach max	9.5m	11.1m	15.1m
Across height max	7.6m	8.90m	10.3m
Turntable rotation	360° Continously	360° Continously	360° Continously
Drive speed, stowed	4.8km/h	4.8km/h	4.8km/h
Drive speed, extended	1.0km/h	1.0km/h	1.0km/h
Platform rotation	180°	180°	180°
Boom swing	0/135°	0/137°	0/135°
Platform size A*B*H	1.83mx0.76mx1.1m	2.4m x 0.9m x 1.1m	2.4mx0.9mx1.1m
Leveling platform	Hydraulic leveling	Hydraulic leveling	Hydraulic leveling
Drive wheels number	2	2/4WD	2
Steering wheel number	2	2	2
Drive	Yanmar4TNV88	Yanmar4TNV88	CumminsQSFT2.8-C
System voltage	DC12V	DC12V	DC12V
Tire size	355/55D-625	355/55D-625	385/55D-24Solid tire
Controls	Electrical proportional control		
Turning radius-(outside)	4.5m	5.4m	4.5m
Turning radius-(inside)	1.7m	2.2m	2.1m
Turntable tailswing	0	0	0
Maximum lateral force	400N	400N	401N
Tilt angle max	3°	3°	3°
Wind speed allowed max	12.5m/s	12.5m/s	12.5m/s
Gradeability	30% (45%4WD)	30% (45%4WD)	30%
Height-stowed C	2.50m	2.50m	2.70m
Length-stowed D	7.5m	8.60m	9.0m
Width-stowed E	2.3m	2.50m	2.5m
Wheelbase F	2.10m	2.50m	2.80m
Ground clearance G	0.32m	0.35m	0.33m
Hydraulic tank capacity	170L	170L	170L
Feul tank capacity	85L	85L	140L
Total weight	8.42T	11.8T	13T

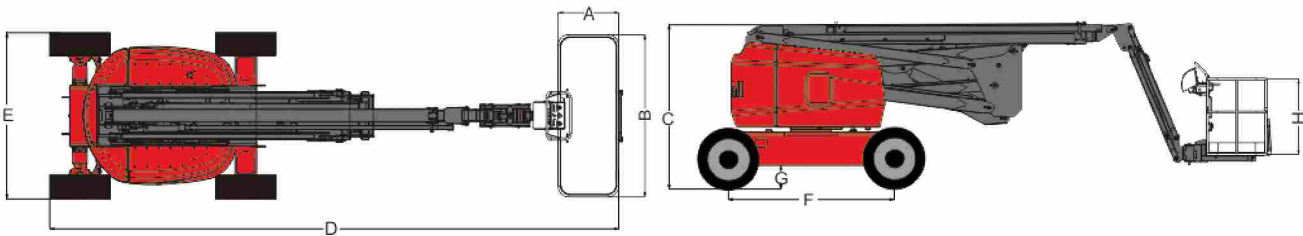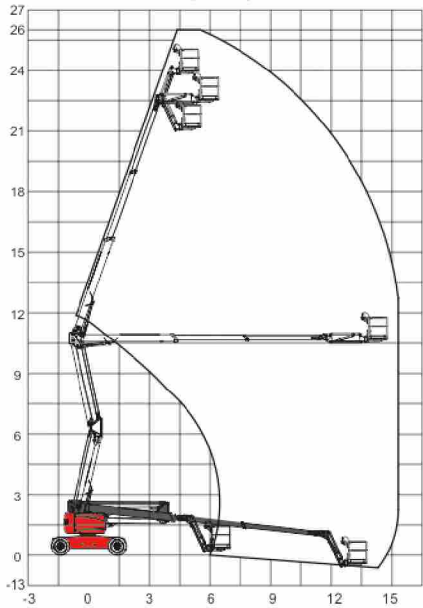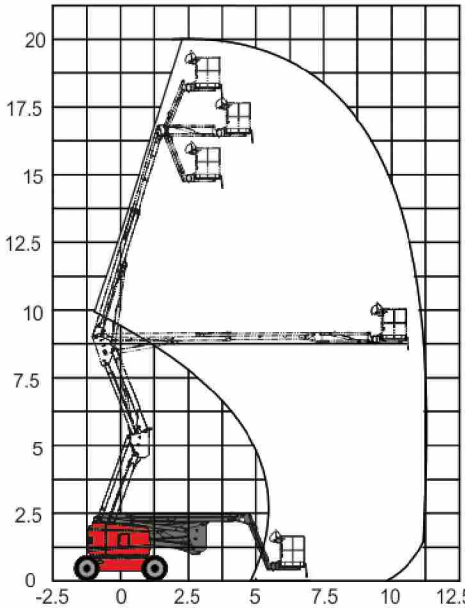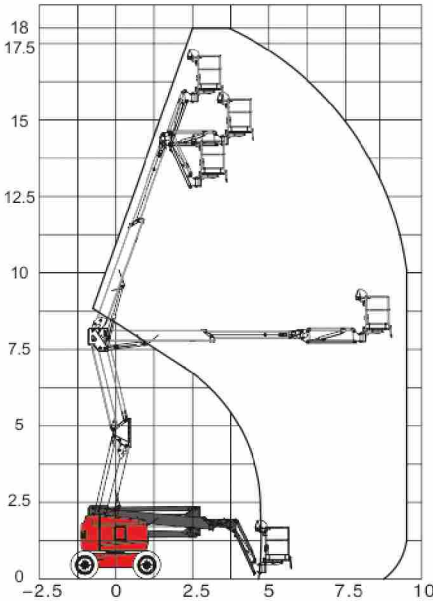

Flexible and accurate positioning

Shigemitsu S Series turntable 360 degrees rotation, lifting arm can extend a maximum of 14.5 meters, the platform can be rotated 180 degrees, work location and perfect service, easily transferred across the barrier.


Powerful extension capability

Shigemitsu series provide users with powerful extension capability, and its extended range can be up to 14.5 meters, providing convenience for a variety of environmental work.

Model	TM1470C	TM1770C	TM2110C	TM2512C	TM2815C
Working Height (m)	14.35	17.20	20.00	24.80	27.80
Platform Height (m)	12.35	15.20	18.00	22.80	25.80
Outreach Max (m)	7.00	7.40	10.00	12.50	14.50
Turntable Rotation°	360	360	360	360	360
Lift Capacity (Kg)	200	220	220	220	220
Platform Rotation°	180	180	180	180	180
Platform Size (mm)	1500*800*1150	1500*800*1150	1500*800*1150	1780*730*1120	1700*700*1100
Height-Stowed (mm) (1)	2700	2400	2400	3000	2920
Length-Stowed (mm) (6)	6350	5790	5790	8300	6900
Width-Stowed (mm) (9)	2100	2100	2100	2550	2200
Controls	Electrical Proportional Control				
Outriggers Type	Hydraulic				
Articulating Type	Steel Single Quads Type		Steel Dual Quads Type		
Chassis Specification	2T	3.5T	3.5T	6T	6T

Detailed Parameters, Please Consult The Shigemitsu Salles Representatives

TM Working Range

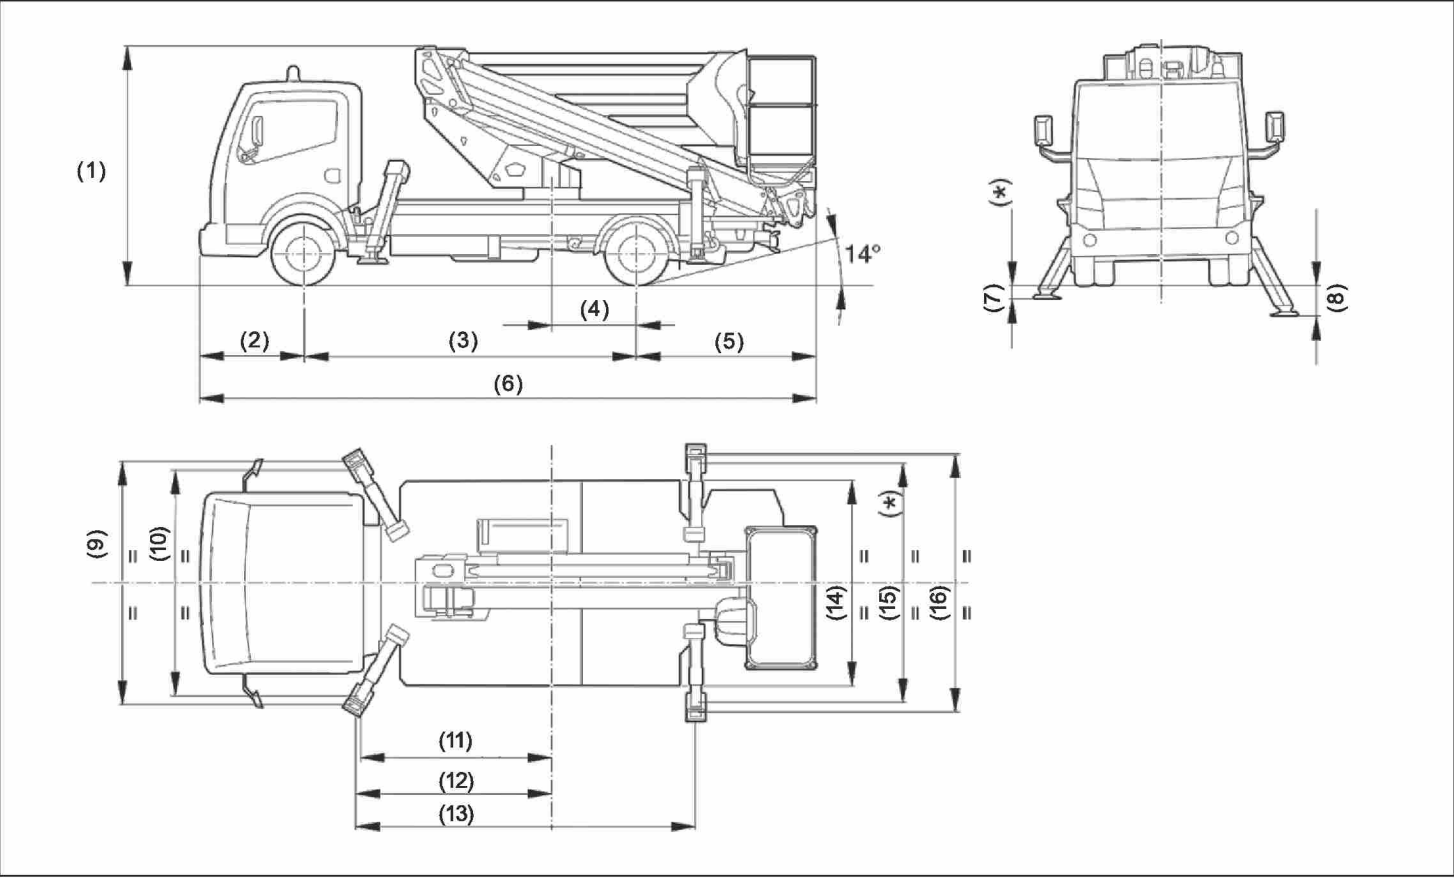



Standard Features

- Incorporate a silent ratchet system
- Transportation wheels
- Roller wheels with brake
- Standard forks
- Telescopic mast design
- Solid Steel base


Option Features

- Adjustable Forks
- Flat Forks
- Boom
- Pipe cross Forks
- Load Platform
- Anti-fall function


Model	SML-10	SML-15	SML-20	SML-25
Measurements				
Working Height				
(1) Standard Forks-Up	3.48 m	5.00 m	6.45 m	7.95 m
(2) Standard Forks-Down	2.96 m	4.48 m	5.93 m	7.43 m
Adjustable Forks-Up	3.48 m	5.00 m	6.45 m	7.95 m
Adjustable Forks-Down	2.96 m	4.48 m	5.93 m	7.43 m
Flat Forks	2.96 m	4.48 m	-	-
Boom***	3.28 m	4.76 m	6.25 m	7.42 m
Load Platform**-Fork Up	3.49 m	4.98 m	6.46 m	7.94 m
Load Platform**-Fork Down	2.97 m	4.46 m	5.94 m	7.42 m
(3) Height-Stowed	1.98 m	1.98 m	1.98 m	1.98 m
(4) Length-Stowed	0.75 m	0.75 m	0.75 m	0.83 m
(5) Length-Operating	2.2 m	2.2 m	2.2 m	2.2 m
(6) Width-Stowed*	0.79 m	0.79 m	0.79 m	0.79 m
Width-Straddle Base*				
Minimum	0.80 m	0.80 m	-	-
Maximum	1.47 m	1.47 m	-	-
Maximum Inside	1.27 m	1.27 m	-	-
(7) Ground Clearance-Center	0.05 m	0.05 m	0.05 m	0.05 m
Load Height Minimum	0.15 m	0.15 m	0.15 m	0.15 m
Productivity				
Load Capacity				
46 cm Load Center	454 Kg	363 Kg	363 Kg	295 Kg
61 cm Load Center	454 Kg	363 Kg	272 Kg	204 Kg
1.07 m Load Center	181 Kg	227 Kg	159 Kg	113 Kg
Power				
Power	Single Speed Winch			
Weight				
Standard	163 Kg	183 Kg	203 Kg	224 Kg


* Outside Dimensions
** For use with standard and adjustable forks only
*** Measured from ground to bottom of shackle

ALP Working Range

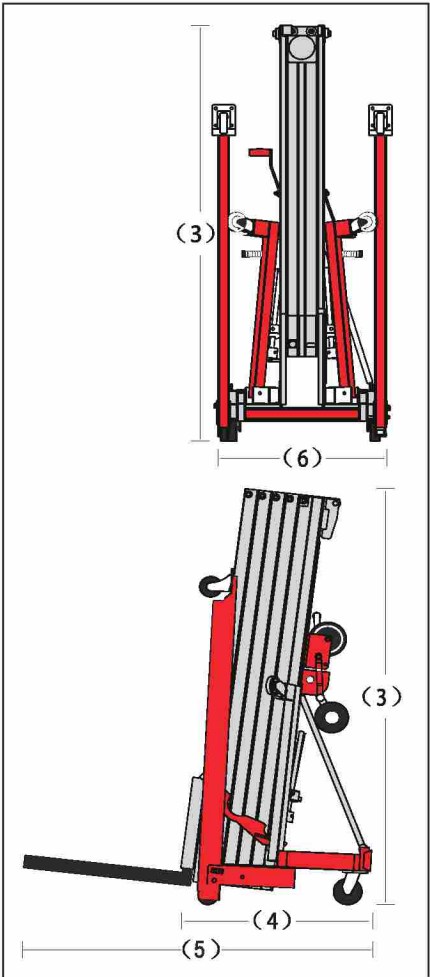

ALP Working Range

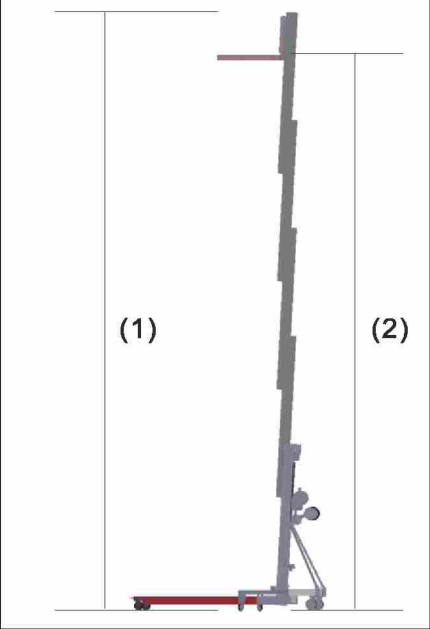

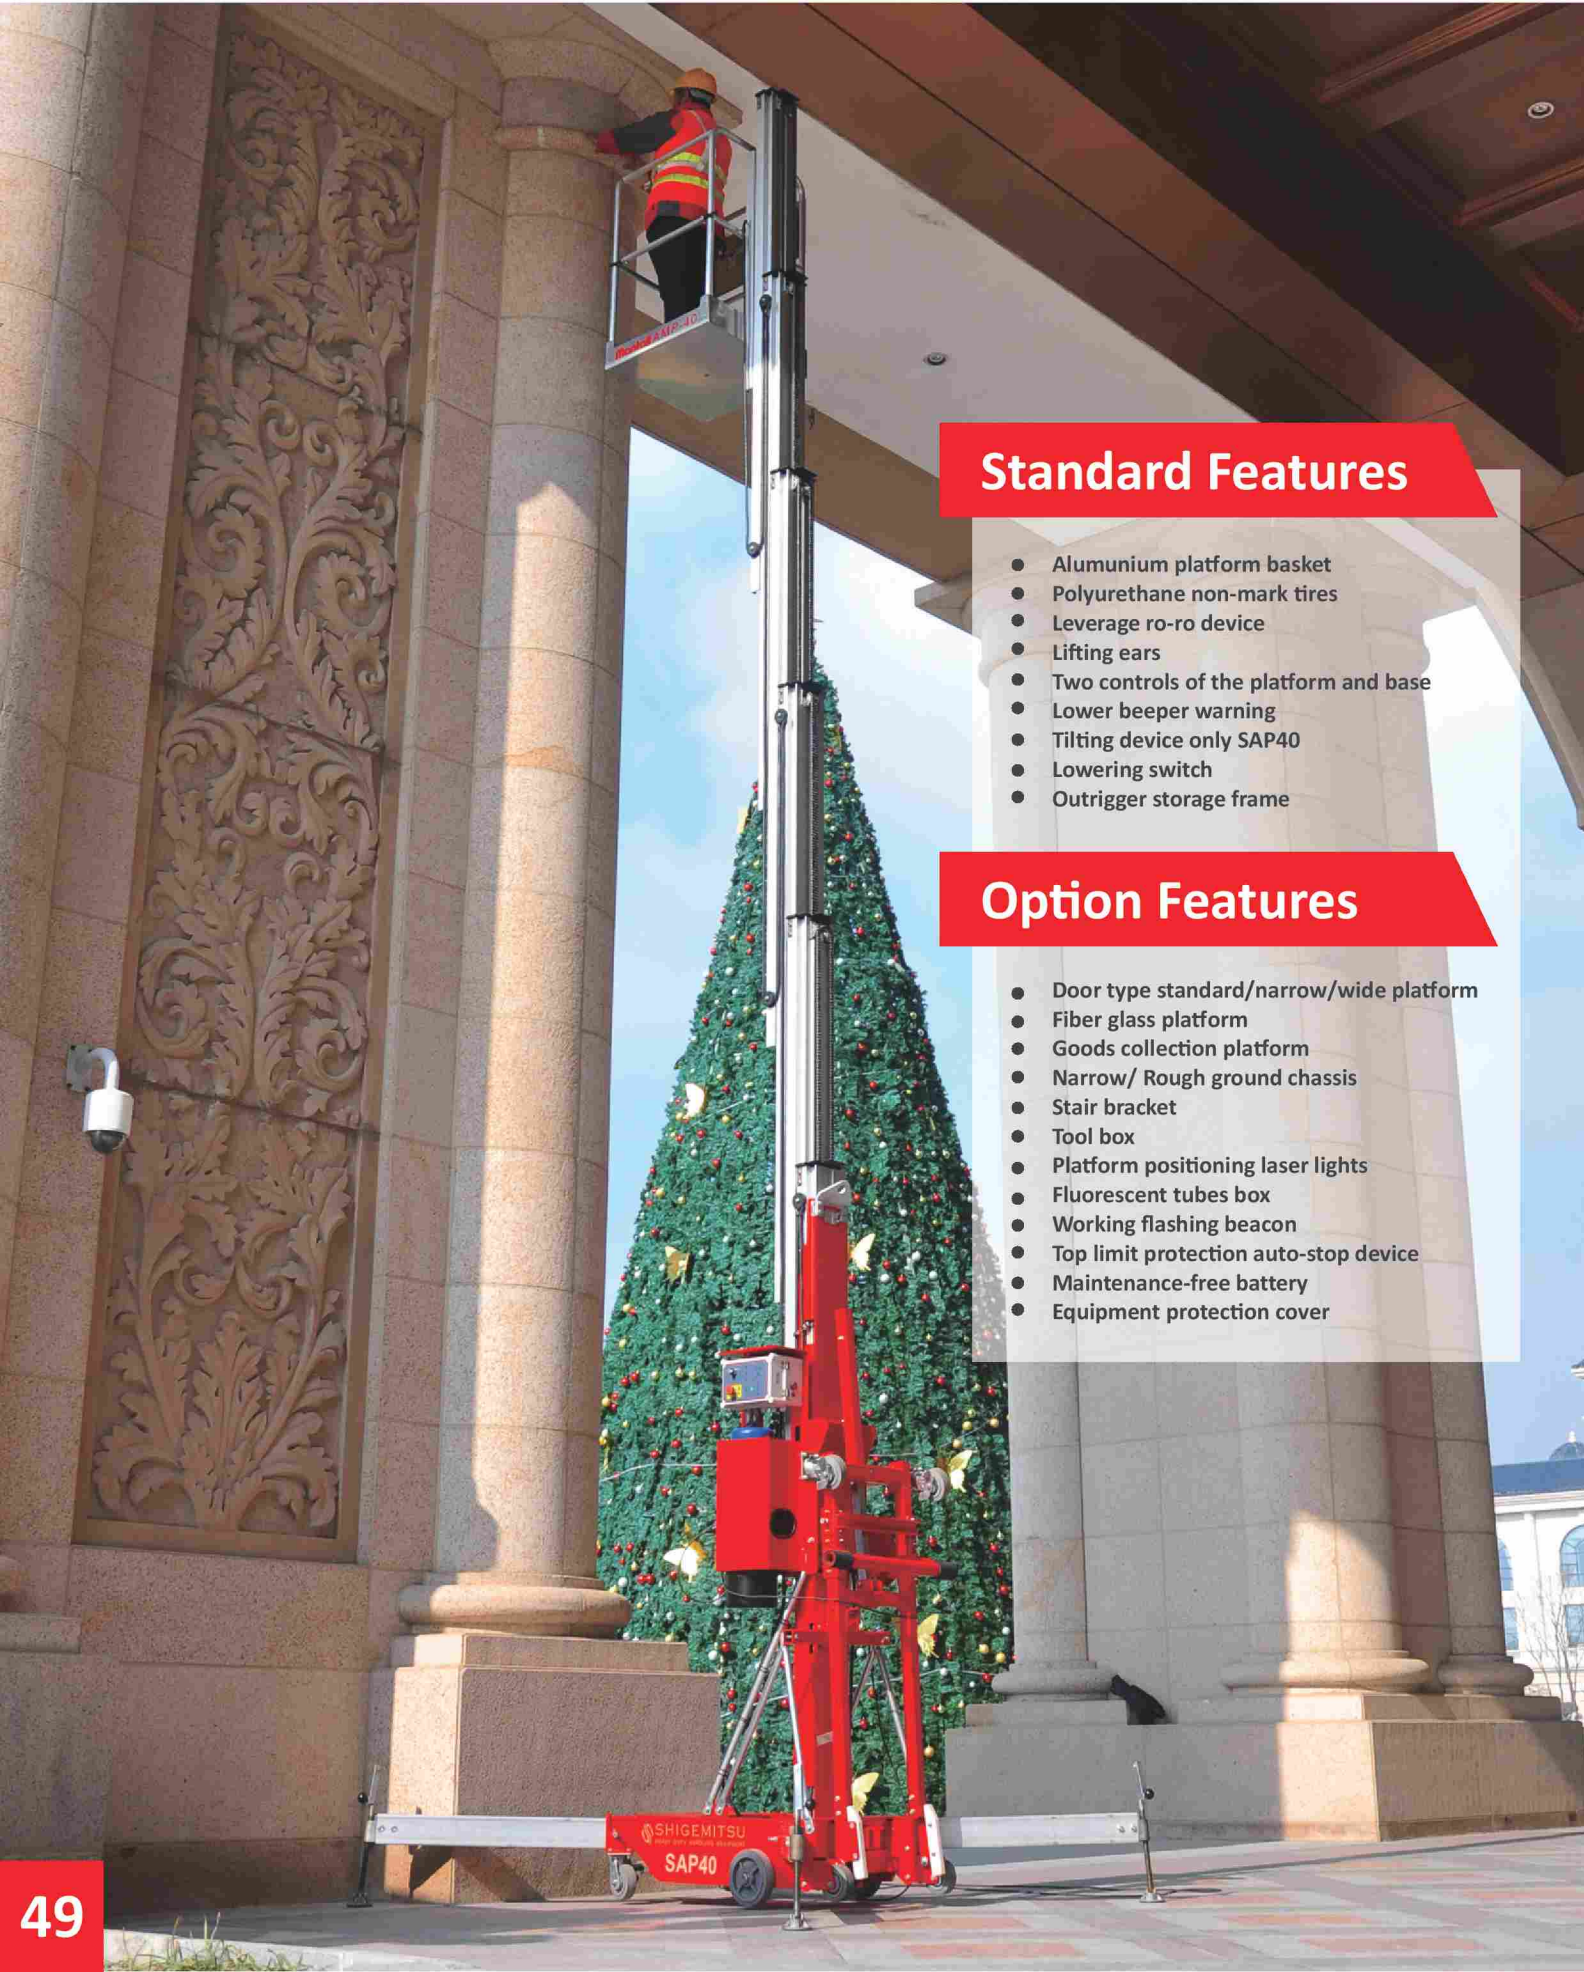

Standard Features

- Alumunium platform basket
- Polyurethane non-mark tires
- Leverage ro-ro device
- Lifting ears
- Two controls of the platform and base
- Lower beeper warning
- Tilting device only SAP40
- Lowering switch
- Outrigger storage frame


Option Features

- Door type standard/narrow/wide platform
- Fiber glass platform
- Goods collection platform
- Narrow/ Rough ground chassis
- Stair bracket
- Tool box
- Platform positioning laser lights
- Fluorescent tubes box
- Working flashing beacon
- Top limit protection auto-stop device
- Maintenance-free battery
- Equipment protection cover


Model	SAP20	SAP26	SAP32	SAP40
Working Height Max.	8.0 m	10.0 m	12.0 m	14.0 m
Platform Height Max.	6.0 m	8.0 m	10.0 m	12.0 m
Lift Capacity	159 Kg	159 Kg	159 Kg	120 Kg
Basket Size (E*F)	0.69 m * 0.68 m	0.69 m * 0.68 m	0.68 m * 0.68 m	0.69 m * 0.68 m
Width, Stowed (D)	0.74 m	0.74 m	0.74 m	0.74 m
Height, Stowed (A)	1.97 m	1.97 m	1.97 m	2.76 m
Height, Tilted Back (B)	--	--	--	1.98 m
Length, Stowed (C)	1.27 m	1.36 m	1.42 m	1.46 m
Length, Tilted Back (J)	--	--	--	2.87 m
Outrigger Footprint (L*K)	1.77 m * 1.49 m	1.77 m * 1.49 m	1.99 m * 1.72 m	2.27 m * 1.98 m
Wall Access Front/ Side (H/G)	0.18/1.49 m	0.18/0.45 m	0.23/0.55 m	0.42/0.65 m
Power Source (AC/DC)	220V/110V/12V			
Weight (AC/DC)	335 Kg / 405 Kg	355 Kg / 430 Kg	365 Kg / 480 Kg	480 Kg / 535 Kg

- The metric system height is 2 meters higher than platform height, the imperial height is 6 feet than platform height
- In the rising mode, the machine is designed to operate on a solid flat surface
- Climbing ability is suitable for driving on the slope, the slope classification reference operation manual
- Weight according to the options and standards vary from country to country

SAP Collecting Chart

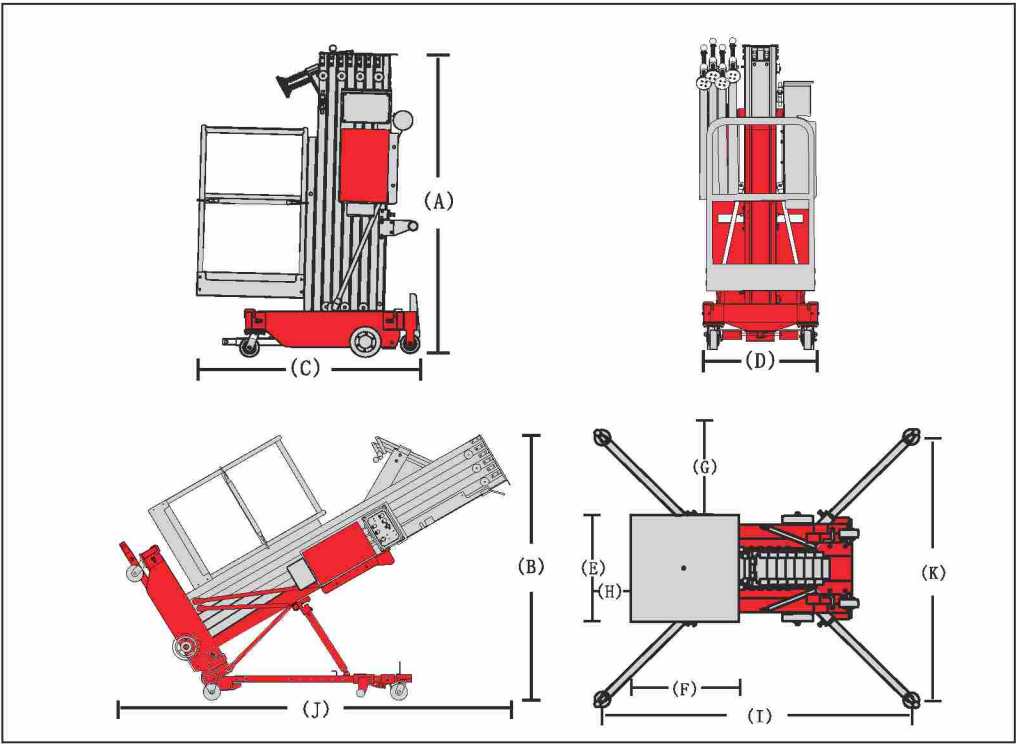

SAP Working Range

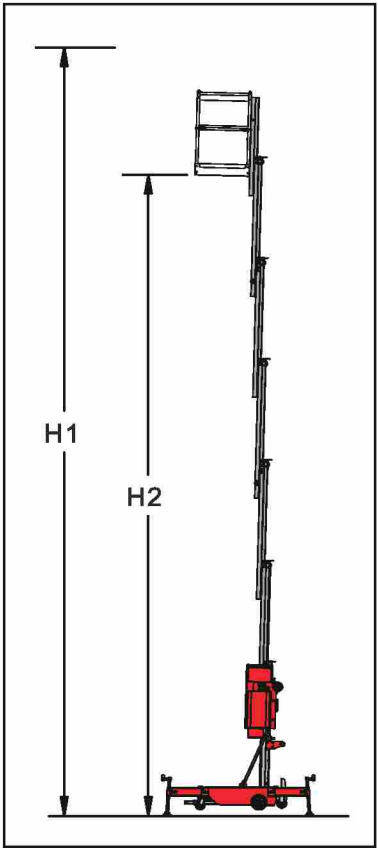



Standard Features

- Aluminium platform basket
- Polyurethane non-mark tires
- Leverage ro-ro device
- Lifting ears
- Two controls of the platform and base
- Lower beeper warning
- Tilting device
- Lowering switch
- Outrigger storage frame


Option Features

- Door type standard/ narrow/ wide platform
- Fiber glass platform
- Goods collection platform
- Narrow/ Rough ground chassis
- Stair bracket
- Tool box
- Platform positioning laser lights
- Fluorescent tubes box
- Working flashing beacon
- Top limit protection auto-stop device
- Maintenance-free battery
- Equipment protection cover


Model	SLP26	SLP32	SLP40
Working Height Max.	10.0 m	12.0 m	14.0 m
Platform Height Max.	8.0 m	10.0 m	12.0 m
Lift Capacity	136 Kg	120 Kg	120 Kg
Basket Size (E*F)	0.68 m * 1.68 m		
Width, Stowed (D)	0.74 m	0.74 m	0.74 m
Height, Stowed (A)	1.98 m	2.63 m	2.94 m
Height, Tilted Back (B)	--	1.98 m	1.98 m
Length, Stowed (C)	1.45 m	1.45 m	1.45 m
Length, Tilted Back (I)	--	2.63 m	2.94 m
Outrigger Footprint (L*K)	1.86 m * 2.0 m	2.13 m * 2.0 m	2.13 m * 2.0 m
Wall Access Front/ Side (H/G)	1.13/0.58 m	0.26/0.71 m	0.26/0.71 m
Power Source (AC/DC)	220V/110V/12V		
Weight (AC/DC)	400 Kg / 540 Kg	500 Kg / 610 Kg	540 Kg / 655 Kg

- The metric system height is 2 meters higher than platform height, the imperial height is 6 feet than platform height
- In the rising mode, the machine is designed to operate on a solid flat surface
- Climbing ability is suitable for driving on the slope, the slope classification reference operation manual
- Weight according to the options and standards vary from country to country

SLP Collecting Chart

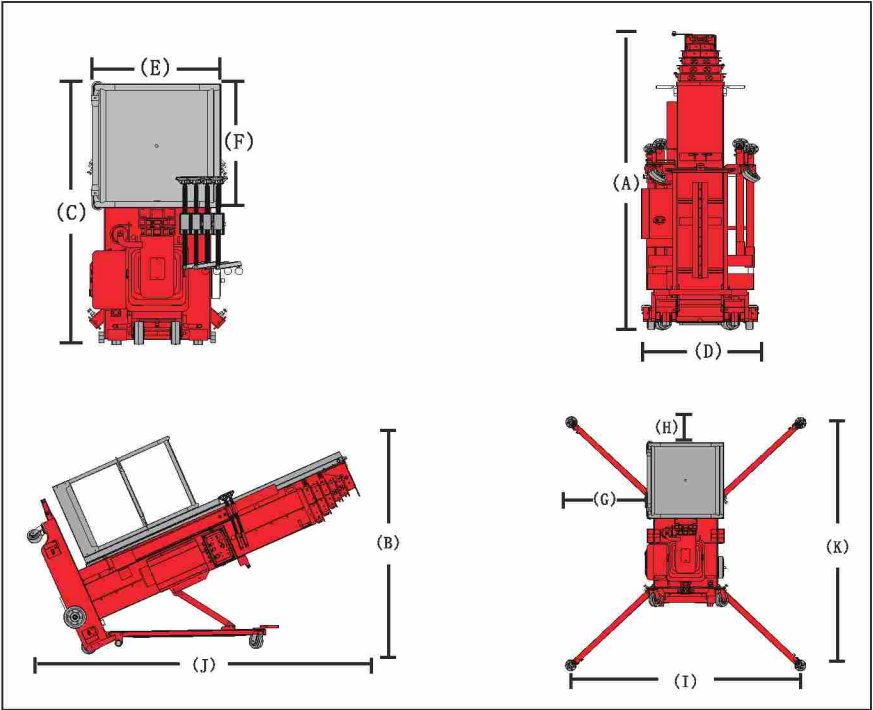

SLP Working Range

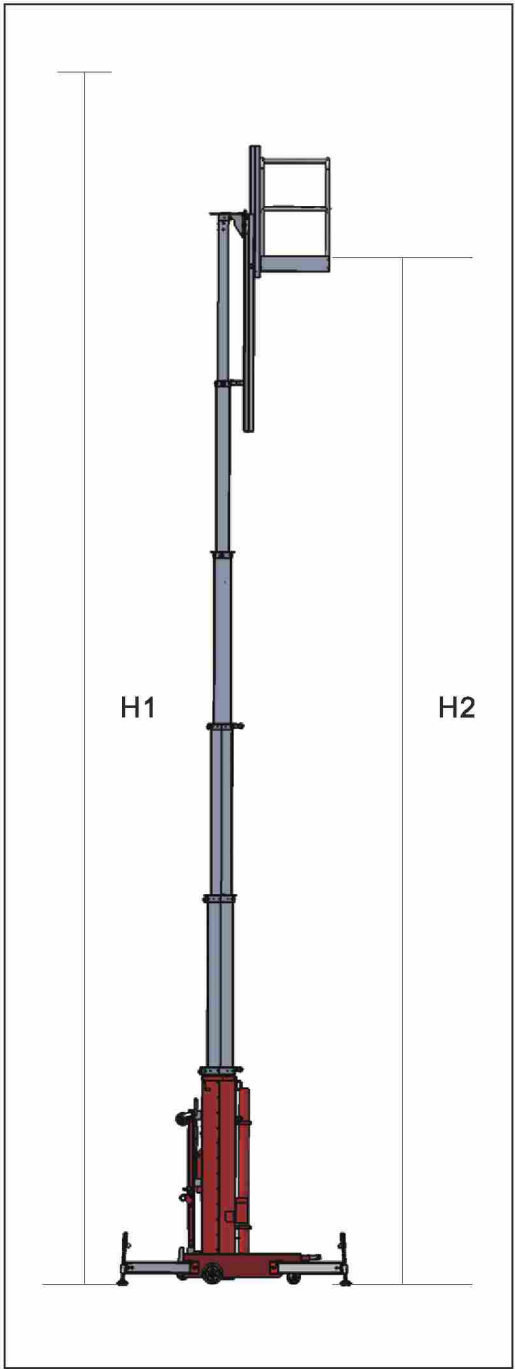

DAP SERIES
DOUBLE MAST AERIAL WORK PLATFORM

Standard Features


- Alumunium platform basket
- Polyurethane non-mark tires
- Forklift pockets
- Foldable inclined ladder
- Two controls of the platform and base
- Lower beeper warning
- Reversal platform
- Lowering switch
- Outrigger storage frame

Option Features


- Door type wide platform
- Fiber glass platform
- Narrow/ Rough ground chassis
- Wide Chassis
- DC power
- Tool box
- Platform positioning laser lights
- Fluorescent tubes box
- Working flashing beacon
- Top limit protection auto-stop device
- Auxiliary drive wheel
- Maintenance-free battery
- Equipment protection cover

Model	DAP-10	DAP-12	DAP-14	DAP-16	DAP-18
Standard Parameter					
Working Height (m)	10	12	14	16	18
Platform Height (m)	8	10	12	14	16
Lift Capacity (Kg)	272	272	200	200	150
Weight (Kg)	800	850	900	1065	1185
Stowed Size (m) (A*B*C)	1.48 x 0.8 x 1.98		1.6 x 0.8 x 1.98	1.75 x 0.81 x 2.36	2 x 0.8 x 2.75
Platform Size (m) (D*E*H)	1.37 x 0.7 x 1.1		1.5 x 0.7 x 1.1	1.46 x 0.6 x 1.1	1.8 x 0.7 x 1.1
Outrigger Footprint (m) (F*G)	1.9 * 2.1		2.5 * 2.1	2.7 * 2.8	2.7 * 2.8
Power Source (AC/DC)	220V/110V/12V				
Option Wide Chassis Parameter					
Stowed Size (m) (A*B*C)	2.02 x 0.8 x 2		2.02 x 0.8 x 2.75	-----	
Platform Size (m) (F*G)	1.63 x 0.8 x 1.1		1.8 x 0.7 x 1.1	-----	
Outrigger Footprint (m) (F*G)	1.8 x 3.0		2.7 x 2.8	-----	
Weight (Kg)	885	935	985	-----	-----
Option Rotate Chassis Parameter					
Stowed Size (m) (A*B*C)	-----				2.7 x 0.85 x 1.98
Platform Size (m) (D*E*H)					1.49 x 0.78 x 1.1
Outrigger Footprint (m) (F*G)					2.98 x 2.81
Weight (Kg)					1540

DAP Working Range

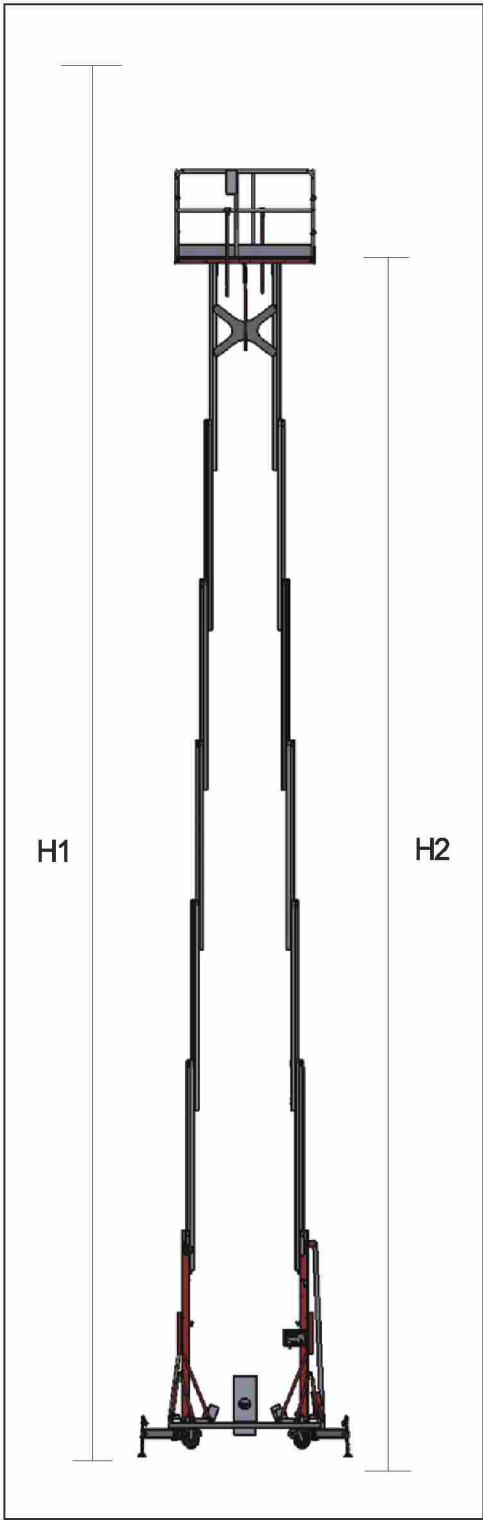

DAP Collecting Chart

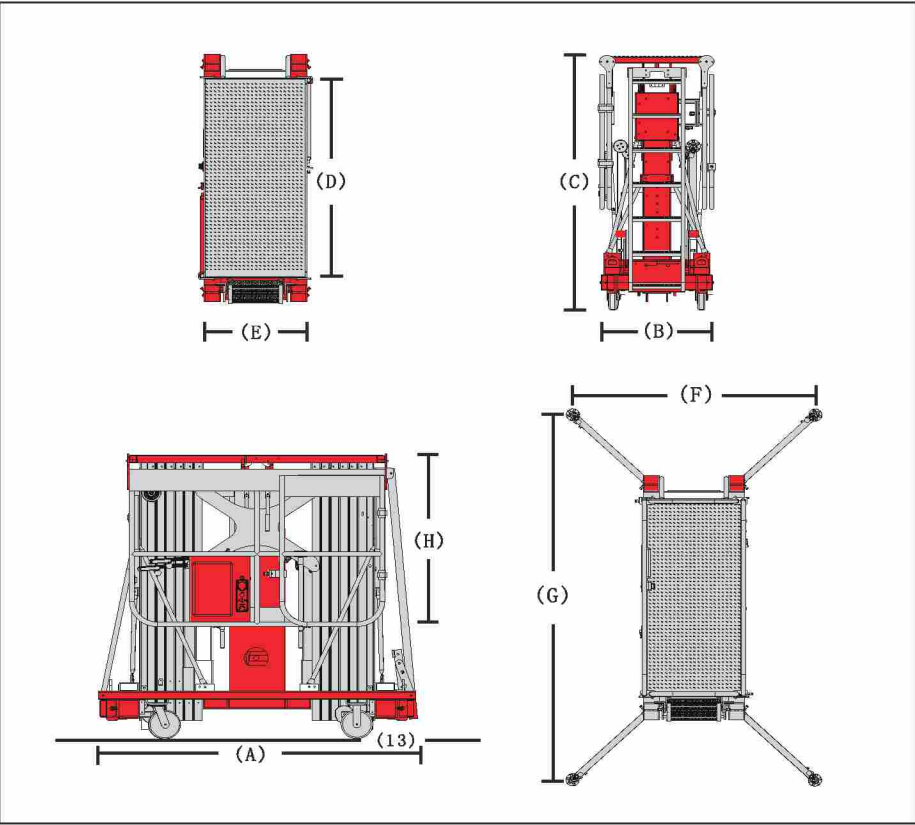

SSAP SERIES
SELF-PROPELLED SINGLE MAST AERIAL PLATFORM

Standard Features

- The working height can reach up to 8m
- The lift capacity can reach to 350 lbs (160kg)
- Standard platform with median sliding rod
- Auxiliary platform lowering system
- The platform entrance height for a minimum of 0.38 meters
- Ground emergency lowering valve
- Proportional raising and driving control
- Diagnosis system
- AC wiring to platform
- Adjustable work tray
- Lowering and tilting alarm
- Turn inter-radius is 0
- Double wheel brake
- Hydraulic brake release
- Pothole guards
- The rear shield mounted with hinge, Conveniently to close to all major electrical and Hydraulic Components
- Transportation fixing hole
- Wide type forklift handling notch
- Non-mark solid tire


Option Features

- Door type standard/ narrow/ wide platform
- Extendable platform
- Fiber glass platform
- Goods collection platform
- Motion alarm
- Tool box
- Platform positioning laser lights
- Fluorescent tubes box
- Working flashing beacon
- Top limit protection auto-stop device
- Maintenance-free battery
- Can not be drive when charging




Model	SSAP55	SSAP65	SSAP80
Working Height (m)	5.5 m	6.5 m	8 m
Platform Height	3.5 m	4.5 m	6 m
Platform Size (Length*Width) Standard	0.9 x 0.75 m		
Standard Extension Platform	1.50 x 0.75 m		
Length Of The Machine With Platform Extended (D)	2.0 m		
Stowed Size (A*B*C)	1.6 x 1.40 x 0.8		2 x 1.4 x 0.8
Lift Capacity	230 Kg		160 Kg
Weight	716 Kg	993 Kg	1110 Kg
Raising/ Lowering Time	20/18s		24/21s
Ground Clearance	0.06 m		
Extension Platform-Lift Capacity*	115 Kg		
Driving Speed-Stowed	4.0 Km/h		
Gradeability	30%		
Inside Rotation Radius	0		
Outside Rotation Radius	1.42 m		
Control	Electro-hydraulic Control		
Tire	Seamless 250 mm x 80 mm x 200 mm		
Power Source	DC 24V 225Ah		
Hydraulic Tank Capacity	8.5 L		

SSAP Working Range

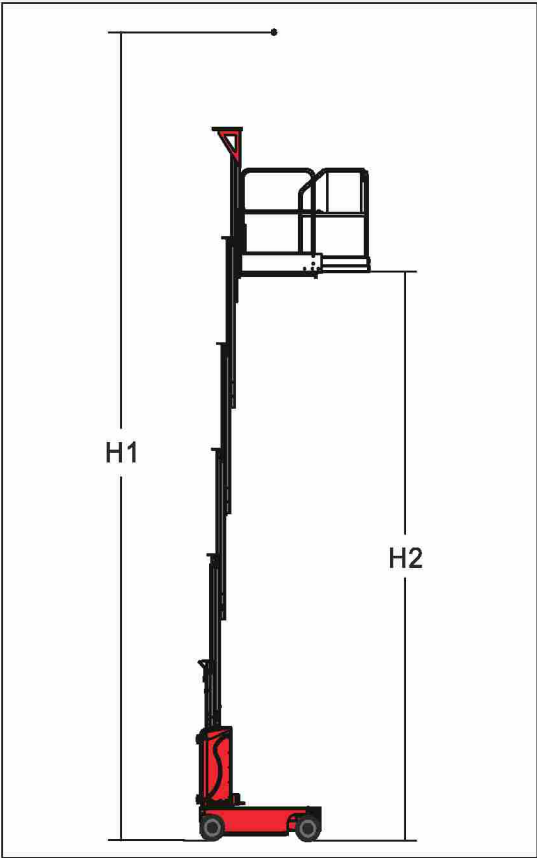

- The metric system height is 2 meters higher than platform height, the imperial height is 6 feet than platform height
- In the rising mode, the machine is designed to operate on a solid flat surface
- Climbing ability is suitable for driving on the slope, the slope classification reference operation manual
- Weight according to the options and standards vary from country to country

SSAP Collecting Chart

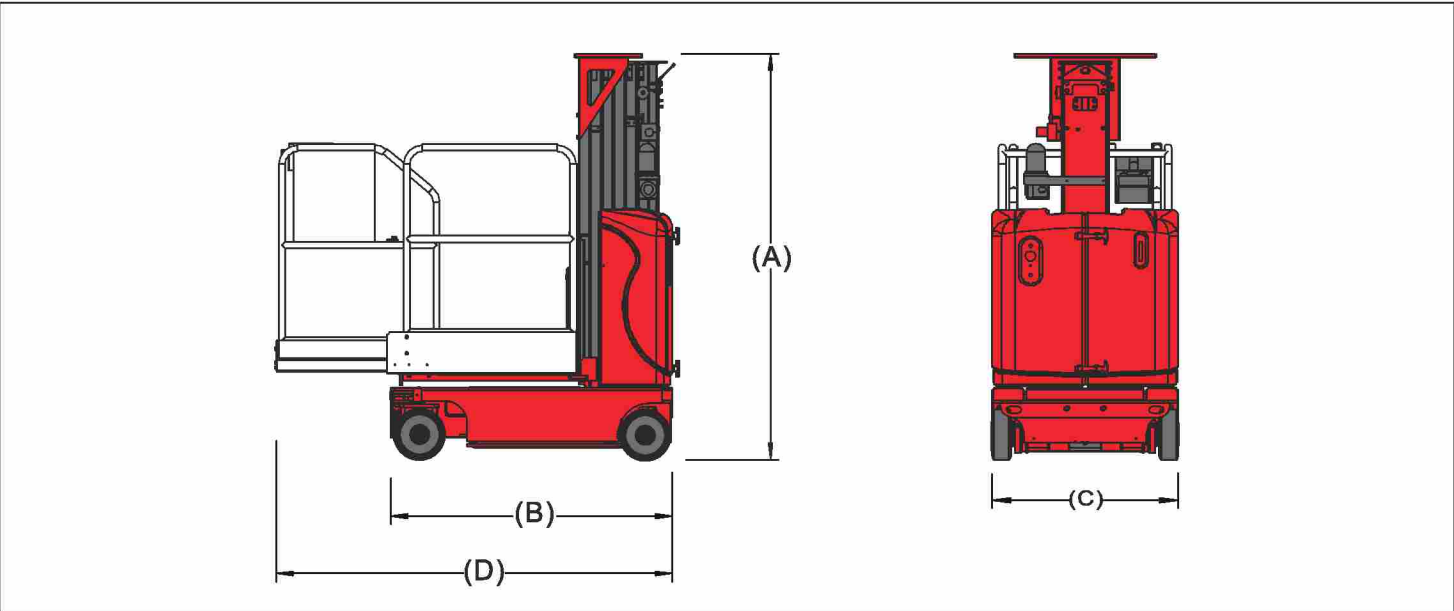

SSAP-J SERIES

SELF-PROPELLED AERIAL WORK PLATFORM



Standard Features


- The working height can reach up to 10m
- The lift capacity can reach to 200kg
- Standard platform with median sliding rod
- Auxiliary platform lowering system
- Ground emergency lowering valve
- Proportional raising and driving control
- Diagnosis system
- AC wiring to platform
- Adjustable work tray
- Lowering and tilting alarm
- Turn inter-radius is 0
- Double wheel brake
- Hydraulic brake release
- Pothole guards
- The rear shield mounted with hinge,
- Conveniently to close to all major electrical and Hydraulic Components
- Transportation fixing hole
- Wide type forklift handling notch
- Non-mark solid tire

Option Features

- Door type standard/ narrow/ wide platform
- Extendable platform
- Fiber glass platform
- Goods collection platform
- Motion alarm
- Tool box
- Platform positioning laser lights
- Fluorescent tubes box
- Working flashing beacon
- Top limit protection auto-stop device
- Maintenance-free battery
- Can not be drive when charging

Model	SSAP80J	SSAP100J
Working Height Max. H1 (m)	8	610
Platform Height Max. H2 m	6	8
Outreach Max. m	3.15	3.15
Lifting Capacity Kg	200	200
Weight Kg	2800	2870
Platform Size, (LxWxH) m	0.91*0.85*1.14	091*0.85*1.14
Stowed Size, (LxWxH)	2.76*0.99*1.99	2.76*0.99*1.99
Gradeability	23%	23%
Wheelbase m	1.2	1.2
Ground Clearance	0.075	0.075
Pothole Protection Board Ground Clearance, m	0.025	0.025
Turning Radius (Outside) m	1.82	1.82
Turning Radius (Inside) m	0	0
Jib Swing	-60°/+60°	-60°/+60°
Vertical Tilt Max	3	3
Driving Speed, Stowed (Km/h)	4.5	4.5
Driving Speed, Raised (Km/h)	0.7	0.5
Power Source	24V/240Ah	24/240Ah
Tire Size (mm)	406*125	406*125


SSAP-J Working Range

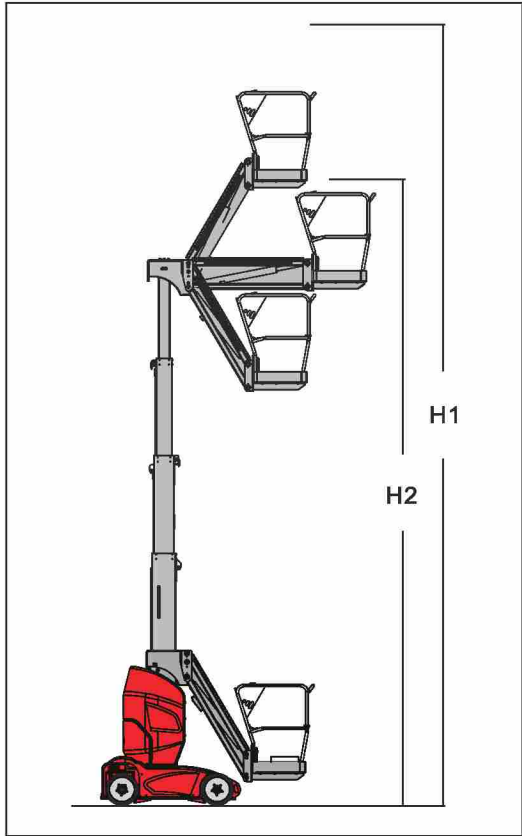

The New Design Lighter and More Flexible

SSAP-J Series Self-propelled Single Mast Aerial Work Platform has compact design, light weight, quickly up adn down and self-propelled, can greatly improved its work efficiency. With unique 'Zero inside turning radius', it is flexible and used in narrow space. Shigemitsu SSAP100J is full with modernistic felling, using the streamlined design and the appearance of lines are strong. It is suitable for indoor narrow space, self-weight is light and stowed size is small (2.69m length * 0.99m width * 1.99m height). It has a working height of 10m and 3.2m working radius

SSAP Collecting Chart

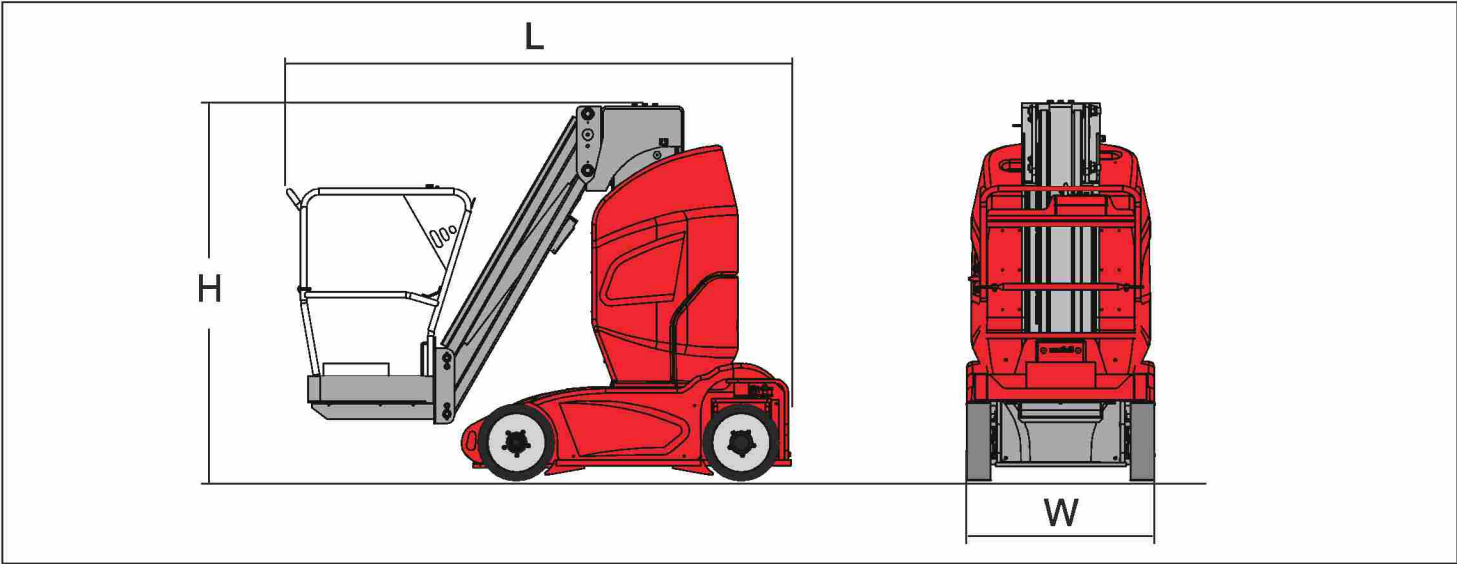

SSAP 120J SERIES
SELF-PROPELLED AERIAL WORK PLATFORM



Standard Features

- 345 degree discontinuous rotation
- Jib swing: -60 degree/+75 degree
- Platform swing: left 45 degree/ right 45 degree
- Non-marking rubber tires (size 457*178*308)
- 2.5 degree tilt alarm
- Lifting ears (4 pieces)
- Hour meter
- Proportional control
- Horn
- Fault diagnosis system
- Automatic brake system
- Explosion-proof of the tubing
- Manual brake release
- Overload sensor
- Platform foot switch
- All motion alarm systems
- Platform weighing system
- Emergency lowering down system


Options Features

- Handheld fault diagnostics
- Air line to the platform
- Platform working light
- AC power to the platform
- Platform swing gate
- Tool bracket
- Mobile alarm
- Top limit protection auto-stop device
- Maintenance free battery
- Fiberglass platform

The Shigemitsu SSAP120J has a maximum working height of 12 meters and a load capacity of 200KG. SSAP120J can be used in multiple dimension in a narrow space. The maximum working radius is 6 meters and can be used under -1 meter working conditions. The maximum span height is 5.9 meters. The rotary table can be flexibly rotated by 345 degrees, and the rotation of the platform is ± 45 degrees. The arm swings up and down: -60 degrees / +75, machine body width is only 1.2 meters, which makes the users working range significantly increased. The SSAP120J uses AC motor drive to greatly reduce the maintenance cost of the user. With a stable control system, the company can operate multiple actions at the same time, effectively improving user productivity. The SSAP120J uses an electric automatic leveling system to make the user feel more stable and safe. The SSAP120J's tilting overloading and other security protection systems allow, overloading and other security protection systems allow users to use the device in a safe situation.

Model	SSAP120J
Working height max. m	12
Platform height max. m	10
Working radius max.m	6
Span height max.m	5.9
Wheelbase m	1.6
Rotating inner radius m	0.75
Rotating outer radius m	2.6
Load capacity kg	200
Stowed size (length * width * height) m	3.7*1.2*1.99
Turntable rotation°	345°
Jib swing °	-60/+75
Platform swing °	Left45/Right45
Center ground clearance m	0.12
Pit protection board ground clearance m	0.074
Gradeability	30%
Driving speed	6km/h
Platform size (length X width X height) m	1.1X0.8X1.1
Maximum allowable tilt angle °	3
Tire size mm	457X178X308
Machine weight kg	4300

IMP-J Collecting Chart

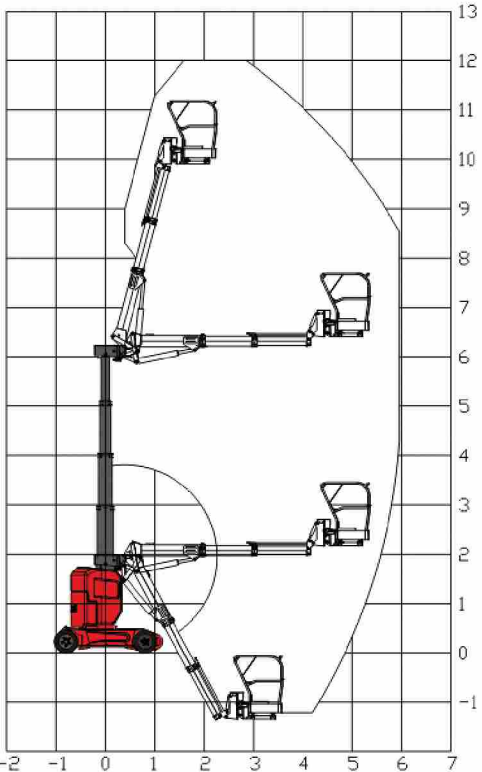

IMP-J Working Range

