

INDOTARA®

PT. INDOTARA PERSADA

Jakarta Head Office

Graha Kencana Building Lt. 10 Suite 10F
Jl. Raya Perjuangan No. 88
Kebon Jeruk, Jakarta Barat 11530
Phone : 021 - 5011 2224
Email : sales@indotara.co.id

Medan Office

Kompleks MMTc WAREHOUSE
Blok C-7 Jl. Pasar V, Pancing,
Medan, Sumut 20371
Phone : 061 - 50 300 600
Email : sales-mdn@indotara.co.id

Bandung Office

Wisma HSBC Lt. 6 Suite B
Jalan Asia Afrika No.116,
Kota Bandung, Jawa Barat 40112
Phone : 022 - 310 30 800
Email : sales-bdg@indotara.co.id

Semarang Office

Wisma HSBC Lt.6 Suite 609
Jl. Gajah Mada No. 135
Semarang, Jawa Tengah 50134
Phone : 024 - 40 33 88 99
Email : sales-smg@indotara.co.id

Surabaya Office

Bumi Mandiri Tower I Lt 10 Suite 1008
JL. Jend.Basuki Rachmat 129-137,
Surabaya, Jawa Timur 60271
Phone : 031 - 3313 3333
Email : sales-sby@indotara.co.id

Indotara Showroom

Jl. Milenium 22 Blok R3 No.1
Cikupa 15710
Kab. Tangerang - Banten
Phone : 021 - 5020 3030
Email : warehouse@indotara.co.id

SHIGEMITSU
ヘビーデューティコンベヤーシステム

DESIGN & MANUFACTURE

HEAVY DUTY CONVEYOR EQUIPMENT




HEAVY DUTY



DURABILITY



EFFICIENCY

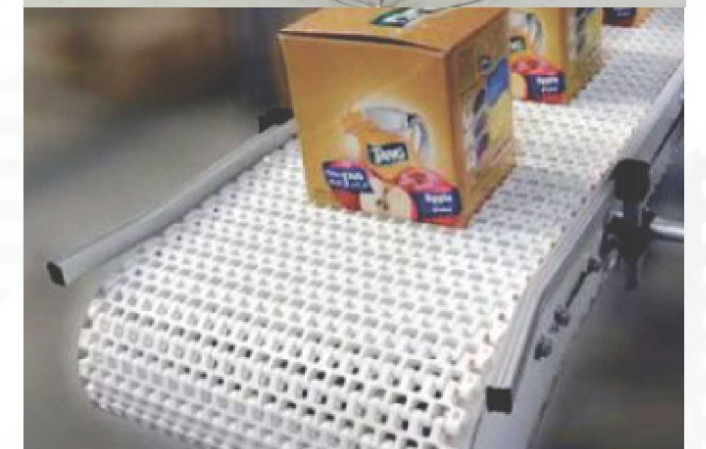

www.indotara.co.id

INDOTARA

ABOUT US



Shigemitsu Conveyor Equipment Limited is a professional conveyor. We have been working in this industry for more than five years, many of our clients hail from the express industry, food & beverage production, health and beauty, garment handling, home appliances, electronic, optical, warehouse and automotive industries. With our strong engineering background and many years of experience, we can advise you on the right products. Our goal is to provide cost effective conveyors which add value to your business.

MAIN PRODUCTS

- Truck Loading Conveyor
- Flexible Powered Roller Conveyor
- Telescopic Belt Conveyor
- Modular Belt Conveyor
- Slat Band Conveyor
- Flexible Gravity Roller Conveyor
- Flexible Skate Wheel Conveyor
- Roller Conveyor
- Belt Conveyor
- Vertical Lifting Conveyor

OUR SERVICE

Global Market

- Developed Countries
- Developing Countries
- No Developing Country



TRUCK LOADING CONVEYOR



FEATURES

- Load & unload trailer/vans/truck/containers
- 50kg/m load capacity
- T=5mm high grip belt
- 1.5 & 2.2 kw Taiwan motor
- 10-20m/min variable speed
- 700-2500mm adjustable height



STLC-G600

(Front part : 4m powered rollers)



STLC-P600

(Front part : 6m gravity wheels)



STLC-S

(Smaller Version of STLC-P600)



Combine with flexible conveyors to offloading cartons into warehouse



Combine with belt conveyors to loading bags from warehouse to containers



Offloading 20Ltr Jerry Cans from Vans

SPECIFICATION

Model	Front Tongue	Belt Width	Lifting Height	Variable Speed	Max.Load	Belt Motor	Lift Motor	Power Supply	G.W.	MEAS
STLC-P600	Powered	600mm	700-2500mm	10-20m/min	50kg/m	1.5kw	2.2kw	380/220/110V	780kgs	5.5cbm
STLC-G600	Gravity	600mm	700-2500mm	10-20m/min	50kg/m	1.5kw	2.2kw	380/220/110V	780kgs	5.5cbm
STLC-S	Powered	600mm	800-1900mm	10-20m/min	50kg/m	1.5kw	2.2kw	380/220/110V	650kgs	4.5cbm

FLEXIBLE POWERED ROLLER CONVEYOR



FEATURES

- High quality SIEGLING brand 0-ring belts
- DELTA inverter and SCHNEIDER elements
- Precise bearings guarantee low noise
- Curved joint plates with better figure and load
- Functional independent electric box
- Universal castors with lock brake



High Quality Taiwan Motor



Supply power for additional sections by Air plug



Flexible Stainless Steel Roller Conveyor



Flexible Roller Conveyor with Side Guide Wheels



Connect two or more units quickly and easily

SPECIFICATION

Model	Open Length	Effective Width	Adjustable Height	Variable Speed	Max. Load	Motor	Power Supply
SFPR	6m~15m	600mm	700-1000mm	10-18m/min	40kg/m	60w/mtr	220V



Take curve easily in crowded warehouse



Anti-skidding Rubber Coated Roller Conveyor



Transport tea bags into elevator

FLEXIBLE GRAVITY CONVEYOR



Model : SFGR
Flexible Gravity Roller Conveyor

These flexible gravity conveyors are perfect for conveying small and medium sized flat-bottom items in harbor, dock, warehouse/stores, factory, etc. It is extendable, retractable and bendable, which can take curves flexibly even in zigzag narrow aisles. The crossed skate-wheels make sure that the conveyed goods will be automatically oriented and not fall down from sides. The conveyor largely facilitates goods delivery work.

Model : SFGW-P
Flexible Gravity Nylon Skate Wheel Conveyor

Model : SFGW-S
Flexible Gravity Steel Skate Wheel Conveyor



Model	Open Length	Effective Width	Adjustable Height	Max. Load	Material
SFGR	5m~15m	600-800mm	700-1000mm	50kg/m	Ø50mm steel rollers
SFGW-S	6m~15m	600-450mm	700-1000mm	40kg/m	Ø50mm steel wheel
SFGW-P	6m~15m	600-450mm	700-1000mm	40kg/m	Ø48mm plastic wheels

TELESCOPIC BELT CONVEYOR



FEATURES

- Suitable for all kinds of goods
- Adjustable speed & height
- Various length options
- Safe and easy operation
- Reduce labor cost and work intensity
- Increase efficiency

Telescopic Belt Conveyor is automatic loading & unloading equipment which can extend directly into 20ft and 40ft containers. This conveyor is widely used in logistics, ports, docks, stations, airports and warehouse. Involving industries of post, home appliances, food, tobacco and light industry. It saves time of carrying back and forth, therefore makes the delivery work more efficient and less intensive, meanwhile also does less damage to the goods and help enterprise decrease costs and increase efficiency and quality.



Telescopic Belt Conveyor applied in warehouse with docks

Loading parcels into containers

Loading cartons directly from truck to 2nd floor

SPECIFICATION

Model	Fixed Length	Extended Length	Total Length	Min. Height	Belt Width	Belt Speed	Boom Speed	Max. Load	Power Supply
STBC-3-4.5/6	4.5m	6m	10.5m	750mm	600/800	15-30m/min	Max.12 m/min	50kg/m	380V
STBC-3-6/8	6m	8m	14m	750mm	600/800	15-30m/min	Max.12 m/min	50kg/m	380V
STBC-4-6/12	6m	12m	18m	800m	600/800	15-30m/min	Max.12 m/min	50kg/m	380V
STBC-4-7/14	7m	14m	21m	800m	600/800	15-30m/min	Max.12 m/min	50kg/m	380V

BELT CONVEYOR



SPECIFICATION

- Model : SBC
- Length : 1m-20m
- Belt Width : 300 - 1000mm
- Height : 700 - 1000mm
- Belt Material : PVC, rubber
- Speed : 10 - 20m/min
- Motor Power : 0.4/0.75/1.5/2.2kw
- Load Capacity : 10-80 kg/m
- Additional Parts : Lights, worktable, goods shelf, operation board, drawer, etc.

Belt Conveyor is widely applied in light industry, food, medicine and daily chemical industries. The conveyor can be equipped with working tables on both sides. With optional lights, air tubes, tool hooks, operation boards, instrument desks and sockets, it can act as various assembly lines. The advantages of belt conveyors are : large and stable distribution, little noise, simple structure, easy maintenance, low energy consumption and cost. Belt Conveyors can be customized in different specifications, materials, load capacity and other special functions.



PVC Belt Conveyor

Inclined Cleats Belt Conveyor



Two level belt conveyor for loading containers

Wide belt conveyor for solar panels

Climbing High Grip Belt Conveyor

ROLLER CONVEYOR



Motorized Roller Conveyor can be driven by either single or double chain. This feature is large, continuous and flexible transmission, which is often found in the application of items confluence and diversion. The conveyor can be customized as per specific requirement in specifications, as well as forms like positive motion, accumulation and adjustable accumulation.




Telescopic Gravity Roller Conveyor for offloading containers



Loading parcels into containers



Motorized Stainless Steel Roller Conveyor

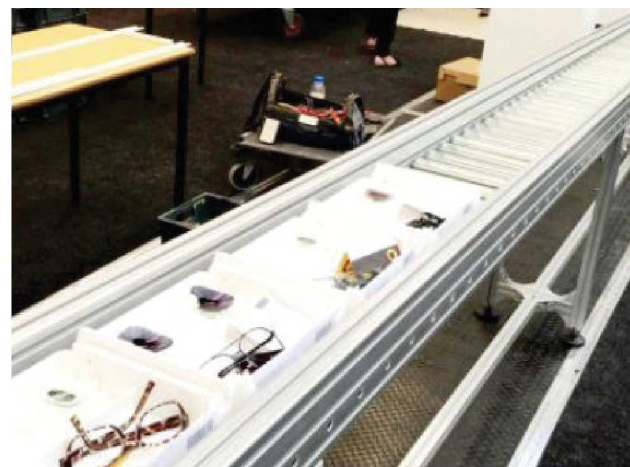

Gravity Roller Conveyor in Aluminium Frame




Inclined Gravity Roller Conveyor

SPECIFICATION

- Model : SRC
- Length : 1m-15m
- Roller Width : 300-1000mm
- Height : 700-1000mm
- Roller Space : 75/100/150mm
- Max.Load : 1000kg/m
- Speed : 10-20m/min
- Motor Power : 0.4/0.75/1.5/2.2/3.7 kw


VERTICAL LIFTING CONVEYOR

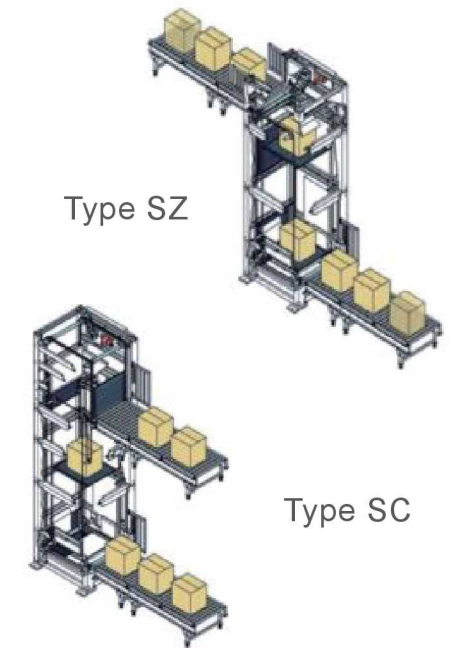

Vertical lifting conveyor is mainly applied to convey box-shaped items continuously & vertically. Bottom of boxes at least to be 350mm*350mm. Based on input and output direction, there are two types : Type SC & Type SZ.

FEATURES:

1. High efficiency : no wasted time from reverting pallets, high efficiency.
2. Continuous working in two ways.
3. Fully automatic with input and output conveyors.
4. Compact in size, either indoors or outdoors.

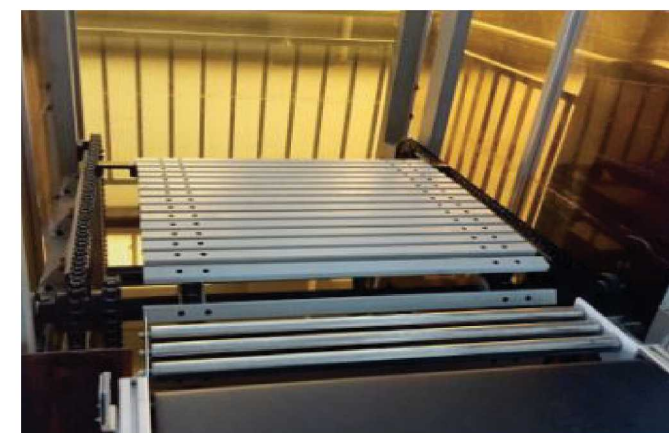

Input



Output

SPECIFICATION

Model	Min. Lift Height	Max. Lift Speed	Beat	Max. Load	Goods
Type SC	1500mm	30m/min	Max.10pcs/min	500kg	Cartons/boxes/pallets
Type SZ	1000mm	40m/min	Max.30pcs/min	2000kg	Cartons/boxes/pallets

SLAT BAND CONVEYOR



Slat Band conveyor can be customized according to specific purposes. The conveyor owns great load capacity up to 800kg/m. With simple structure, nice figure, stable running and easy maintenance, it is widely chosen by beverage/beer industry, food industry, medicine industry, printing industry and cosmetics industry.



Plastic Slat Chain Conveyor



Steel Slat Chain Conveyor

SPECIFICATION

- Model : SSBC
- Size and Shap : Optional
- Belt Width : 63.5-304.8 mm
- Speed : 10-20m/min
- Load Capacity : 50-800kg/m



Plastic slat band conveyor transport water cans



Refrigerator Assembly Line

MODULAR BELT CONVEYOR



SPECIFICATION

- Model : SMBC
- Length : 1.5m-20m
- Belt Width : 300-1000mm
- Belt Material : PP/PE/POM/NYLON
- Frame Material : Steel, Stainless steel, Aluminum
- Speed : 10-20m/min
- Motor Power : 0.4/0.75/1.5/2.2kw
- Load Capacity : 10-80kg/m

Modular belt conveyor is widely applied in the slaughter and processing of poultry or livestock, putted food production lines, fruit packing lines, fishery processing and production lines, frozen food production lines and beverage manufacturing, also popular in machine, daily chemical and other industries. This belt is moulded once with plastic material of hygienic standard, which guarantees the good stability, chemical resistance and friendliness to environment.



Stainless steel mesh conveyor



Inclined Plastic Mesh Belt Conveyor



Oil filling line



Transport fruits cartons



Elevating Plastic Modular Belt Conveyor