

HEAVY DUTY

POWER TILLER



Best Selling Model



Strong Power For Tough Work





Strong And Long Lasting Durability



Compact Design And Lighter Weight

"Optimize your agricultural output by using our advanced farming tools equipped with precision technology. Increase operational efficiency, save resources, and maximize your yield. Together with us, let's increase agricultural productivity towards a sustainable and profitable future."

TABLE OF CONTENT

 TPT750	1
 TPT900	2
 TPT1000	3
 TPT1000D	4
 TPT1050/TPT1350	5
 TPT1050D/TPT1350D	6
 TPT400	7
 TPT600	8
 TPT1350-5	9
 Tiller Accessories	10

TPT750



OPTIONAL



Tool Case



New Handle



Handle Light



Best Selling Model



Various Applications



Lightest Aluminum Gearbox



TILLER

Tilling Width(mm)	600-750
Tilling Depth(mm)	150-300
Gearbox Oil Capacity(l)	0.8
Shifting Gears	-1,0,2,0,1(-1,0,2,1)
Transmission Mode	Belt
Transporting Wheels	3.50-6
Tilling Blades	2+1 group 24 pcs

ENGINE

Engine Model	TEMCO Gasoline Engine T210-G
Displacement(cc)	212
Max Output(hp.kw/rpm)	7 (4.4) /3600
Starting System	Recoil Start
Engine Oil Capacity	0.6
Fuel Tank Capacity	3.5
Rate Rotating Speed	3600

PACKING

Packing Dimensions(mm)	820*380*780
Dimensions(mm)	1550*650*1050
N.W/G.W(kg)	63 / 71
Cont. Load (20 GP)	126
Cont. Load (40 HQ)	258

TPT900



OPTIONAL



Tool Case



Handle Light



360° Rotating Handle



Bumper



Blade Bracket



Light Weight



Various Applications



Strong Cast Iron Gearbox



TILLER

Tilling Width(mm)	600-950
Tilling Depth(mm)	150-300
Gearbox Oil Capacity(l)	1.0
Shifting Gears	-1,0,2,0,1(-1,0,2,1)
Transmission Mode	Belt
Transporting Wheels	4.0-8

ENGINE

Engine Model	TEMCO Gasoline Engine T210-G
Displacement(cc)	212
Max Output(hp.kw/rpm)	7 (4.4) /3600
Starting System	Recoil Start
Engine Oil Capacity	0.6
Fuel Tank Capacity	3.5
Rate Rotating Speed	3600

PACKING

Packing Dimensions(mm)	820*460*780
Dimensions(mm)	1500*750*1100
N.W/G.W(kg)	80 / 90
Cont. Load (20 GP)	105
Cont. Load (40 HQ)	210

TPT1000



OPTIONAL



Tool Case



Cover



360° Rotating Handle



Durable Direct Connection



Compact Design And Lighter Weight



TILLER	Tilling Width(mm)	750-1000
	Tilling Depth(mm)	150-300
	Gearbox Oil Capacity(l)	1.3
	Shifting Gears	1,0(-1) ,2
	Transsmission Mode	Gear
	Transporting Wheels	4.00-8
	Tilling Blades	3+1 group 24 pcs
ENGINE	Engine Model	TEMCO Gasoline Engine T210-G
	Displacement(cc)	212
	Max Output(hp.kw/rpm)	7 (4.4) /3600
	Starting System	Recoil Start
	Engine Oil Capacity	0.6
	Fuel Tank Capacity	3.5
	Rate Rotating Speed	3600
PACKING	Packing Dimensions(mm)	820*460*780
	Dimensions(mm)	1500*800*1100
	N.W/G.W(kg)	81 / 91
	Cont. Load (20 GP)	105
	Cont. Load (40 HQ)	210

TPT1000D



OPTIONAL



Tool Case



Cover



360° Rotating Handle



Handle



Durable Direct Connection



Compact Design And Lighter Weight



TILLER	Tilling Width(mm)	750-1000
	Tilling Depth(mm)	150-300
	Gearbox Oil Capacity(l)	1.3
	Shifting Gears	1, 0 (-1) , 2
	Transmission Mode	Gear
	Transporting Wheels	4.00-8
ENGINE	Tilling Blades	3+1 group 24 pcs
	Engine Model	TEMCO Diesel Engine T173-G
	Displacement(cc)	247
	Max Output(hp.kw/rpm)	5 (3.7) /3600
	Starting System	Recoil Start
	Engine Oil Capacity	0.75
	Fuel Tank Capacity	2.5
	Rate Rotating Speed	3600
PACKING	Packing Dimensions(mm)	820*460*780
	Dimensions(mm)	1500*800*1100
	N.W/G.W(kg)	88 / 98
	Cont. Load (20 GP)	105
	Cont. Load (40 HQ)	210

TPT1050/TPT1350



OPTIONAL



Tool Case



Cover



KM Handle



E-Start



	MODEL	TPT1050	TPT1350
TILLER	Tilling Width(mm)	800-1050	800-1350
	Tilling Depth(mm)	150-300	150-300
	Gearbox Oil Capacity(l)	2.0	2.0
	Shifting Gears	1,0(-1) ,2	1,0 (-1) ,2
	Transmission Mode	Gear	Gear
	Transporting Wheels	4. 0-8/5. 0-12	4. 0-8/5. 0-12
	Tilling Blades	3+1 group 32 pcs	3+1+1 group 40 pcs
ENGINE	Engine Model	TEMCO Gasoline Engine T225-G	TEMCO Gasoline Engine T390-G
	Displacement(cc)	223	389
	Max Output(hp.kw/rpm)	8 (5.0) /3600	11 (7.8) /3600
	Starting System	Recoil/Electric Start	Recoil/ Electric Start
	Engine Oil Capacity	0.6	1.1
	Fuel Tank Capacity	3.5	6.5
	Rate Rotating Speed	3600	3600
PACKING	Packing Dimensions(mm)	1050*570*780	1050*570*780
	Dimensions(mm)	1600*1050*1100	1600*1050*1100
	N.W/G.W(kg)	115 / 125	122/ 132
	Cont. Load (20 GP)	65	65
	Cont. Load (40 HQ)	132	132



Various Applications



Durable Direct Connection



Strong Power For Tough Work

TPT1050D/TPT1350D



OPTIONAL



Tool Case



Cover



E-Start



KM Handle



Handle Steering



Large Capacity Battery



TILLER

MODEL	TPT1050D	TPT1350D
Tilling Width(mm)	800-1050	800-1350
Tilling Depth(mm)	150-300	150-300
Gearbox Oil Capacity(l)	2.0	2.0
Shifting Gears	1,0(-1), 2	1,0 (-1), 2
Transmission Mode	Gear	Gear
Transporting Wheels	4. 0-8/5. 0-12	4. 0-8/5. 0-12
Tilling Blades	3+1 group 32 pcs	3+1+1 group 40 pcs

ENGINE

Engine Model	TEMCO Diesel Engine T178-G	TEMCO Diesel Engine TFA186-G
Displacement(cc)	296	418
Max Output(hp.kw/rpm)	6 (4.3) /3600	10 (6.3) /3600
Starting System	Recoil/Electric Start	Recoil/ Electric Start
Engine Oil Capacity	1.1	1. 65
Fuel Tank Capacity	3.5	5.5
Rate Rotating Speed	3600	3600

PACKING

Packing Dimensions(mm)	1050*570*780	1050*570*780
Dimensions(mm)	1600*1050*1100	1600*1050*1100
N.W/G.W(kg)	120 / 130	135/ 145
Cont. Load (20 GP)	65	65
Cont. Load (40 HQ)	132	132



Various Applications



Durable Direct Connection



Strong Power For Tough Work

TPT400



FEATURE



New Belt Cover



New Gearbox Design



New Tilling Blade



New Grass Cutting Blade



TILLER

Tilling Width(mm)	360-550
Tilling Depth(mm)	50-150
Gearbox Lubrication	Grease
Shifting Gears	1
Transmission Mode	Belt
Transporting Wheels	/
Tilling Blades	2 group 16 pcs

ENGINE

Engine Model	TEMCO Gasoline Engine T80-G
Displacement(cc)	79
Max Output(hp.kw/rpm)	2 (1.4) /3600
Starting System	Recoil Start
Engine Oil Capacity	0.35
Fuel Tank Capacity	2.5
Rate Rotating Speed	3600

PACKING

Packing Dimensions(mm)	720*380*660
Dimensions(mm)	1400*360*900
N.W/G.W(kg)	28.5 / 31
Cont. Load (20 GP)	144
Cont. Load (40 HQ)	396

TPT600



FEATURE



High&Low Gear



360° Rotating Handle



Rubber Covered Iron Wheel



Ditching Blade



TILLER

MODEL	TPT600	TPT600D
Tilling Width(mm)	620	800-1350
Tilling Depth(mm)	150-250	150-300
Gearbox Oil Capacity(l)	1.0	2.0
Shifting Gears	1,2,-1,-2	1,2,-1,-2
Transmission Mode	Belt	Belt
Transporting Wheels	3. 50-50	3. 50-50
Tilling Blades	3 group 18 pcs	3 group 18 pcs
Furrow Blades	5 pcs	5 pcs

ENGINE

Engine Model	TEMCO Gasoline Engine T225-G	TEMCO Diesel Engine T178-G
Displacement(cc)	223	296
Max Output(hp.kw/rpm)	8 (5.0) /3600	6 (4.3) /3600
Starting System	Recoil/Electric Start	Recoil/ Electric Start
Engine Oil Capacity	0.6	1.1
Fuel Tank Capacity	3.5	3.5
Rate Rotating Speed	3600	3600

PACKING

Packing Dimensions(mm)	1280*470*780	1280*470*780
Dimensions(mm)	1700*400*900	1700*400*900
N.W/G.W(kg)	98 / 114	114/ 130
Cont. Load (20 GP)	63	63
Cont. Load (40 HQ)	135	135

TPT1350D-5



OPTIONAL



Trailer



Reaper



Grass Cutter



Black Rotary



Grass Mower



Water Pump



Transmission Box













Handle Steering (Differential Clutch)



Auxiliary Shifting Lever

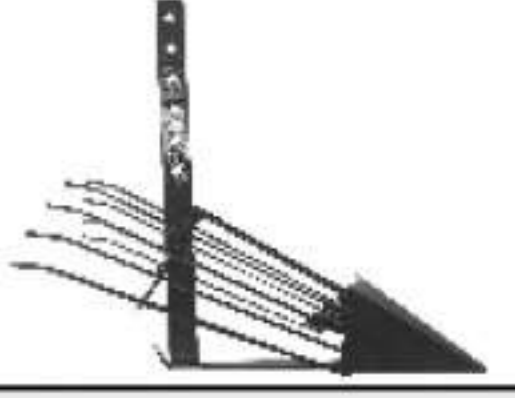

	MODEL	TPT900-5	TPT1000-5	TPT1000D-5	TPT1050-5	TPT1050D-5	TPT1350D-5	TPT1350D-5
TILLER	Tilling Width(mm)	900-950	750-1000	750-1000	800-1050	800-1050	800-1350	800-1350
	Tilling Depth(mm)	150-300	150-300	150-300	150-300	150-300	150-300	150-300
	Gearbox Oil Capacity(l)	1.0	1.3	1.3	2.0	2.0	2.0	2.0
	Shifting Gears	-1,0,1,2,3	1,0 (-), 2,3	1,0 (-), 2,3	1,0 (-), 2,3	1,0 (-), 2,3	1,0 (-), 2,3	1,0 (-), 2,3
	Transmission Mode	Belt	Gear	Gear	Gear	Gear	Gear	Gear
	Transporting Wheels	4.0-8	4.00-8	4.00-8	4.0-8/5.0-12	4.0-8/5.0-12	4.0-8/5.0-12	4.0-8/5.0-12
	Tilling Blades	3+1 group 24 pcs	3+1 group 24 pcs	3+1 group 24 pcs	3+1 group 32 pcs	3+1 group 32 pcs	3+1+1 group 40 pcs	3+1+1 group 40 pcs
ENGINE	Engine Model	TEMCO Gasoline Engine T210-G	TEMCO Gasoline Engine T210-G	TEMCO Diesel Engine T173-G	TEMCO Gasoline Engine T225-G	TEMCO Diesel Engine T178-G	TEMCO Gasoline Engine T390-G	TEMCO Diesel Engine TFA186-G
	Displacement(cc)	212	212	247	223	296	389	418
	Max Output(hp.kw/rpm)	7 (4.4) /3600	7 (4.4) /3600	5 (3.7) /3600	8 (5.0) /3600	6 (4.3) /3600	11 (7.8) /3600	10 (6.3) /3600
	Starting System	Recoil Start	Recoil Start	Recoil Start	Recoil/ Electric Start	Recoil/ Electric Start	Recoil/ Electric Start	Recoil/ Electric Start
	Engine Oil Capacity	0.6	0.6	0.75	0.6	1.1	1.1	1.65
	Fuel Tank Capacity	3.5	3.5	2.5	3.5	3.5	6.5	5.5
	Rate Rotating Speed	3600	3600	3600	3600	3600	3600	3600
PACKING	Packing Dimensions(mm)	820*460*780	820*460*780	820*460*780	1050*570*780	1050*570*780	1050*570*780	1050*570*780
	Dimensions(mm)	1500*750*1100	1500*800*1100	1500*800*1100	1600*1050*1100	1600*1050*1100	1600*1050*1100	1600*1050*1100
	N.W/G.W(kg)	80/90	81/91	88/98	115 / 125	120 / 130	122/132	135/145
	Cont. Load (20 GP)	105	105	105	65	65	65	65
	Cont. Load (40 HQ)	210	210	210	132	132	132	132

Tiller Accessories		TPT 750	TPT 900	TPT 1000	TPT 1000D	TPT 1050	TPT 1050D	TPT 1350	TPT 1350D	TPT 400	TPT 900-5	TPT 1000-5	TPT 1000D-5	TPT 1050-5	TPT 1050D-5	TPT 1350-5	TPT 1350D-5	TPT 600	TPT 600D	TPT 360
	Round Blade	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Anti-winding Blades	•	•	•	•	•	•	•	•	—	•	•	•	•	•	•	•	•	•	—
	Deep Hoe Blades	•	•	•	•	•	•	•	•	—	•	•	•	•	•	•	•	—	—	—
	Curved Dryland Blades	•	•	•	•	•	•	•	•	—	•	•	•	•	•	•	•	—	—	—
	Potato Rake	•	•	•	•	•	•	•	•	—	•	•	•	•	•	•	•	—	—	—
	Iron Wheel (Anti-sleep)	•	•	•	•	•	•	•	•	—	•	•	•	•	•	•	•	•	•	—
	Single Side Plow	•	•	•	•	•	•	•	•	—	•	•	•	•	•	•	•	—	—	—
	Paddy Wheels	•	•	•	•	•	•	•	•	—	•	•	•	•	•	•	•	•	—	—
	Ditching Blade	•	•	•	•	•	•	•	•	—	•	•	•	•	•	•	•	—	—	—
	Adjustable Ditching Blade	•	•	•	•	•	•	•	•	—	•	•	•	•	•	•	•	—	—	—

INDOTARA®

PT. INDOTARA PERSADA

Our Marketing Office and After Sales Service Center



Head Office

50/F, Menara BCA Grand Indonesia
Jl. M.H. Thamrin No.1
Jakarta Pusat 10310

021 - 5011 2224

dhe@indotara.id



Semarang Office

Wisma HSBC Lt. 6 Suite 609
Jl. Gajah Mada No.135
Semarang, Jawa Tengah 50134

024 - 40 300 889

smg.dhe@indotara.id



Bali Office

Benoa Square Lt. 2
Jl. Bypass Ngurah Rai No. 21 A Kedonganan,
Kuta Badung - Bali Indonesia 80361

021 - 5011 2224

bali.dhe@indotara.id



Marketing Office

APL Tower 6th Floor No. 6 Central Park,
Jl. Letjen S. Parman Kav 28,
Jakarta Barat - 11440

021 - 5011 2224

dhe@indotara.id



Medan Office

Sutomo Tower Lantai 5H
Jl. Sutomo Ujung No.28,
Kota Medan, Sumatera Utara 20235

061 - 50 300 592

mdn.dhe@indotara.id



Singapore Office

Marina Bay Financial Centre Tower 3
17F, 12 Marina Boulevard
Singapore - 018982

021 - 5011 2224

sing.dhe@indotara.id



Graha Indotara

Millenium Industrial Estate
Jl. Millenium 22 Blok R3 No. 1
Cikupa, Tangerang - Banten 15720

021 - 5011 2224

dhe@indotara.id



Makassar Office

Fajar Graha Pena Lt. 5
Jl. Urip Sumoharjo No. 20,
Makassar - South Sulawesi 90234

021 - 5011 2224

mks.dhe@indotara.id



Yogyakarta Office

Hartono Mall Yogyakarta Lt. 3
Kaliwaru, Condongcatur,
Sleman, Yogyakarta 55281

021 - 5011 2224

yog.dhe@indotara.id



Bandung Office

Wisma HSBC Lt. 6 Suite B
Jl. Asia Afrika No. 116
Bandung, Jawa Barat 40112

021 - 5011 2224

bdg.dhe@indotara.id



Balikpapan Office

Panin Tower Lt. 8 - Grand Sudirman
Jl. Jendral Sudirman No.7 Klandasan Ilir,
Balikpapan Kota, Kalimantan Timur 76114

021 - 5011 2224

bpp.dhe@indotara.id



Surabaya Office

Japfa Indoland Center, Tower I Lt. 10/1008
Jl. Jendral Basuki Rahmat 129-137
Surabaya 60271

031 - 3360 1485

sby.dhe@indotara.id