




TELECRANE®

Lee's Hi-Tech Ent. Co., Ltd.

F24 Industrial Radio Remote Controller

Reliable - High Performance - Economic

- Durable nylon-fiber housing for extra shock resistance
- Low power consumption with 2 AA batteries (last up to 2 months in normal operation)
- Operating range up to 100 meters
- Programmable function setting through Windows-based software
- Economic efficiency, ease of operation
- Pre-wiring standard cable making wiring procedures easier
- 100% compatible components reducing stock of spare part
- Safety features: 4.3 billion unique ID code
Hamming code
Enhanced watch-dog circuit

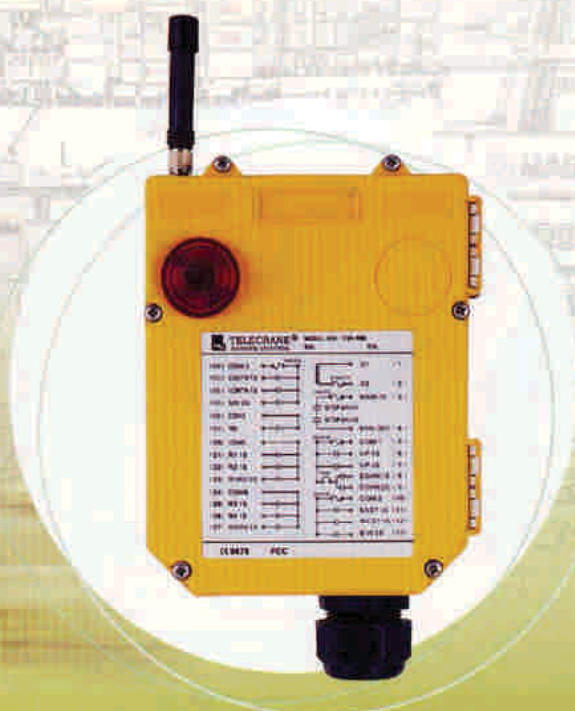

**Radio Control System best for
Crane/mobile/forestry application/lift equipment**

● F24-8 Series

- 8 Single/double step button
- 1 Emergency button
- 1 Start pushbutton
- 1 Rotary key switch



● F24-10 Series

- 10 Single/double step button
- 1 Emergency button
- 1 Start pushbutton
- 1 Rotary key switch




● F24 Receiver




Optional Accessories

Operating Temp.	-35°C ~ +80°C
Maximum range	100 M
TX power supply	2 AA size Alkaline batteries
RX power supply	AC 48/110/220/380 V DC 12-24 V
Protection class	IP 65 Industrial standard
ID Code	4.3 billion (32 bit)
Hamming Distance	> 4
TX Dimension & Weight	186 x 61 x 51 mm Apprx. 255g (w/o batteries)
RX Dimension & Weight	200x162x107mm Apprx. 1220g (w/o cable)


Optional Accessories

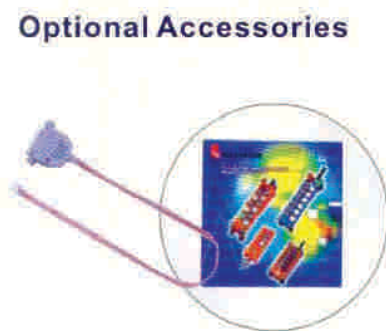

- CD Software & Program Cable



- Copier

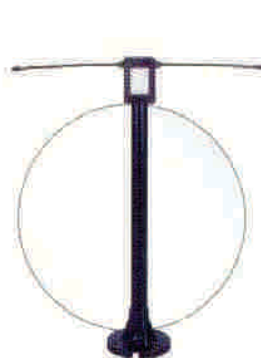

- Passive Antenna



- Transmitter Protective Cover

Other TELECRANE radio series



- *6/12 single/double-step pushbuttons and 5 step double joystick type
- *PLL Synthesizer radio frequency control



- *2/4/6 single/double-step pushbuttons
- *AC power supply is suitable for small crane/chain hoist
- *Also available with DC power supply (12-24VDC) suitable for mobile application