

UP-rAmp

MOBILE LOADING / UNLOADING



UP-rAmp

MOBILE LOADING / UNLOADING


Our mobile ramp is equipped with two hydraulic retractable leg. The two moveable lip on the front enable the ramp to float freely upward and downward with the upward and downward movement of the truck box floor. We use Italy "OILTEC" hydraulic pump (this is the best hydraulic pump for yard ramp in the world) and this enable our yard ramp to be easily operated manually, eliminating the need electrical operation.

Features

- Two moveable lip design facilitate the free lateral floating when the truck box floor move up and down.
- Two hydraulic retractable leg help to sustain the passage of heavy load during operation.
- Two solid tyres provide excellent traction without worry of puncture.
- The end bracket enable our yard ramp to be towable by forklift.
- Capacity : 6ton, 10ton, 15ton
- Steel grating on the slope floor prevent the forklift from slipping back during operation
- Top flat table is made of anti-skid steel plate.
- We use Italy "OILTEC" hydraulic pump and it enable our yard ramp to be operated manually with great ease, eliminating the need for electrical operation.
- Tapered lip edge provide a smooth transition between container and ramp.
- Two safety chain secure the fixing between ramp and truck box.
- Hydraulic pump adjust the ramp to the desired position
- Guard rail(curb) provide safety and direction for forklift movement.
- Can be 3-side loading or 2-side loading by adding lip on sides.
- Two rubber bumper absorb the shock between truck box and ramp.
- The dimension for every part can be customized to suit to actual demand.
- 10 years warranty on steel structure and 1 year warranty on hydraulic parts.
- Can be manually operated with a manual pump or electrically-operated with powerpack (optional).



Can be 3-side loading or 2-side loading by adding lips on sides

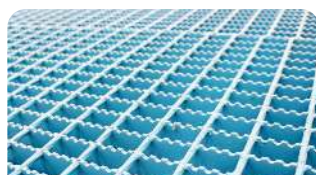

Steel Grating on Slope Floor



End Bracket Enable the Ramp to be Towable by Forklift



Hydraulic & Electrical




Steel Structure

Product Overview

Standard Parameters

Overall	: 11m
Outer width (total width)	: 2m
Inner width (useful width for forklift to pass)	: 1.9m
Lip length	: 400mm
Adjustable height range	: 1.2m ~1.7m
Slope floor length	: 8.2m
Flat table length	: 2.8m
Guard rail height	: 250mm
Wheel diameter	: 600mm

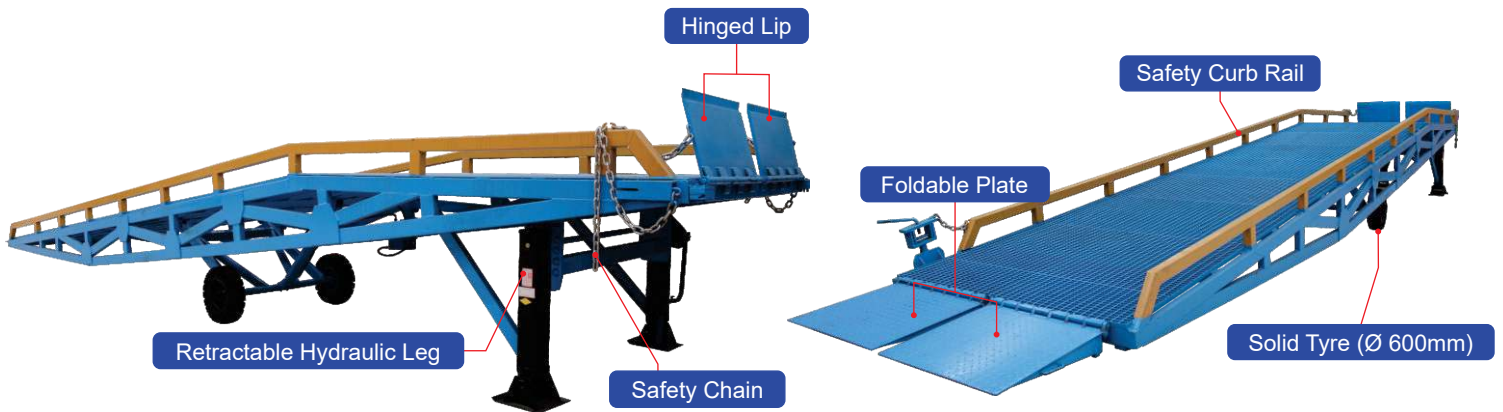

Product Specification

Type	PTR6WM	PTR6WME	PTR10WM	PTR10WME	PTR15WM	PTR15WME
Operation	Manual	Electric	Manual	Electric	Manual	Electric
Capacity	6 Ton		10 Ton		15 Ton	
Forklift Cap	1.5 Ton		3 Ton		5 Ton	
Slope length	8.2m		8.2m		8.2m	
Flat table length	2.8m		2.8m		2.8m	
Adjustable height	1.2 - 1.65m		1.2 - 1.65m		1.2 - 1.65m	
Total width	2m		2m		2m	
Inner width	1.9m		1.9m		1.9m	
Curb rail height	0.25m Towable by Forklift					
Slope material	Steel Grating with solid wheels					
Weight	2700kg		3200kg		3600kg	

Optional Power For Electrical :

- Voltage 220V/50Hz, 1 Phase, with Single Push Button (One Control Box with Single Push Button). Power Consumption 0.85 KW
- Voltage 380V/50Hz, 3 Phase, with Single Push Button (One Control Box with Single Push Button). Power Consumption 0.75 KW



INDOTARA®

PT. INDOTARA PERSADA

Jakarta Head Office :
Graha Kencana Building Lt. 10 Suite 10F
Jl. Raya Perjuangan 88
Kebon Jeruk Jakarta Barat 11530
Phone : 021 - 5020 3030
email : sales@indotara.co.id

Surabaya Branch Office :
Bumi Mandiri Tower I Lt. 10 Suite 1008
Jl. Jend. Basuki Rachmat 129-137
Surabaya 60271
Phone : 031 - 3313 3333
email : sales-sby@indotara.co.id

Medan Branch Office :
Kompleks MMTC Warehouse Blok C-7
Jl. Pasar V, Pancing
Medan 20371
Phone : 061 - 800 323 24
email : sales-mdn@indotara.co.id

Bandung Branch Office :
Wisma HSBC Lt. 6 Suite B
Jl. Asia Afrika No. 116
Bandung, Jawa Barat 40112
Phone : 022 - 310 30 800
email : sales-bdg@indotara.co.id